

Page 1 of 2 A000687990



A000687990

OFFICE OF THE COUNTY RECORDER
CASS COUNTY, MINNESOTA
CERTIFIED, FILED, AND/OR
RECORDED ON

9/15/2022 10:22:06 AM

AS DOC #: A000687990
PAGES: 2
REC FEES: 0.00

KATHRYN M. NORBY
CASS COUNTY RECORDER

BY KF Dep TX#: 184351


Index No. X.0-21.0

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 35, Township 140 N, Range 25 W
4TH Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 4/25/06 Placed a 3/4" REBAR WITH CAP STAMPED "MN DNR LS 16098"
DATE

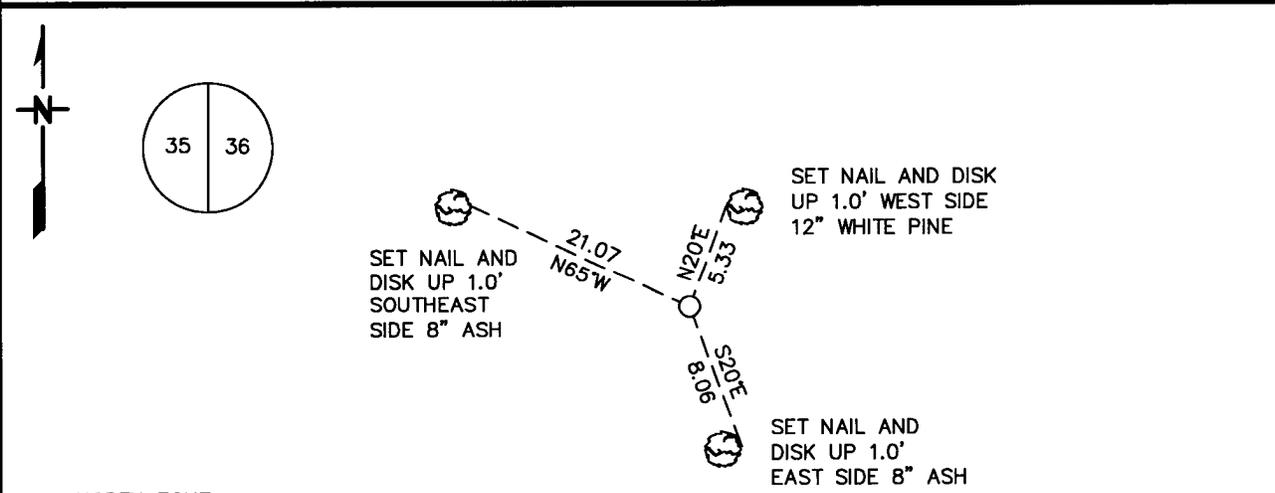

NORTH ZONE

CASS COUNTY
COORDINATE SYSTEM
NAD 1983 1996 ADJ.
N = 134287.59
E = 605167.96

BEARINGS ARE OBSERVED WITH A COMPASS

Statement of evidence for this corner location is on back of this page.

MARCH 2022
SFT00031

I hereby certify that this plan, specification, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

SIGNATURE Joseph L. Fleisher DATE MARCH 23, 2022 License Number 44974
JOSEPH L. FLEISHER



X.0 – 21.0

East Quarter Corner Section 35, Township 140 North, Range 25 West

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

- Minnesota Historical Society
- Cass County Surveyor’s Office
- Northstar Surveying
- Kramer Leas Deleo

1867 The US General Land Office field notes, on file in the Minnesota Historical Society, show this corner to be marked with a post and the following bearing trees were marked:

6” Fir	S 86 E	26 links	17.16 feet
20” White Pine	N 38 ½ W	23 links	15.18 feet

2006 In April the Department of Natural Resources survey crew searched for evidence of the corner but found nothing. They set a 3/4-inch rebar with cap stamped “MN DNR LS 16098” at the lost position and ties were taken. The position falls in an ash swamp approximately 100 feet north of a clearing.

Northeast corner Section 35 bears	N 00-46-05 E	2595.89
Southeast corner Section 35 bears	S 00-46-05 W	2595.89