

T142NR30W

Traverse

BOOK #1



Field Book
115300

T142NR30W

Traverse Bk. 1

T142 N R30W

INDEX

Establishment of CW $\frac{1}{16}$, AP.7, C $\frac{1}{4}$ Sec 28 Page 1

USFS, CASS COUNTY, MN

T142 N R30W

10/31/89 32°F Clear
30.0 Hg

R-GB
CK
MEH

Traverse from west $\frac{1}{4}$ corner of
Sec. 28 to Angle Point 4, Tract ¹⁵⁶⁷ 1345 for
re-establishment of the CW $\frac{1}{16}$, Angle
Point 7 and center-quarter of sec 28.

Instrument set up on a P.O.T. between
 $\frac{1}{4}$ corner and angle point 4

FS ³Angle
Pt 4 180-00-02

BS1 $\frac{1}{4}$ C 0-00-00

R @ 2 180-00-02


R 2 to 1	90-39-27	269-21-14	Slope Dist 1114.720	339.767	Horz 1114.647
----------	----------	-----------	------------------------	---------	------------------

2 to 3	90-50-02	269-10-30	2152.415	656.057	2152.187
--------	----------	-----------	----------	---------	----------

R at 2 to $\frac{1}{16}$ CW $\frac{1}{16}$	vert \times 90-14-53	Slope Dist 188.78	188.78
--	------------------------	----------------------	--------

R @ 2 to 5	vert \times 90-30-41	Slope Dist 840.865	840.832
------------	------------------------	-----------------------	---------

R @ 2 to 6	vert \times 90-42-23	Slope Dist 1492.325	1492.212
------------	------------------------	------------------------	----------

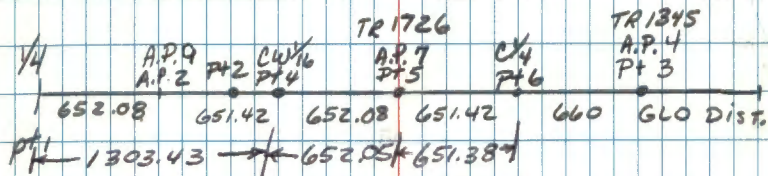

Distances written in ink is where the
monuments are set.

REST OF BOOK
IS EMPTY