

CORNER
RESTORATION
T145N R27W



MINING
TRANSIT BOOK

No. 384F


BOOK # 2

CORNER RESTORATION T145N R27W

T145N R27W
BOOK 2

Index

T 145N R 27W 5th Principal

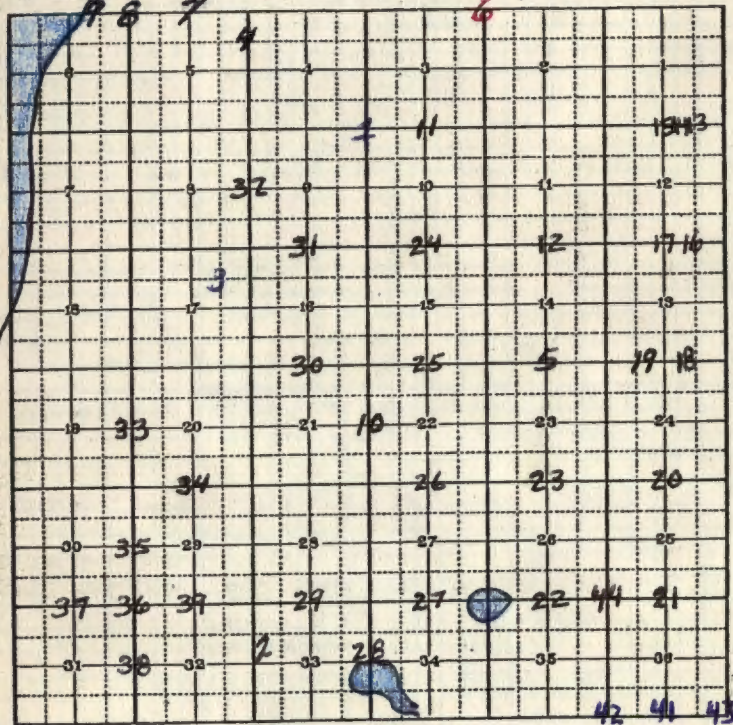

CASS COUNTY, MN USFS

E-13

Section Cor Sec's 3-4-9-10
Notes of orig govt survey
of 1873.

J. Pine 6" N52W ^{102 LKS.} 67.32

J. Pine 10" N26E ^{120 LKS.} 79.20

Searched 2 Max hrs. NO
evidence found.

11-1-66

James Esterson

874 CCC NOTES BY EDWARD JVERSEN

10/26/29

Fd. SQUARD SCRIBED STAKE 2"x2"x36"

Fd. J. PINE STUB 11 N24E 120 LKS.

Fd. DOWN LOG N51W 102 LKS.

FSLP ON ASPEN 11 ON NORTH SIDE OF STAKE

CORNER BRS. N12W 67 LKS. = 44.22'

NOTE ON BACK

OLD STAKE ROTTED - SET NEW STAKE IN ITS PLACE

CORNER IN MARSH GRASS - APPROX 1 CHAIN

E+W

T145N R27W E 1/4 Sec 32

7-22-82 Glenn P. Kasenko recovery
 Recovered: 2 1/2" O.D. iron pipe
 with a brass cap, 1.8 ft out
 of ground.

From which:

Red Pine, 23 in stub, S70°W, 12.40 ft (original)
 scr: 1/4 S BT visible

Cedar, 20 in, N37°E, 133.24 ft, scr: visible

Cedar, 16 in, S81°E, 67.90 ft, scare visible

Red Pine, 22 in, S11°W, 73.25 ft, scr: visible
 baseblaze offset from faceblaze and
 is not truly facing the corner

Sign post, North, 3.7 ft, map sign
 attached

Placed a ~~rod~~ nail in the side of each BT
 except the original red pine stub to
 measure from. Also 60d spike in
 baseblaze of each BT

See Book #1 T145N R27W
 pg 35

③

K-8

NE $\frac{1}{16}$ corner of Section 17,
T.145N R.27W

6-29-83 Dave Roerick & Stan Morrison
found a USFS Aluminum
location poster (approximate)
on the North side of a 14 inch
diameter Tamarack. Tag states
Approx Cor lies 70 links North
of Tag. Tag by W. Ross Tucker
and R. Lease on 3-28-61

③

Approx $\frac{1}{16}$ corner
center of NE $\frac{1}{4}$ Sec. 17,
T.145N, R.27W.

Aluminum tag on N.
side of 14" Tamarack
approx corner lies
70 links N. of tag.
This tag put up by
W. Ross Tucker &
R. Lease on 3-28-61

~~Stan Morrison~~ Dave Roerick &
Stan Morrison 6-29-83

④

B-9 NORTH 1/16 SECTION 4-5

R. MAIN 1/18/1989

SET A 2" X 4' GALVANIZED STEEL PIPE WITH
2 1/2" BRASS CAP. MONUMENT IS 6" ABOVE
GROUND. CAP STAMPED: T145N R27W

N 1/16
S 554
1989
U.S.F.S.

THIS MONUMENT SET @ PROPORTIONATE DISTANCE.

WITNESSED BY.

W. PINE 12" 573E 26.06 TO NAZI ^{SCRUBED} NY1654 BT

R. PINE 20" 534E 63.52 TO NAZI ^{SCRUBED} NY1654 BT

STEEL SIGN POST SOUTH 3.45' TO CENTER OF POST
THE W. PINE BEARING TREE HAD A APPROX TAG FROM
1960 BY STAN MORRISON.

④

1960 (MORRISON)

PLACED APPROX M.L.P. ON THE WEST SIDE
OF A 6" W. PINE.

5

QUARTER CORNER BET. SEC'S. 14+23
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST

TAM. 4 S10W 40 LKS. = 26.40'

TAM. 5 N65W 27 LKS. = 17.82'

874-CCC NOTES BY EMIL JUNTUNEN 11-22-29
 Fd. SCRIBED STAKE 2"x2"x36"

PLACED FSLP ON TAM. 13 - CORNER BRS.
 N86E 1 CHAIN = 66.0'

EDGE OF J. PINE - STAKE IS IN SWAMP

NOTES IN RED BY H.A. BRILLS 5/29/34

Fd. TAG ON TAM 10 S86E 1 CHAIN

ON WEST SIDE OF TREE - CORNER BRS. N86W
 1 CHAIN = 66.0'

7-19-66 S. MORRISON D. MORGAN

Fd TAG ON WEST SIDE 1/2" TAM. Fd old SCRIBED
 STAKE 1 CH WEST OF TAG. TAG ON OLD WDS ROAD
 11 CHAIN~~S~~ EAST OF CORNER.

5

11-02-2011

R. MAEN, Fd MORRISON TAG ON 20" PINE
 ON EAST SIDE OF WDS ROAD AND GPS. WALKED
 TO CORNER LOCATION AND FOUND NOTHING AT
 THIS TIME. FITS WELL WITH 1929 SWAMP
 AND EDGE OF J. PINE CALL.

6 CONTINUED FROM BOOK 1 Pg. 64

SECTION CORNER. 2-3-34-35

6" CONCRETE MONUMENT - IN GRASS

SLOUGH - TOP OF MONUMENT WAS

38" ABOVE GROUND - PROBABLY FROST

HAS PUSHED IT UP OVER THE YEARS

8-26-96 CK

LOWER CONCRETE MONUMENT TO 1.3'

ABOVE GROUND

MARKED NEW BT'S.

N. PINE 20 S43E 70.15' MKD S2 BT

N. PINE 18 N35E 156.20' MKD S35 BT

N. PINE 16 S78W 103.00' MKD, S3 BT

8' STEEL SIGN POSTS NORTH 4.15' WEST 4.10'

REMOVED 6' SIGN POST

Fd, 4" X 18" POST POINT LEANING WEST

ON WEST SIDE OF MONUMENT

AFTER MONUMENT WAS LOWERED PLACE

POST POINT AT NORTH SIDE ALONGSIDE

CORNER IS APPROX 150' NW OF COUNTY

ROAD #9 - NEWLY CONSTRUCTED THIS

PAST YEAR

4X4 CEDAR POST STILL IN PLACE

171' EAST OF CORNER - PAINTED RED

6
ORIG. GOVT. SURVEY 1873
SET WOOD POST

N. PINE 20 S10W 40 LKS. = 26.40'

N. PINE 8 S26 1/2 E 31 LKS. = 20.46'

N. PINE 10 N41W 39 LKS. = 25.74'

N. PINE 9 N44 1/2 E 30 LKS. = 19.80'

7

QUARTER CORNER BET. SEC'S. 5 + 32
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST

N. PINE 20 N36E 88 LKS. = 58.08'

N. PINE 24 WEST 38 LKS. = 25.08'

7

9-24-96 RM-CK
 SEARCH FOR '14 CORNER - GPS POSITION
 NOTHING FOUND TODAY - WILL COME BACK
 Fd. MANY BURNED STUMPS AND DOWN J. PINE

CORNER TO SECTIONS 5-6-31+32

ORIG. GOV'T. SURVEY 1873

SET WOOD POST

9 1/11 FD. STAIN FROM POST POINT USED AS COR.

N. PINE 14 S63 1/2 W 61 LKS. = 40.26

LARGE PINE STUMP PUSHED OUT - STP. HOLE PLAIN

N. PINE 16 S28 E 44 LKS. = 29.04

LARGE PINE STUMP - PUSHED OUT - STP. HOLE PLAIN

J. PINE 8 N76 E 70 LKS. = 46.20

NOW WELL ROTTED J. PINE STP. LEVEL N76 E - 46.2'

J. PINE 8 N35 W 37 LKS. = 24.42

NOW ROTTED REMAINS AT N35 W 24.4'

9-11-96 CK

USED BEARING AND DISTANCES FROM

STUMP REMAINS TO LOCATION OF POST

REMOVED DUFF + SCRAPE GROUND FD. / STAIN

WITH WOOD FIBERS UP + DOWN BUT THIS POINT

ONLY WENT DOWN ABOUT 8" - THEN FOUND

ANOTHER STAIN 10" TOWARDS NW WHICH

WENT DOWN TO A DEPTH OF 14" WITH

STRAIGHT EDGES VISIBLE AS IT WENT

DOWN TO POINT - SET SPIKE AT THIS

POINT AND USED AS TRUE CORNER

9-11-96 CK

FD. OLD RUSTED TAG ON 19" N. PINE ON EAST SIDE - DATED BY HANDY 1934 + E.J.B. 1954

9-18-96 RM + CK

IN PLACE OF SPIKE SET 2" X 48" IRON PIPE WITH BRASS CAP MARKED

T146N R27W

531	532
56	55

T145N

1996

USFS

MARKED NEW BT'S.

N. PINE 15 N43 E 9.55' MKD. 53 BT

N. PINE 12 1/2" S32 E 18.73 MKD. 55 BT

N. PINE 12 1/2" S20 W 55.08' MKD 56 BT

N. PINE 17 WEST 17.90' MKD BT OLD TAG

8' STEEL SIGN POST EAST 410'

CORNER FALLS AT BASE OF 10" N. PINE ON SOUTH SIDE

RAN LINE NORTH TO FR 3001 A 310'

PLACE TAG ON 85" N. PINE ON NORTH SIDE OF ROAD

330' SOUTH TO CORNER

See CORPS
Notes
Book A1-293

MEANDER CORNER BET. SEC'S. 6+31
ORIG. GOVT. SURVEY 1873
SET WOOD POST

CEDAR 24 S53E 130 LKS. =

CEDAR 10 S81E 139 LKS. =

GOVT. CHAIN 37.26 CHS. =

QUARTER CORNER BET. SEC'S. 21+22
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST

TAM. 3 S17W 39 LKS. = 25.74'

TAM. 3 N13E 90 LKS. = 59.40'

SURVEYED BY J. A. GJELHAUG 1937
 INFORMATION FROM NUSHKA TOWER PLAT

TAM. DEAD 3" SIZE 30 LKS. (ORIG. BT)

F.S. POSTER TAM. 3 S25E 52 LKS. = 34.32'

874 CCC NOTES. BY J. A. GJELHAUG
 4/23/37

Fd. SCRIBED POST (FAIR CONDITION)

SET NEW POST 48" LONG

Fd. TAM 3 (DEAD) SIZE 30 LKS.

SCRIBED 1/4 S BT

FSLP ON TAM 3 ON NORTH SIDE OF TREE
 CORNER BRS. N25W 52 LKS.

QUARTER CORNER BET. SEC'S. 3+10
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST

SPRUCE 4 S11W 9 Lks. = 5.94'

TAM. 4 S14E 63 Lks. = 41.58'

874 CCC NOTES BY ED. JVERSEN 10/23/29
 Fd. SQUAD SCRIBED POST 2" x 1 1/2" x 20"
 SCRIBED 1/4 S

NO BT'S.

PUT FSLP ON TAM. 12 SOUTH SIDE OF SEC.
 LINE - CORNER BRS. S12W 23 Lks. = 15.18'

NOTE: ON BACKSIDE
 FR 3010
 MARKER ON ROAD IS 6.14 CHS = 405.24' WEST
 OF CORNER

10-7-96 RMYCK
 G.P.S. A POSITION ON FR 3010B ON 10-3-96
 RAN NORTH 575 TO SEARCH AREA WHICH
 FALLS AT NORTH EDGE OF NORWAY PINE
 PLANTATION SW + NE-OLD LOGGING CAMP
 JUST TO SW OF SEARCH AREA
 NOTHING COULD BE FOUND IN 100' RADIUS
 OF SEARCH AREA - BELIEVE PINE PLANTATION
 HAS DESTROYED CORNER LOCATION
 CORNER CARD BY STAN MORRISON STATED HE
 PUT TAG ON 14" FORKED BIRCH - WE DIDN'T
 FIND ANY TRACE OF TAG OR PAINT

QUARTER CORNER BET. SEC'S. 11 + 14
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST

TAM. 3 SISE 14 LKS. = 9.24'

TAM. 3 S14W 19 LKS. = 12.54'

874 CCC NOTES By E.H. JUNTINEN 11/14/29

Fd. SCRIBED STAKE 2" X 4" X 60" SCRIBED 1/4 S

Fd. TAM. 2 N51W 11 LKS. = 7.26' MKD 1/4 S BT

TAM. 3 S65W 14 LKS. = 9.24' " " " "

874 CCC NOTES By H. A. BRILLS 4/16/34

Fd. SCRIBED WOOD STAKE 74" HIGH

Fd. DEAD TREE 3 N45W 11 LKS. =

Fd. SPRUCE 3 S65W 14 LKS. =

874 SHEET By J. LAUSCHE 4/29/58

Fd. SCRIBED POST 3" TWO FLAT SIDES

PUT FSLP ON SPRUCE 5" ON NORTH SIDE

CORNER BRS. N24W 10.7 FT.

MEANDER CORNER EAST BANK OF
MISSISSIPPI RIVER BET. SEC'S. 1+12
ORIG. GOV'T. SURVEY 1873
SET WOOD POST

J. PINE 5 N73E 38 LK_s = 25.08'

J. PINE 5 S84E 46 LK_s = 30.36'

MEANDER CORNER EAST BANK OF
MISSISSIPPI RIVER BET. SEC'S. 1+12
ORIG. GOV'T. SURVEY 1873
SET WOOD POST

J. PINE 5 N73E 38 LK_s = 25.08'
J. PINE 5 S84E 46 LK_s = 30.36'

14

MEANDER CORNER WEST BANK OF
MISSISSIPPI RIVER BET. SEC'S. 1+12
ORIG. GOVT. SURVEY 1873
SET WOOD POST

BIRCH 6 S68W 29 LKS = 19.14'

POPLAR 4 N70W 36 LKS = 23.76'

14A

MISSISSIPPI RIVER WEST BANK
MEANDER CORNER
ORIG. GOVT. SURVEY 1873
SET WOOD POST

QUARTER CORNER BET. SEC'S. 1412
ORIG. GOVT. SURVEY 1873
SET WOOD POST

J. PINE 6 SITE 19 LKS. = 12.54'

J. PINE 8 N13W 27 LKS. = 17.82'


26

MEANDER CORNER EAST BANK OF
 MISSISSIPPI RIVER BET. SEC'S. 12+13
 ORIG. GOVT. SURVEY 1873
 SET WOOD POST

N. PINE 16 N70E 70 LKs. = 46.20'

J. PINE 5 S57E 30 LKs. = 19.80'


26

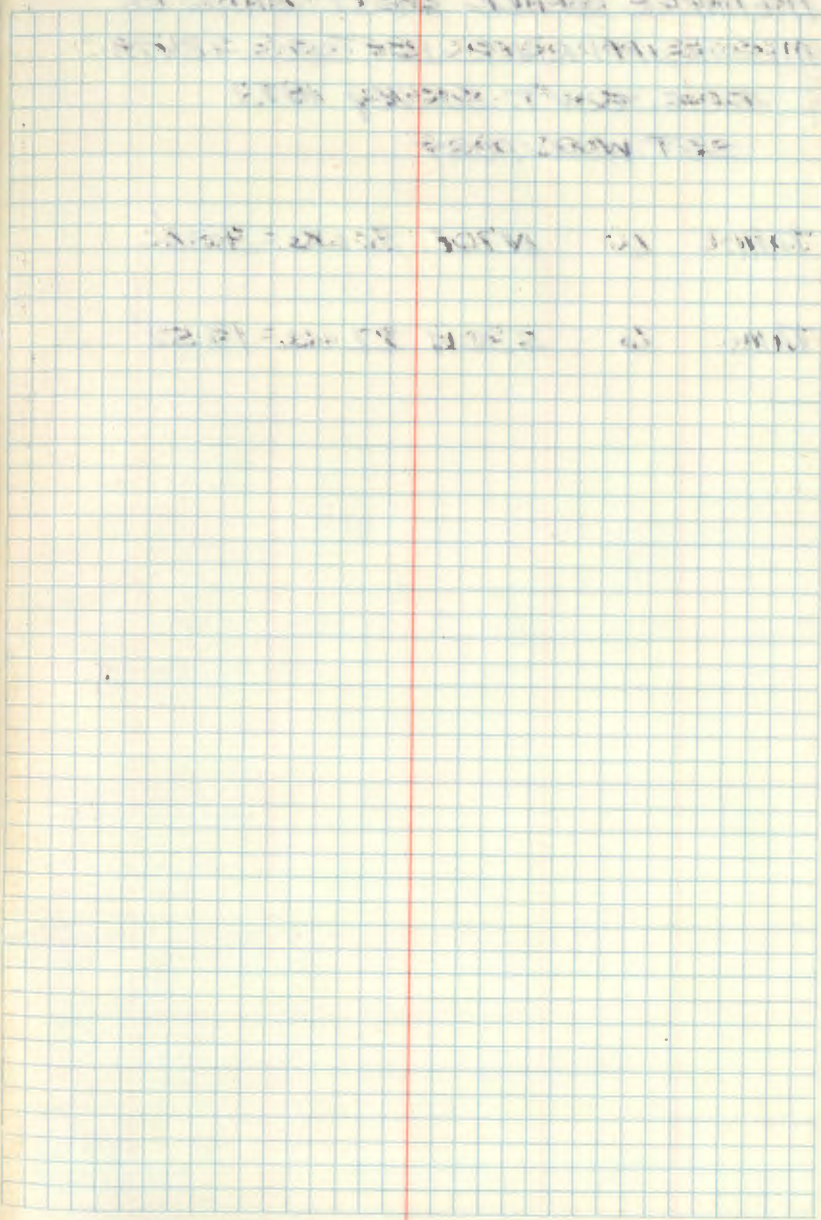

MEANDER CORNER WEST BANK OF
 MISSISSIPPI RIVER RET, SEC'S. 12+13
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST

TAM. 6 N3W 5 LKS = 3.30'

TAM. 6 S30W 22 LKS = 14.52'

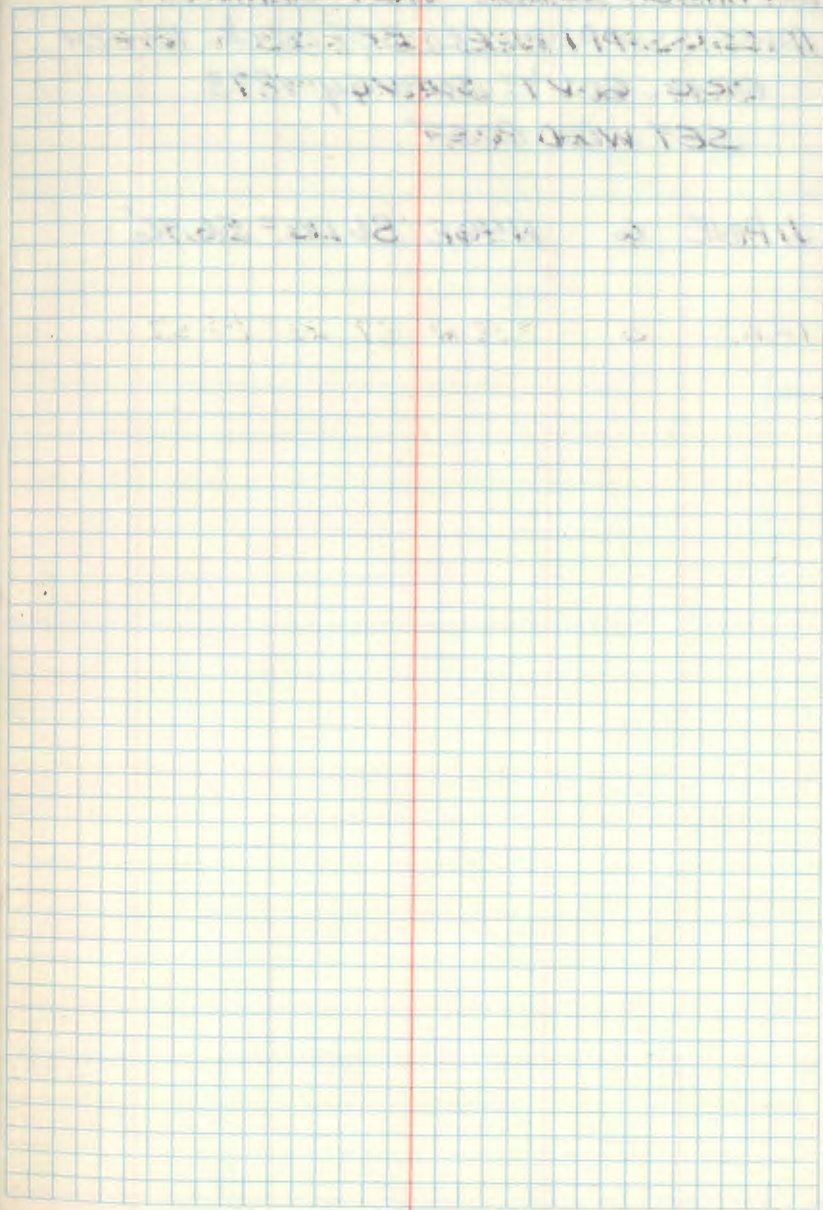

18

MEANDER CORNER EAST BANK OF
MISSISSIPPI RIVER BET. SECS. 13+24
ORIG. GOV'T. SURVEY 1873
SET WOOD POST

J. PINE 6 N46E 86 LKS = 56.76'

18

TO THE MEANDER CORNER EAST BANK OF
MISSISSIPPI RIVER BET. SECS. 13+24
ORIG. GOV'T. SURVEY 1873
SET WOOD POST

J. PINE 6 N46E 86 LKS = 56.76'

29

MEANDER CORNER WEST BANK OF
 MISSISSIPPI RIVER BET. SEC'S 13+24
 ORIG. GOVT. SURVEY 1873
 SET WOOD POST

N. PINE 18 N49W 36 LKS. = 23.76'

POPLAR 6 S19W 57 LKS. = 37.62'

29

20

QUARTER CORNER BET. SEC'S. 24+25
ORIG. GOV'T. SURVEY 1873
SET WOOD POST

TAM. 3 N17W 72 LKS = 47.52'

TAM. 3 S9E 80 LKS = 52.80'

20

QUARTER CORNER BET. SEC'S. 24+25
ORIG. GOV'T. SURVEY 1873
SET WOOD POST

TAM. 3 N17W 72 LKS = 47.52'

TAM. 3 S9E 80 LKS = 52.80'

21:

QUARTER CORNER BET. SEC'S. 25+36

ORIG. GOV'T. SURVEY 1873

SET WOOD POST

J. PINE 4 N48W 12 LKS. 7.92'

J. PINE 4 S42E 10 LKS. = 6.60'

21

22

QUARTER CORNER BET. SEC'S. 26 + 35
ORIG. GOV'T. SURVEY 1873
SET WOOD POST

TAM. 3 S19W 21 LKS. = 13.86'

TAM. 3 N80E 34 LKS. = 22.44'

22

22405 2102 188 50000 000000
1873 1873 1873 1873
1873 1873 1873 1873
1873 1873 1873 1873

23

QUARTER CORNER BET. SECS. 23+26
ORIG. GOV'T. SURVEY 1873
SET WOOD POST

J. PINE STUB 8 S33W 19 LK. = 12.54'

23

24

QUARTER CORNER BET. SECS. 10 & 15

ORIG. GOV'T. SURVEY 1873

SET WOOD POST IN SMALL MARSH

NO BT'S.

24

25

QUARTER CORNER BET. SEC'S. 15 & 22
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST

TAM. 4 N85E 10 LKS. = 6.60'

TAM. 3 S80W 18 LKS. = 11.88'

25

26

QUARTER CORNER BET. SECS. 22+27
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST

N. PINE 6 S $11\frac{1}{2}$ W 90 LKS. = 59.40'

N. PINE 9 N 70 E 27 LKS. = 17.82'

26

[Faint, illegible handwriting on a grid background]

27

QUARTER CORNER BET. SEC'S, 27+34
ORIG. GOV'T. SURVEY 1873
SET WOOD POST

TAM. 3 S10W 16 LKS = 10.56'

TAM. 3 N11W 19 LKS = 12.54'

27

MEANDER CORNER NORTH SHORE OF POND
 BET. SEC'S. 33+34
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST

TAM. 6 N36 $\frac{1}{2}$ W 85 LKS. = 56.10'

TAM. 6 N30E 62 LKS. = 40.92'

1873 GOV'T. SURVEY 1873

SECTION 33+34

WOOD POST

29

QUARTER CORNER BET. SEC'S. 28+33
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST

TAM. 3 N78W 16 LKS = 10.56'

TAM. 3 S13E 12 LKS = 7.92'

29

QUARTER CORNER BET. SEC'S. 28+33

ORIG. GOV'T. SURVEY 1873

SET WOOD POST

TAM. 3 N78W 16 LKS = 10.56'

TAM. 3 S13E 12 LKS = 7.92'

30

QUARTER CORNER BET. SEC'S. 16+21
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST

POPLAR 6 S73W 18 LKS. = 11.88'

ELM 7 N10E 75 LKS. 49.50'

30

QUARTER CORNER BET. SEC'S. 16+21

ORIG. GOV'T. SURVEY 1873

SET WOOD POST

POPLAR 6 S73W 18 LKS. = 11.88'

ELM 7 N10E 75 LKS. 49.50'

QUARTER CORNER BET. SECS. 9+16
ORIG. GOV'T. SURVEY 1873
SET WOOD POST

TAM. 3 N67E 11 LKS = 7.26'

NO OTHER

32

QUARTER CORNER BET. SEC'S. 8+9
ORIG. GOV'T. SURVEY 1873
SET WOOD POST

TAM. 3 N75W 35 LKS. = 23.10'

TAM. 3 S73E 8 LKS. = 5.28'

32

PIEDMONT DISTRICT
SOUTH CAROLINA
COUNTY OF ...

SECTION 3 TOWNSHIP 34 N RANGE 12 W

SECTION 8 TOWNSHIP 34 N RANGE 12 W

QUARTER CORNER BET. SECS, 19+20
ORIG. GOV'T. SURVEY 1873
SET WOOD POST

J. PINE 12 S49E 14 LKS. = 9.24'

J. PINE 14 S74E 16 LKS. = 10.56'


QUARTER CORNER BET. SEC'S 20+29
 ORIG. GOV'T. SURVEY 1873

POPLAR 3 S10W 29 LKS = 19.14'

POPLAR 4 N42E 83 LKS = 54.78'

QUARTER CORNER BET. SEC'S. 29 & 30
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST

TAM. STUB 6 N45E 65 LKS. = 42.90'

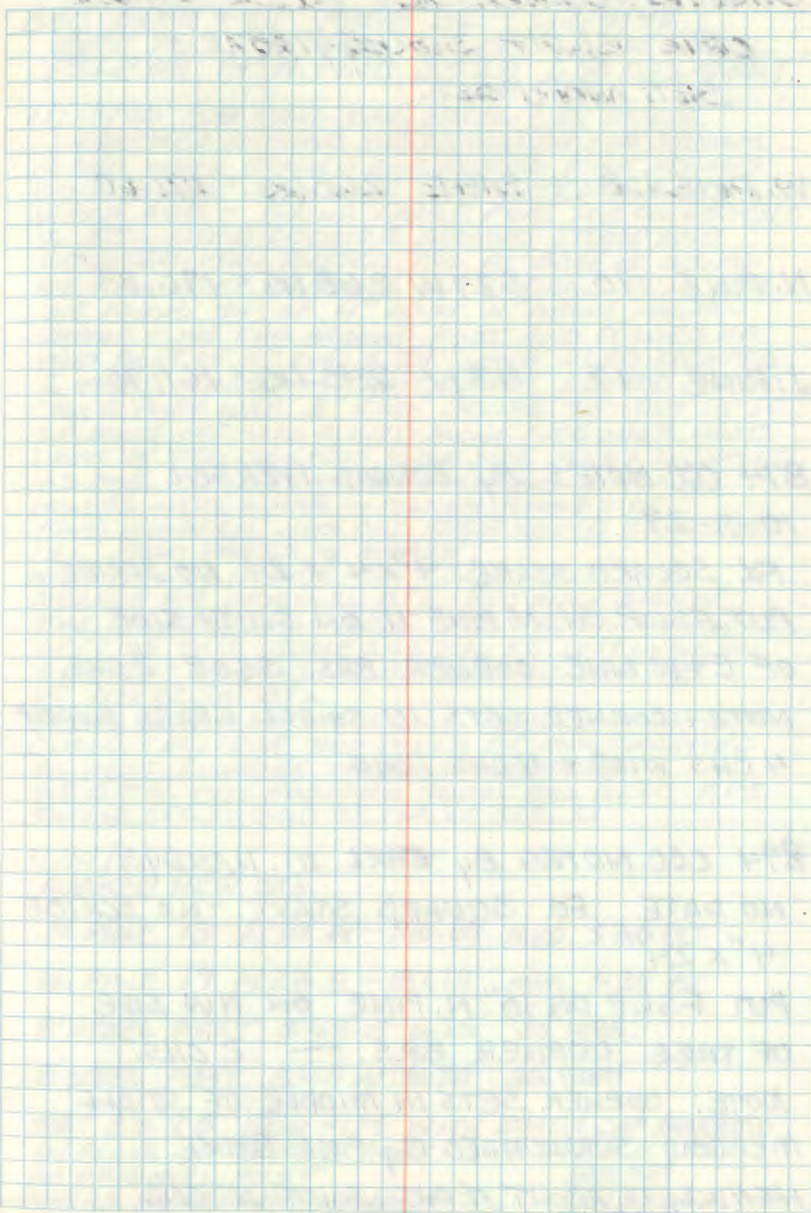

CORNER TO SECTIONS 29-30-31+32
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST

W. PINE 8 S14E 260 LKS. = 171.60'

N. PINE 10 S27W 268 LKS. = 176.88'

J. PINE 12 N3W 245 LKS. = 161.70'

874 CCC NOTES BY EDWARD IVERSEN

10-3-29

FD. SQUARD STAKE 4" X 4" X 24" NO SCRIBE
 PUT FSLP ON N. PINE 11 ON SOUTH SIDE
 OF E+W LINE CORNER BRS. S60E 2 CHS.

NOTE: CORNER SETS IN SMALL GRASS SWAMP
 4 CHS. WIDE + 4 CHS. LONG

874 CCC NOTES BY EARL M. HANDY

NO DATE FD. SQUARD STAKE - NO SCRIBE
 4" X 24"

PUT FSLP ON 10" N. PINE ON NW SIDE
 OF TREE CORNER BRS. — 2 CHS.

NOTE: CORNER SETS IN MIDDLE OF SMALL
 MEADOW SURROUNDED BY PINE RIDGE
 HIGHWAY IS ABOUT 4 CHS. SOUTH OF COR.

CCC BOOK #17 PAGE 32 2/4/42
 SET POST 4" X 60" AT APPROX. CORNER
 FSLP ON 14" N. PINE S52E 1.98 CHS. = 130.7'

11/13/96 ROB MAIN - GARY BRAMA - CURT KRAUSE
 SEARCHED AROUND GRASS MARSH FOR STUMPS
 FOUND MANY BURNED AND ROTTED PINE STUMPS
 WHICH SHOW THEY HAVE BEEN CUT OFF MANY
 YEARS AGO - FOUND LARGE PINE LOG ON GROUND
 TO SE - USED LOCATOR AROUND STUMP AND
 LOCATED VERY RUSTED TAG AT BASE OF STUMP
 WE NOW TAKE BEARING N52W AND RULL 130'
 WE FOUND TOP OF 4" POST 4" ABOVE FROZEN
 SWAMP - WE DUG AROUND POST AND PULLED UP
 THIS POST IS 4" DIA. X 24" LONG ALSO LOCATED
 2 OTHER POSTS - 1 ASPEN POST SQUARD 3" X 60"
 OTHER POST WAS 3" X 60" SQUARD TOP - BUT 18" OF
 TOP BROKE OFF - WAS PLACED ALONG SIDE OTHER POSTS
 DROVE 8" STEEL SIGN POST ALONG SIDE 4 X 4 X 24" POST
 AS PINE POST WAS FOUND STANDING IN PLACE
 OTHERS WERE LYING IN MARSH - ALONGSIDE
 PINE WINDFALL WITH OLD FSLP WOULD BE S52E
 131' FROM POSTS IN MARSH
 WINDFALL IS N. PINE 20" E S52E 131.0'
 SEARCH FOR ORIGINAL BT'S - BUT ONLY SIGN OF
 PINE STUMP WAS AT S14E - 172' - BUT NOT MUCH IS
 LEFT OF THIS STUMP AND MAY BE JUST LYING ON
 GROUND - NO TRACE AT BEARING AND DISTANCE
 OF NW OR SW BT'S.
 POSTS WOULD FIT ORIGINAL TIES E+W FAIRLY
 CLOSE - BELIEVE THIS COULD BE MONUMENTED
 AS BEST EVIDENCE OF SECTION CORNER
 WE G.P.S. THIS POSITION TODAY AND ALSO GPS
 SW COR. SEC 30 AND SE COR. OF SEC. 31

11/14/96 CK
 MARKED NEW BT'S.

N. PINE 13 N14 W - 160.04' MKD. S30 BT

N. PINE 19 N23 E - 187.13 MKD. S29 BT

8" STEEL POST. S45 E 6.75' 36" HIGH

8" STEEL POST S45 W 6.70' 36" HIGH

SET 2 1/2" X 5" IRON PIPE WITH BRASS CAP MARKED
 IN PLACE OF 4" PINE POST T145 N R27 W
 AS ORIGINAL POST S30 S29
 OTHERS PLACED ALONGSIDE - S31 S32
 IRON PIPE OVER SIGN POST. 1996
 USFS

QUARTER CORNER BET. SEC'S, 30+31
ORIG. GOV'T. SURVEY 1873
SET WOOD POST

NO TREES

QUARTER CORNER BET. SEC'S, 30+31

ORIG. GOV'T. SURVEY 1873

SET WOOD POST

NO TREES

38

QUARTER CORNER BET. SEC'S. 31+32
ORIG. GOVT. SURVEY 1873
SET WOOD POST

J. PINE 8 NSE 520 LK = 343.20'

38

QUARTER CORNER BET. SEC'S. 31+32


ORIG. GOVT. SURVEY 1873

SET WOOD POST

J. PINE 8 NSE 520 LK = 343.20'

QUARTER CORNER BET. SEC'S. 29+32
 ORIG. GOV'T. SURVEY 1873
 SET WOOD POST


NO TREES STANDING

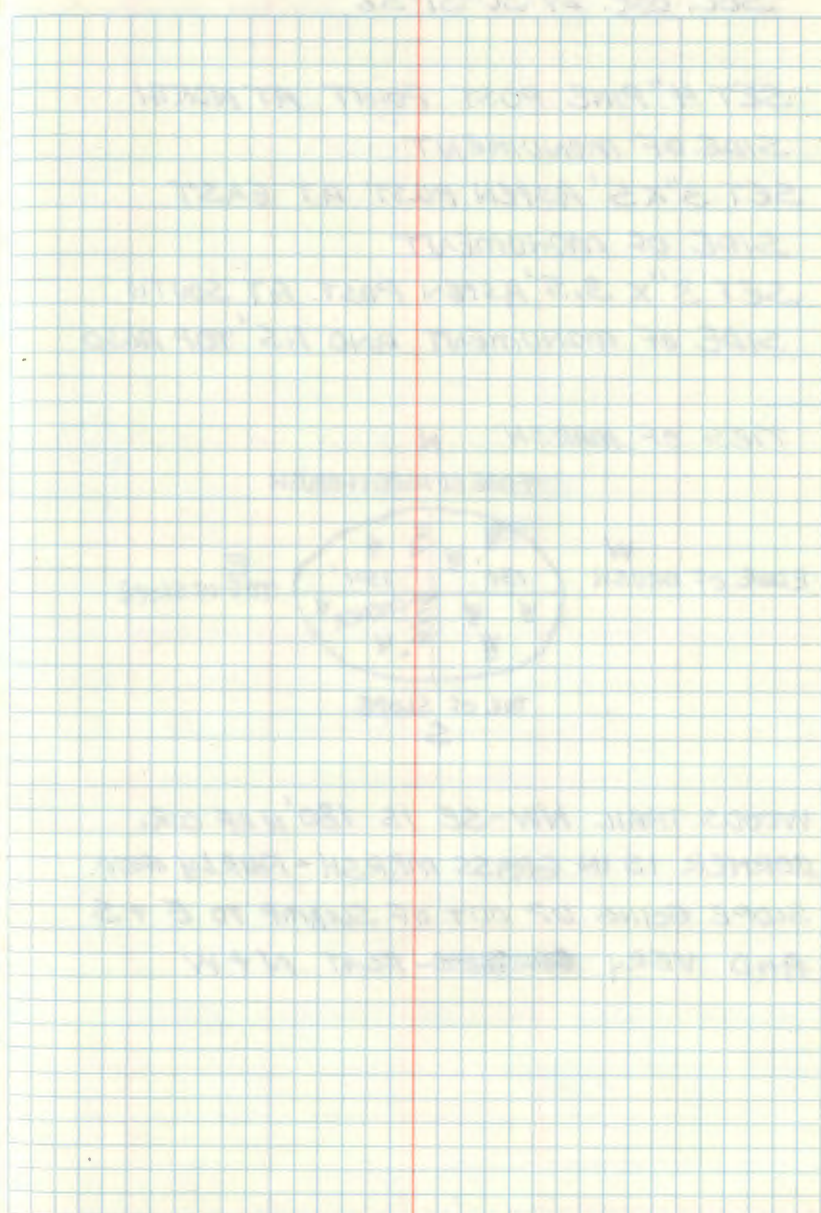

40 CONTINUED FROM PAGE 36 THIS BOOK
SEC. COR. 29-30-31-32

SET 4" PINE POST POINT AT NORTH
SIDE OF MONUMENT
SET 3" X 5' ASPEN POST AT EAST
SIDE OF MONUMENT
SET 3" X 3.5' ASPEN POST AT SOUTH
SIDE OF MONUMENT AND 1.5' TOP ALSO

TIES OF MARSH N

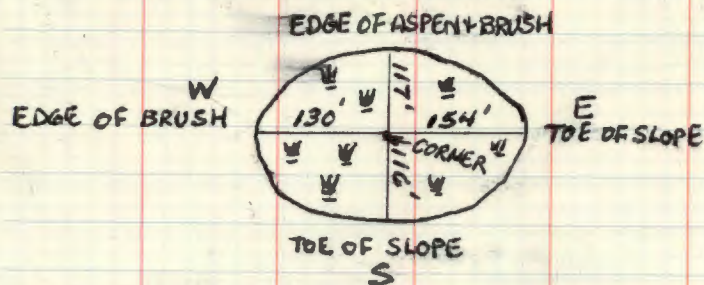

WOODS TRAIL NW-SE IS 180' N OF COR.
CORNER IS IN GRASS MARSH - FAIRLY GOOD
SLOPE GOING UP OUT OF SWAMP TO E + S
AND VERY ~~FLAT~~ FLAT N + W

41

STANDARD CORNER SOUTH $\frac{1}{4}$ 36

MAY 1871 ORIG GOVT SURVEY G.R. STUNTZ

BLACK PINE 8" N79°E 451KS

BLACK PINE 7" N86°W 1131KS

1937 GLO RESURVEY PG #4

NO ORIG EVIDENCE FOUND. SET 3' X 2" 26"

IN THE GROUND WITH BRASS CAP MKD: $\frac{SC}{4536}$
1937R. PINE 10" S40 $\frac{3}{4}$ W 1051KS 69.3 FT
NOW 20" DIA STUMP BT VISIBLE3-18-08 R MAIN J. SCHOONOVER C. GEIGER
Fd IRON IN PLACE IN ALDER BLACK SPRUCE
SWAMP. CORNER OFF NORTH EAST CORNER
OF ASPEN ISLAND. PLACE 8 FT STEEL SIGN
POST ALONG NORTH EDGE OF IRON. MARK
NEW BT. GPS IRON

TAMARACK 4" N13°W 456 FT TO NAIL

42

STANDARD CORNER SECTION 35 36

MAY 1871 ORIG GOUT SURVEY GR. STUNTZ

TAMARACK 5" S33E 1091KS

ASPEN 6" N89½W 4981KS

1937 GLO RESURVEY Pg 4 & 5

FD ONE ORIG BT TAM SNAG 6" DBH @ BRG AND
DIST. SET CONCRETE MONUMENT 2' X 6" 18"

IN THE GROUND / W/ 3½ INCH BRASS CAP

MKD: SC
T45N | R21W
535 | 536

1937J. PINE 6" ~~N22½E~~
N22½E 741KS 48.84'

J. PINE 6" N43°W 831KS 54.78'

43

STANDARD CORNER SECTION 36 | 31

MAY 1871 ORIG GOUT SURVEY G.R. STUNTZ

SET TOWN CORNER

BL PINE 7" N36W 2351KS

BL PINE 5" N89W 6191KS

1937 GLO RESURVEY Pg #3

FD REMAINS OF ORIG BTs. SET 2'x6" CONCRETE
MONUMENT 20" IN THE GROUND /N/ 3½ INCH BRASS

CAP MKD:

SC
T145N
R27W R26W
536 531
1937

ORIG J. PINE SNAG 8" N34W 2351KS 155.1'

ORIG J. PINE STP N89W 6191KS 408.54'

R PINE 7" N27½E 1891KS 124.74'

J PINE 6" N19¾W 1501KS 99.0'

3-18-08 R. MAIN J. SCHOONOVER

FD 1937 J. PINE BT DEAD SNAG WITH OLD TAG.
COULD NOT LOCATE MONUMENT MUST BE
FROZEN UNDER BOG

44 CONT FROM BK 1 P 68

SECTION CORNER 25-26-35-36

8-11-2011 R. MAIN

GPS IRON. 19" J PINE HAS BEEN CUT
OFF WAIST HIGH. ALL OTHER 1996 LIVE
BTS ARE STILL GOOD.

45

Remainder of
Book -

Blank
Pages