

T 147 N
R 25 W
5th P. M.

FIELD BOOK

1920

Book 3

T 147 N R 25 W

• Think Metric: SI, SI!

• Remember:

1 foot (Industrial/industrial) = 0.3048 m


1 U.S. Survey foot = 0.30480061 m approx.

ACSM BULLETIN, August 1977 23

BOOK#3

Region _____ Forest _____

SEE 148-25

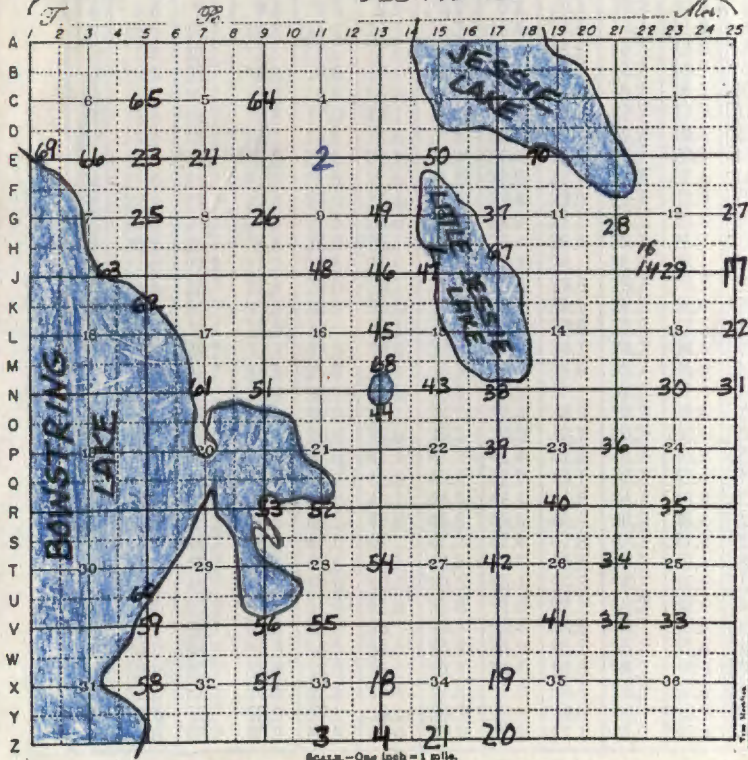

DISTRICT RANGER
U. S. Forest Service
P. O. Box 308
Deer River, MN 56636

(Area Code 218) 246-2123



The paper in this book is
made of 50% high grade rag stock with
a WATER RESISTING surface sizing.

KEUFFEL & ESSER CO.

INDEX

description	page
Traverse E 1/2 SW 1/4	8-12, 14, 16
Spur trav to S 1/4 11 & 12	6
Inverse & monumentation info for SMC So. Shore Jessie Lake	Pg 16
Inverse & monumentation info for W 1/4 Sec 12 & 13	Pg 14

A
B
C
D
E
F
G
H
J
K
L
M
N
O
P
Q
R
S
T
U
V
W
X
Y
Z

2

E-11

T147N R25W 5th P.M.

1/4 Corner Common to
Sections 4 and 9

Dec 1875 B.C. Baldwin set post from
which:

N. Pine 12 inch S10°E 33 lbs 21.78 ft

N. Pine 6 inch N42°W 29 lbs 19.14 ft

2-27-40 Arthur Johnson, CCC Squad Foreman,
found a new 3 inch X 40 inch scribed
post, scribed "1/4 54" & "1/4 59" witnessed
by:

J. Pine 4 inch S20°E 21 lbs 13.86 ft
scribed "1/4 59" & "RT"

J. Pine 4 inch N44°W 81 lbs 53.46 ft
scribed "1/4 54" & "RT"

874 station corner was set by J. A.
Ghelhaug (I have been unable to locate
any record of this survey in USFS
Records (123)).

11-3
2
CERTIFICATE FILED

Z-11

3

QUARTER CORNER SECTION 4-33

ORIG GOVT SURVEY
SET WOOD POST

BALSAM 12" N7W 28 LKS

BIRCH 6" S3W 14 LKS

SEPT 1920 BOWSTRING TOWN ROAD SURVEY B.C. CRAIG

CEDAR STP 16" N70°W 37.3 FT

PINE STP 36" N80°E 76.8 FT

7-27-94 R. MAIN C. KRAUSE

NO EVIDENCE FOUND FROM PREVIOUS
SURVEYS. GPS ROAD INTERSECTION.

3

ORIG. GOVT. SURVEY 1875

BIRCH 7 S64E 12 LKS. = 7.92'

SPRUCE 9 N65W 23 LKS. = 15.18'

5

QUARTER CORNER 33-34

ORIGINAL GOUT SURVEY

SET WITNESS CORNER ON BANK OF STREAM

ASH 6" N3°E 13.7

5

6

T147N R25W

Spur trav to set the S V_h 11-12STA 1st H&D 2nd H&R 3rd H&D 4th H&R

H&R

Dist 65 to 27 89-93-00 270-16-00 596.42

FS 6501 181-31-13 ⁸⁶² 63-02-15 184-33-40 ⁷⁶⁵ 06-01-15

BS 27 00-00-00 181-31-13 63-02-15 184-33-40

T@ 65 181-31-13 181-31-02 181-31-25 181-31-05

181-31-11

90-25-00

Dist 65 to 6501 90-25-00 289-35-00 698.97 698.95

Dist 6501 to 65 89-37-00 270-22-00 698.96 698.95
89-37-30

FS 6502 178-55-57 357-52-01 176-47-55 355-43-59

BS 65 00-00-00 178-55-57 357-52-01 176-47-55

T@ 6501 178-55-57 178-56-04 178-55-59 178-56-04

178-56-00

90-09-00

Dist 6501 to 6502 90-09-00 289-51-00 668.33 668.33

Dist 6502 to 6501

4545

June 22, 1993

6

Clear, calm, hot

PG to G. Kosenko

TTT B. Ausk

Acks D. Harmon

G. Robertson


T@ 65 S/N 158816

Red 1 SKJ

BAR = 29.9 Temp = 90°F

ELFF 42

698.95


Double
ASL

STA 6501 = Godspike


668.33

STA 6502 = Aspen hub in
open bog

7

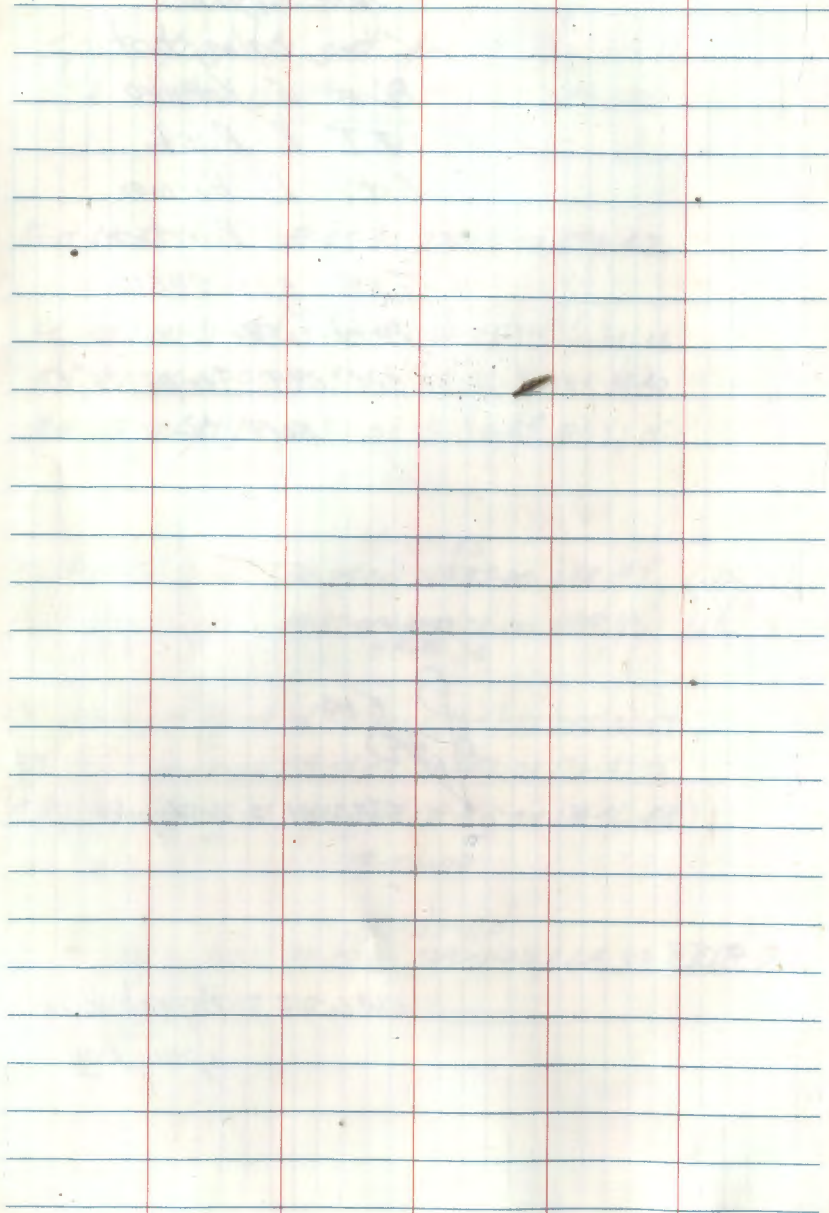

7

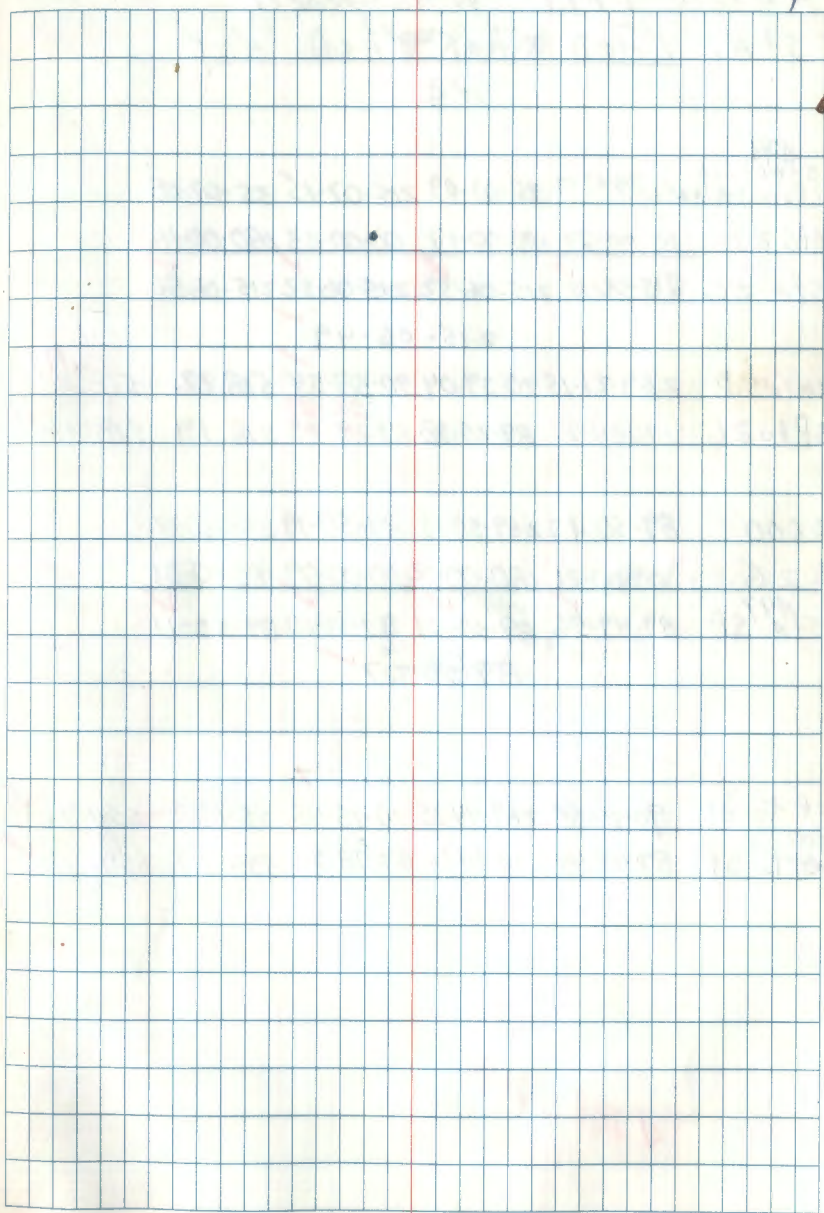

B TRAVERSE for SMC South Side

JESSIE LAKE W^{1/2} N^{1/2} North

STA. 1st H&D 2nd H&R 3rd H&D H&R

H&R

499
STARTING POINT 40' N^{1/2} W^{1/2} 215-07-09 35-07-09 215-07-15 35-07-08

BS 27 00-00-29 180-00-17 00-00-23 180-00-16

STA 26 215-06-40 215-06-52 215-06-52 215-06-52

215-06-49

26 to S.P. 269-21-15 90-39-04 90-38-54 518.22 518.21

SP to 26 270-34-40 89-25-38 89-29-25 518.19 518.16

FS 500 89-50-17 269-50-13 89-50-19 269-50-12

BS 26 00-00-21 180-00-02 00-00-09 180-00-01

499
STA S.P. 89-49-56 89-50-11 89-50-10 89-50-11

89-50-07

SP to 500 90-15-55 269-44-25 90-15-45 554.77 554.76

500
SP to SP 89-48-44 270-14-12 89-48-31 554.77 554.77

JAR 5-21-84

B-31-83 PCB. AUSK 8
G. Robertson

Wild T-2

Leitz Red 1A

518.17

4485' 68 d spike
S. Sign Public Water Access

554.77

FS 501 180-00-37 00-00-35 180-00-42 00-00-30
 BS SP 00-00-25 180-00-21 00-00-29 180-00-24
 T@ 500 180-00-12 180-00-14 180-00-13 180-00-02
 SF 180-00-12

FS Dist 501 90-02-05 269-58-12 90-01-57 818.26 818.26
 PS Dist 501 90-00-47 269-59-17 90-00-45 818.26 818.26

FS 502 180-00-20 00-00-13 180-00-24 00-00-20

BS 500 00-00-16 180-00-07 00-00-16 180-00-11

T@ 501 180-00-04 180-00-06 180-00-08 180-00-09
 SF 180-00-07

501-502 90-31-10 269-29-08 90-31-01 1121.77 1121.72

502-501 89-30-47 270-28-57 89-30-55 1121.76 1121.72

✓ JBR 5-21-84

STA 500 = bad spike

818.26 ✓

STA 501 = bad spike

1121.72 ✓

Cont. from Page 9

10 T147N R25W Sec 12 - S. Division

FS 503 359-57-46 179-57-36 359-57-39 179-57-44

BS 501 00-00-13 180-00-09 00-00-14 180-00-10

TP 502 359-57-33 359-57-27 359-57-25 359-57-34

359-57-30

502-503 89-29-58 270-29-51 373-30-03 873.12 873.09

503-502 90-32-40 269-27-39 90-32-31 873.27 873.23

FS 504 180-21-14 180-20-21 180-21-14 00-21-05

BS 502 00-20-28 10-21-08 00-20-29 180-20-23

TP 503 180-20-46 180-20-47 180-20-47 180-20-42

180-20-46

503-504 90-08-41 269-51-31 90-08-35 361.88 361.88

504-503 89-57-54 270-02-15 89-57-50 361.90 361.90

✓ JHR 5/20/04

9/1/83

Wild + Leitz Redia

PC Robertson
B. Ausk Brush mover
G. Kosenko Aid

STA 502 = God spike
near SMC

873.16

God spike (in middle of
driveway)

361.89

360
1/2
539

Cont'd from pg 10.

T147N R25W Sec 12 Sub

Traverse cont'd from pg 10

STA 1st H&R 2nd H&R 3rd H&R 4th H&R

H&R

FS 5505 179-41-39 359-41-30 179-41-39 359-41-31

BS 503 ~~00-00-22~~ 180-00-08 ~~00-00-18~~ 180-00-10

T@ 504 179-41-17 179-41-22 179-41-21 179-41-21

179-41-20

Dist 504-505 ⁴⁵⁻⁴⁹ 89-52-46 270-14-22 89-45-44 1272.62 1272.61

Dist 505-504 90-16-23 269-43-45 90-16-19 1272.60 1272.59

FS 26 271-37-08 ²⁵ 91-36-56 271-36-59 91-36-51

BS 504 ~~00-00-22~~ 180-00-12 ~~80-00-15~~ 180-00-08

T@ 505 271-36-43 271-36-44 271-36-44 271-36-43

505-26 89-29-16 270-30-48 89-29-14 517.26 517.24

26-505 90-35-11 269-42-06 90-26-33 517.26 517.24

1 H&R 5/21/84

9/1/83

STA 504 = 16d no. 1

1272.60

STA 505 = 16d no. 1

517.24

T147N R25W Sec 12 Sub

cont'd from Pg 11

STA 1st H&O 2nd H&R 3rd H&O 4th H&RFS 27 143-²⁶⁻⁴⁶~~46-26~~ 323-26-43 143-26-49 323-26-44

BS 505 00-00-15 180-00-13 00-00-13 180-00-10

T@ 26 143-26-31 143-26-30 143-26-36 143-26-34

143-26-33

Dist

Dist

✓ HAR 5/21/84

9/1/83

J-22

T147 N R25W

Inverse & monumentation info to set STA 5059

W 1/6 Sec. 12 & 13


STA 1st H & D 2nd H & R 3rd H & D 4th H & R C.H. Dist
H &

(FT)
M.H. Dist

FS 5059 179-54-05 359-53-57 39.98

BS ⁵⁰⁰ ~~504~~ 0-00-30 180-00-29 27.71

T @ ⁴⁹⁹ ~~505~~ 177-15-54 179-53-28



May 22, 1984 K. Whitehorn, B. Ausk, & G. Robertson

Set a 2 ft. long by 2 1/2 in. O.D. concrete filled galvanized iron pipe 1 in. below E State Trunk Highway #6. Monument is 20 ft. west of road intersection. Mon. is covered with cold patch.

BT's

W. Spruce, 12.1 in., N53°E, 110.19 ft. to a 16d nail in

Cedar, 9.8 in., S22°E, 66.00 ft. to a 16d nail in

Cedar, 7.3 in., S32°W, 52.06 ft. to 16d nail in the

All BT's have 60d spike in base of BT blaze,

Mon. has 3 in. dia. brass cap stamped as shown above

the SE face, double blazed, scribed "W 1/6 S 12 BT"

the SW face, double blazed, scribed "W 1/6 S 13 BT"

NW face, double blazed, scribed "W 1/6 S 13 BT"


BT tags, + painted red with red ring

T147N R25W

GH-22

Inverse & monumentation info. to set STA 5029
So. M.C. Sec. 12 on So shore Jessie Lake.

We took a compass shot from STA 502 of $S 84^{\circ} 2' E$
and measured 0.20 ft.



$5^{\circ} E$ decl.

May 21, 1984 B. Ausk & G. Robertson.

Set a 11 ft. by 5/8 in. aluminum rod
with a 3 1/4 in. aluminum cap stamped as
shown above. Up 18 inches. From which bears:

Ash 6.6 in. $S 40^{\circ} E$ 53.46 ft. to a 16d nail

Ash 9.6 in. $S 05^{\circ} E$ 79.80 ft. to a 16d nail

8 ft. metal sign post, South, 3.0 ft, w/ $54.2 = 54.9$

All BT's have BT tags and 60d spikes in

All BT's are painted red with a red ring

53.46

16

in the SW face, double blazed scribed "S12SMC BT"

in the W face, double blazed scribed "S12SMC BT"

the base of the BT blaze

(17)

J-25

Southeast Corner of Section
12, T147N, R25W of 5th P.M.

7-17-84 K. Whitehorn & C. Hontari
Recovered Co. IP with cap
broken off, IP Bent.

J. Pine 13.5 in S78°W 50.70 ft to 16d

~~N. Pine~~ nail in SE face

N. Pine ~~14.2 in~~
13.5 in N46°W 28.50 ft to 16d

a nail in SW face

both trees double blazed with
scribe marks visible.

did not fix up corner or put
up any tags

CERTIFICATE FILED

(17)

QUARTER CORNER BET. SEC'S. 33 & 34

NOTES OF ORIG. GOV'T. SURVEY 1875

SET POST FOR WITNESS CORNER

① 39.75 CHS. OR 2623.5' NORTH OF SEC. COR.

ASH 6 N3E 13.70 CHS. = 904.2'

M21

Township No. 147. N.

		North. between Sec
		33. & 34
		Var. 14°
1452'	22.00	Enter Swamp N. 72
2178'	33.00	" Marsh "
2508'	38.00	Stream 50. lks N. 72
2623.5	39.75	Set. Post cor. on bank
		of Stream 50. lks from N. 72
		Cash. 6. N. 3. E. 13.70
2871'	43.50	Stream 50. lks N. 72
3465'	52.50	Leave marsh. "
4851'	73.50	Enter Jam. & bed. swamps
80.00		Set post. cor. to Sec.
		27. 28. 33. & 34
		Jam. 6. N. 13. 72. 68
		" 7. N. 3. E. 62
		bed 8. N. 6. 72. 24
		* Jam. 7. N. 23. E. 11

QUARTER CORNER BET. SEC'S. 34 & 35

● NOTES OF ORIG. GOV'T. SURVEY 1875

SET WOOD POST

SPRUCE 3 N28W 19 LKS. = 12.54'

SPRUCE 3 S81E 9 LKS. = 5.94'

CORNER TO SECTIONS 2-3-34+35
 NOTES OF ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

TAM. 3 N33E 33 LKS = 21.78'

TAM. 4 N53W 59 LKS = 38.94'

TAM. 5 S18E 75 LKS = 49.50'

TAM. 3 S65W 90 LKS = 59.40'

QUARTER CORNER BET. SEC'S. 3 & 34
NOTES OF ORIG. GOV'T. SURVEY 1875
SET WOOD POST

BALSAM 4 S24W 15 LKS. = 9.90'

~~SICH~~ BIRCH 6 N43E 15 LKS. = 9.90'

STANDARD EAST QUARTER SECTION 13
 ORIG. GOVT. SURVEY 1867
 SET WOOD POST

TAM. 6 N45W 114 Lks. = 75.24'

FIR 8 S12W 44 Lks. = 29.04'

CERTIFICATE FILED

CORNER TO SECTIONS 5-6-7-8

ORIG. GOV'T. SURVEY 1875

SET WOOD POST

N. PINE 24 NB7E 34 LKS. = 22.44'

N. PINE 24 N23W 38 LKS. = 25.08'

BIRCH 14 S70E 12 LKS. = 7.92'

BALSAM 5 S66W 15 LKS. = 9.90'

QUARTER CORNER BET. SECS. 5+8
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

CEDAR 6 N6E 5 LKS. = 3.30'

TAM. 14 S24W 22 LKS. = 14.52'

QUARTER CORNER BET. SEC'S, 7+8

ORIG. GOV'T. SURVEY 1875

SET WOOD POST

SUGAR 12 N35E 7 LKS. = 4.62'

BIRCH 14 N55W 16 LKS. = 10.56'

QUARTER CORNER BET. SEC'S. 8+9
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

TAM, 9 S59E 11 LKS. = 7.26'

SPRUCE 6 N84W 14 LKS. = 9.24'

EAST QUARTER CORNER TO SECTION 12

ORIG. GOV'T. SURVEY 1875

SET WOOD POST

Y. PINE 6. N50W 25 LKS. = 16.50'

Y. PINE 12 S30W 30 LKS. = 19.80'

MEANDER CORNER BET SEC'S. 11412

ORIG. GOV'T. SURVEY 1875

SET WOOD POST

NO BT'S, - IN OPEN BOG

CERTIFICATE FILED

QUARTER CORNER BET. SEC'S. 12+13

ORIG. GOVT. SURVEY 1875

SET WOOD POST

N. PINE 20 S48W 160 LK_s = 105.60'

CERTIFICATE FILED
 QUARTER CORNER BET. SEC'S. 13+24
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

SPRUCE 8 N3W 24 LKS. = 15.84'

SPRUCE 8 S29W 24 LKS. = 15.84'

STANDARD CORNER TO SEC'S, 13+24

ORIG. GOV'T. SURVEY 1867

SET WOOD POST

BIRCH 8 N57W 25 LKS = 16.50'

ELM 12 S35W 50 LKS = 33.00'

CERTIFICATE FILED

CORNER TO SECTIONS 25-26-35+36
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

TAM. 5 N52E 29 LKS = 19.14'

SPRUCE 4 S41E 46 LKS = 30.36'

TAM. 4 S75W 21 LKS = 13.86'

TAM. 5 N79W 26 LKS = 17.16'

QUARTER CORNER OF SEC 25-26-35+36
 COR. GOV'T. SURVEY 1875
 SET WOOD POST

SPRUCE 4 S41E 46 LKS = 30.36'

TAM. 4 S75W 21 LKS = 13.86'

QUARTER CORNER BET SEC'S, 25+36
 ORIG. GOVT. SURVEY 1875
 SET WOOD POST

SPRUCE 4 N30E 9 LKS. = 5.94'

SPRUCE 3 S58W 16 LKS. = 10.56'

QUARTER CORNER BET. SEC'S. 25+26
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

BIRCH 4 S57W 13 LKS = 8.58'

BIRCH 7 N70E 29 LKS = 19.14'

QUARTER CORNER BET. SEC'S. 25+26
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

BIRCH 4 S57W 13 LKS = 8.58'

BIRCH 7 N70E 29 LKS = 19.14'

QUARTER CORNER BET. SEC'S. 24 & 25
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

SPRUCE 4 N30E 18 LKS. = 11.88'

SPRUCE 2 1/2 S21W 8 LKS. = 5.28'

874 C&G NOTES BY LARSON 4-2-35

NO POST

SPRUCE 4 N33E 14 LKS. = 9.24'

SCRIBED 1/4 S BT - (FSLP)

SPRUCE 3 S9W 9 LKS. = 5.94'

SCRIBED 1/4 S BT

QUARTER CORNER BET. SEC'S. 23 & 24
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

ASPEN 3 N84W 55 LKS. = 36.30'

ASPEN 3 S76E 53 LKS. = 34.98'

QUARTER CORNER BET. SEC'S. 23 & 24
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

ASPEN 3 N84W 55 LKS. = 36.30'

ASPEN 3 S76E 53 LKS. = 34.98'

QUARTER CORNER BET. SEC'S. 10+11
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

SUGAR 8 N68E 26 LKS. = 17.16'

BIRCH 8 N40W 8 LKS. = 5.28'

ES+SS 21441 21442 21443 21444
 21445 21446 21447 21448
 21449 21450 21451 21452

21453 21454 21455 21456

21457 21458 21459 21460

21461 21462 21463 21464

21465 21466 21467 21468

CORNER TO SECTIONS 14-15-22+23
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

ASPEN 3 S82W 28 LKS = 18.48'

ASPEN 3 N69W 30 LKS = 19.80'

ASPEN 3 S29E 79 LKS = 52.14'

ASPEN 3 N18E 101 LKS = 66.66'

QUARTER CORNER BET. SEC'S, 22+23
 ORIG. GOVT. SURVEY 1875
 SET WOOD POST

TAM. 5 NZOW 25 LKS. = 16.50'

TAM. 5 S60E 29 LKS. = 19.14'

~~QUARTER CORNER BET. SEC'S, 22+23
 ORIG. GOVT. SURVEY 1875
 SET WOOD POST~~

~~TAM. 5 NZOW 25 LKS. = 16.50'~~

~~TAM. 5 S60E 29 LKS. = 19.14'~~

QUARTER CORNER BET. SEC'S. 23+26
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

CEDAR 12 S47W 7 LKS. = 4.62'

CEDAR 6 N38E 13 LKS. = 8.58'

QUARTER CORNER BET. SEC'S. 23+26

ORIG. GOV'T. SURVEY 1875

SET WOOD POST

CEDAR 12 S47W 7 LKS. = 4.62'

CEDAR 6 N38E 13 LKS. = 8.58'

QUARTER CORNER BET. SECS. 26+35
 ORIG. GOVT. SURVEY 1875
 SET WOOD POST

SPRUCE 3 S23E 23 LKS = 15.18'

SPRUCE 3 N22W 13 LKS = 8.58'

QUARTER CORNER BET. SECS. 26+35
 ORIG. GOVT. SURVEY 1875
 SET WOOD POST

SPRUCE 3 S23E 23 LKS = 15.18'

SPRUCE 3 N22W 13 LKS = 8.58'

QUARTER CORNER BET. SEC'S. 26+27
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

BIRCH 3 S42E 18 LKS. = 11.88'

BIRCH 3 S86W 38 LKS. = 25.08'

QUARTER CORNER BET. SEC'S. 26+27

ORIG. GOV'T. SURVEY 1875

SET WOOD POST

BIRCH 3 S42E 18 LKS. = 11.88'

BIRCH 3 S86W 38 LKS. = 25.08'

QUARTER CORNER BET. SEC'S. 15 & 22
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

ASPEN 5 S70E 17 LKS. = 11.22'

ASPEN 6 N40W 19 LKS. = 12.54'

1875, 22 SEC. 15 & 22
 17 & 19 LKS. = 11.22' & 12.54'
 SET WOOD POST

ASPEN 5 S70E 17 LKS. = 11.22'
 ASPEN 6 N40W 19 LKS. = 12.54'

44
MEANDER CORNER BET. SEC'S. 21+22
CORNER TO SECTIONS 15-16-21+22
ORIG. GOV'T. SURVEY 1875
SET WOOD POST

ASH 8 S45E 163 LKS. = 107.58'

ASH 4 S11E 178 LKS. = 117.48'

CORNER TO SECTIONS 9-10-15+16
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

ASPEN 14 N6E 31 LKS = 20.46'

W. PINE 10 N73W 18 LKS = 11.88'

W. PINE 8 S14W 31 LKS = 20.46'

BIRCH 14 S79E 12 LKS = 7.92'

MEANDER CORNER BET. SEC'S. 10 & 15
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

ASPEN 6 S73W 70 LKS = 46.20'

BALMIE 4 N72W 68 LKS = 44.88'

QUARTER CORNER BET. SEC'S. 9+16
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

ASPEN 9 SSE 20 LKS. = 13.20'

ASPEN 6 N13E 23 LKS. = 15.18'

QUARTER CORNER BET. SEC'S. 9+10
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

BALSAM 7 WEST 15 LKS. = 9.90'

BIRCH 8 S59E 20 LKS. = 13.20'

QUARTER CORNER BET. SEC'S, 3+10
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

TAM. 12 S89W 94 LKS = 62.04'

TAM. 12 N29W 87 LKS = 57.42'

NUMBER TO BE SET BY THE SURVEYOR
 SET WOOD POST

1875 GOV'T. SURVEY 1875

1875 GOV'T. SURVEY 1875

1875 GOV'T. SURVEY 1875

1875 GOV'T. SURVEY 1875

CORNER TO SECTIONS 16-17-20+21
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

CEDAR 4 N43E 30 LKS = 19.80'

CEDAR 4 S38E 48 LKS = 31.68'

CEDAR 4 N22W 92 LKS = 60.72'

CEDAR 6 N $\frac{1}{2}$ W 830 LKS = 547.80'

SECTION 16-17-20+21

2731 43312 1000 3.50

1209 0000 000

1000 0000 1000 10 1000

1000 0000 1000 10 1000

QUARTER CORNER BET. SEC'S. 21+28
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

TAM 4 EAST 1500~~00~~ 990.0'

TAM 4 N88½E 1596~~43~~ 1053.36'

15-15 232 78 53400 9300000
 7813000 5100 5100
 1200 1000 732

QUARTER CORNER BET. SEC'S. 27+28
ORIG. GOV'T. SURVEY 1875
SET WOOD POST

TAM. 4 N48E 12 LKS = 7.92'

SPRUCE 5 S30W 20 LKS = 13.20'

CORNER TO SECTIONS 28-29+32+33
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

DEAD TAM, 4 SITE 6 LKS = 3.96'

DEAD TAM, 6 N69E 45 LKS = 29.70'


DEAD TAM, 3 S64W 30 LKS = 19.80'

TAM, 5 N24W 216 LKS = 142.56'

QUARTER CORNER, BET. SEC'S. 32+33
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

BALSAM 3 S10W 43 LKS = 28.38'

BALSAM 6 N3E 32 LKS = 21.12'

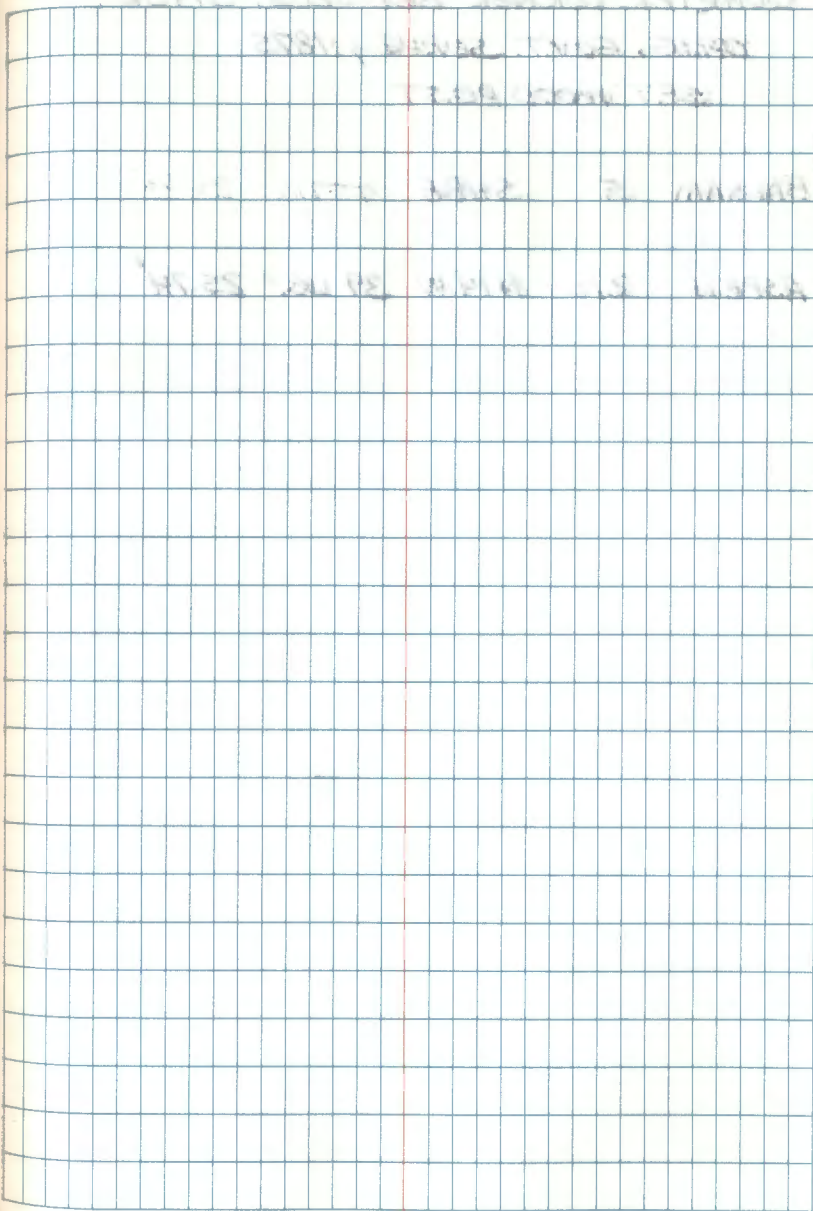

QUARTER CORNER BET. SEC'S, 31+32

• ORIG. GOVT. SURVEY 1875

SET WOOD POST

BALSAM 5 S48E —

ASPEN 2 1/2 N14W 39 LKS. = 25.74'

COORDINATES OF QUARTER CORNER

SECTION 31, T14N, R10E

SECTION 32, T14N, R10E

SECTION 31, T14N, R10E

SECTION 31, T14N, R10E

SECTION 31, T14N, R10E

SECTION 31, T14N, R10E

CORNER TO SECTIONS 29-30-31 & 32
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

TAM. 6 S75W 45 LKS = 29.70'

TAM. 4 N73W 35 LKS = 23.10'

TAM. 8 S86E 40 LKS = 26.40'

TAM. 8 N33E 40 LKS = 26.40'

ORIGINAL SURVEY 1875
 CORNER TO SECTIONS 29-30-31 & 32
 SET WOOD POST

TAM. 6 S75W 45 LKS = 29.70'

TAM. 4 N73W 35 LKS = 23.10'

TAM. 8 S86E 40 LKS = 26.40'

TAM. 8 N33E 40 LKS = 26.40'

MEANDER CORNER BET. SEC'S. 29+30

ORIG. GOV'T. SURVEY 1875

SET WOOD POST

TAM. 4 SIZE 290 LKS. = 191.40'

WILLOW 3 534 E 23 LKS. = 15.18'

MEANDER CORNER BET. SEC'S. 29+30

ORIG. GOV'T. SURVEY 1875

SET WOOD POST

TAM. 4 SIZE 290 LKS. = 191.40'

WILLOW 3 534 E 23 LKS. = 15.18'

61 MEANDER
~~QUARTER~~ CORNER BET. SEC'S. 17+20
ORIG. GOV'T. SURVEY 1875
SET WOOD POST

ASH 8 N3E 72 LKS = 47.52'

ASH 6 S84E 56 LKS = 36.96'

181

181

181

181

181

181

MEANDER CORNER, BET. SEC'S. 17 & 18

ORIG. GOV'T. SURVEY 1875

SET WOOD POST

BIRCH 12 N79E 37 LKS = 24.42'

CEDAR 14 S77E 70 LKS = 46.20'

MEANDER CORNER, BET. SEC'S. 17 & 18

ORIG. GOV'T. SURVEY 1875

SET WOOD POST

BIRCH 12 N79E 37 LKS = 24.42'

CEDAR 14 S77E 70 LKS = 46.20'

MEANDER CORNER, BET. SEC'S. 7+18
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

SUGAR 8 N52E 40 LKS = 26.40'

CEDAR 20 S75E 64 LKS = 42.24'

MEANDER CORNER, BET. SEC'S. 7+18
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

SUGAR 8 N52E 40 LKS = 26.40'

CEDAR 20 S75E 64 LKS = 42.24'

QUARTER CORNER BET. SEC'S. 4+5
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

ASPEN 12 N88W 70 LKS = 46.20'

ASPEN 14 S83E 36 LKS = 23.76'

QUARTER CORNER, BET. SEC'S, 5+6

ORIG. GOV'T. SURVEY 1875

SET WOOD POST

SUGAR 14 N63W 138 LK. = 91.08'

BIRCH 18 S4E 38 LK. = 25.08'

QUARTER CORNER BET. SEC'S 5+6
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

SUGAR 14 N63W 138 LK. = 91.08'

BIRCH 18 S4E 38 LK. = 25.08'

QUARTER CORNER BET. SEC'S, 6+7
 ORIG. GOVT. SURVEY 1875
 SET WOOD POST

SUGAR 14 N22W 108 LKS = 71.28'

BIRCH 12 S65E 29 LKS = 19.14'


Index No. E-3 ITANCA COUNTY LAND CORNER RECORD
 Location X 6 & 7 T. 147 R. 25 P.M. 5th
 Description N 1/2 P. 50⁺ N. E. road.
 Origin G.L.O. R.S. S.R. SUB. SET

Reference		Corner Perpetuation Record						
Set from information from Surveyors record, Survey of Nov. 1955 S. Bensing.		Date	Wit.	Size	Bearing	Dist.	Est./Date	Remarks
Set P.K. nail in new blacktop from 1979 wit. , I.P. is under surface.		6/27/79	Corner Mon.				8-20-84	5/25/89
1923 Folder #15 P.C. 500 Plat of CHA CHA BO		6/79	P. Pole		N15°W	32.22'		
1970 SR Twp 26, pg 23 of Mike Niles #22		6/79	G. Pole		S20°E	52.96'		
1875 GLO pg. 43		6/79	Elm	4"	N42°E	82.48'		dead
Sugar 14" N22W 108 lks.		8/84	X Gul. E. end.		S12E	41.39'		
Birch 12" S65E 29 lks.		8/84	X Rock	1 1/2 x 1 1/2	S30W	72.94'		Fl. sh.
1920 BORSTRING-BASS LAKE ROAD, SR. pg. 23		1989	Sugar Maple	4 1/2"	N35°W	*74.89'		
B.C. Craig.		1989	"	9"	S20°E	*77.36'		
Maple 8" N16W 88.8'		1989	Basewood	11"	N28°E	*82.80'		
Spruce 8" S12W 85.6'								
Found one govt 8T.								
1989 Field BK #1 Pg. 13								
*Distances are to 60d/washers								

MEANDER CORNER BET. SEC'S. 10 & 11
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

BALMIE 8 N16W 27 LKS. = 17.82'

BALMIE 10 NORTH 20 LKS. = 13.20'

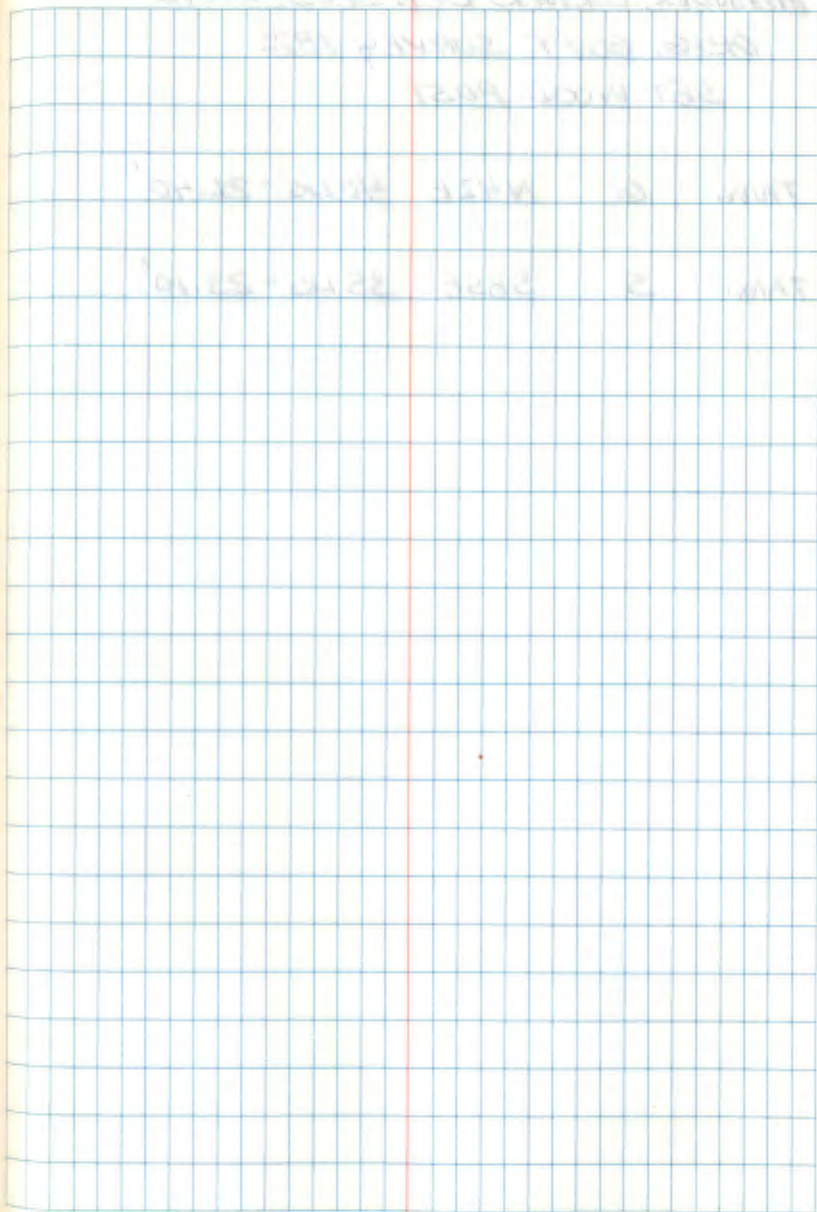

68

MEANDER CORNER BET. SEC'S. 15+16

ORIG. GOV'T. SURVEY 1875

SET WOOD POST

TAM. 6 N42E 40 LKS = 26.40'

TAM. 5 S85E 35 LKS = 23.10'

68

MEANDER CORNER BET. SEC'S. 6+7
 ORIG. GOV'T. SURVEY 1875
 SET WOOD POST

ELM 12 S61E 60 LKS = 39.60'

ELM 9 N61E 23 LKS = 15.18'

~~MEANDER~~ MEANDER CORNER BET. SEC'S. 2+11

ORIG. GOV'T. SURVEY 1875

SET WOOD POST

ELM 16 S23W 130 LKS = 85.80'

BIRCH 7 S8W 122 LKS = 80.52'

