


George Smith

16-140-30

SCNEIDER FILE

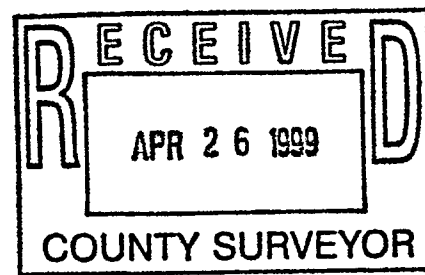

5918.49
5114.76
NW Cor 16

S 89-17-15 W 5293.77

2646.89

5984.30
10408.12
NE Cor 16 inf

File 495 = 589-18W 5296.71

46r
5951.39
7761.43

819.74
N1-02-24E

5164.69
10393.24

5278.98
50-53-35E

2640.97
Sec Cor to Sec Cor No-46-28W 5281.94

1/4 Cor for H-S ONLY
3254.27
5153.63

3298.98 cen 1/4
7802.80

46r 3343.57
10443.83

5290.95
589-01-58 W

2641.41

3350.16
10431.30

50-50-09E 5288.89

50-50-48E 3688.81

N1-12-06W 1814.95

1320.71

3321.27
1123.32

660.35
1320.70
3332.42
9783.58

660.35

1313.13

1316.81

N0-50-01W
2633.60

N0-48-12W 1318.65

19.974

1320.49
2666.45

2230.08
5169.27

50-50-48E 1318.34

1343.04
6753.50

1759.15
7760.66

1986.01
7823.26

2638.68
S 89-11-32 W


2004.60
9142.48

2013.89
7802.09

659.67

2023.20
10461.68

N0-46-28 W True
2640.97

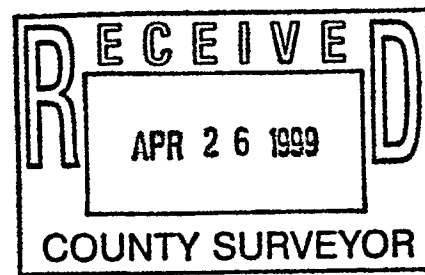

1421.21
6286.31

S 85-14-18 E 1010.65

1319.35

1662.44
8968.31

1319.33

1306.82

N 57-07-36 E

S 85-25-18 E 1211.52

S 85-25-18 E 1211.52

1316.79

S 48-30-54 E 1248.88

835.15
9903.89

601.99
575-40-54 E

Sec Cor
702.84
10479.53

911.89
5188.75
A

SW Cor 16
630.16
5191.93

1/4 Cor Impl
673.05
7843.73

N 89-04-24 E 2652.15

1317.99

N 89-21-08 E 2635.97

1317.98

686.28
B 10487.18

634.48
2610.86

S 89-54-15 E 2581.08

30

40

50

60

70

80

90

100