


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 10, Township 137 N, Range 32 W  
5TH Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,     lowered monument,     removed monument (explain)
- On 7/29/04 Placed a PK AT INTERSECTION OF CENTERLINE NORTH-SOUTH  
DATE STATE HIGHWAY & ROAD EAST

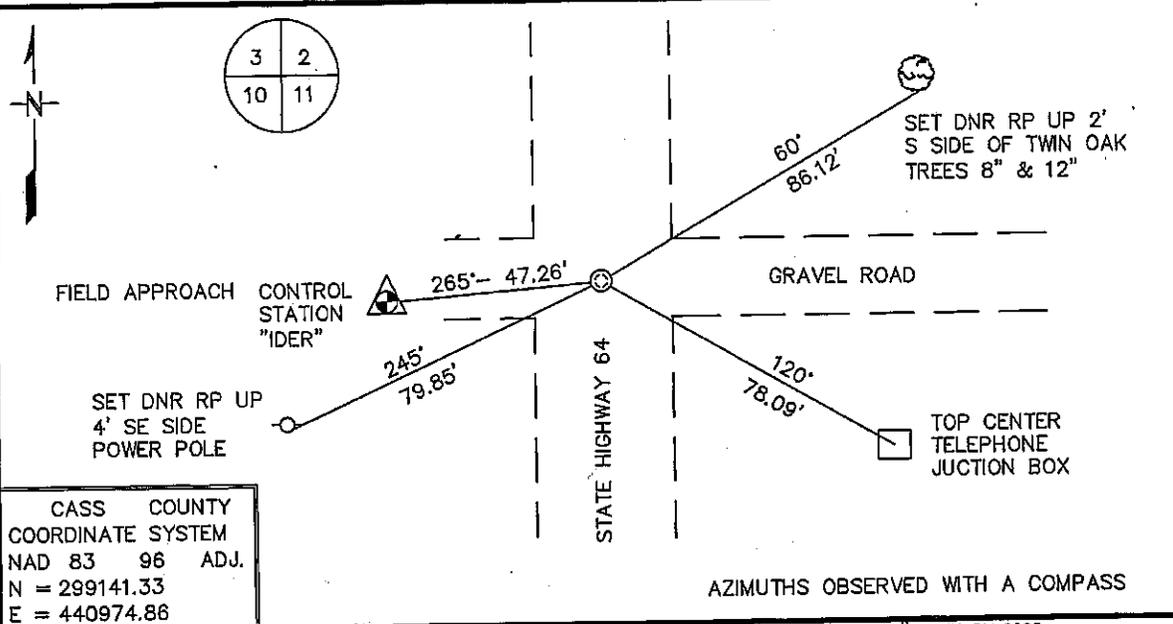

CASS COUNTY  
 COORDINATE SYSTEM  
 NAD 83 96 ADJ.  
 N = 299141.33  
 E = 440974.86

AZIMUTHS OBSERVED WITH A COMPASS

Statement of evidence for this corner location is on back of this page. JANUARY 2005  
SFT00019

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE \_\_\_\_\_ DATE \_\_\_\_\_ License Number 16098

Title:     Land Surveyor     Professional Engineer     County Surveyor     County Engineer

**Northeast Corner Section 10, Township 137 North, Range 32 West**

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

MN Secretary of State  
MN Department of Transportation  
Cass County Highway Department  
Cass County Surveyor  
Cass County Auditor  
Cass County Recorder

- 1870 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:
- Aspen 10" S 16° W 8 links (5.28')
  - Aspen 6" S 75° E 35 links (23.10')
  - Aspen 6" N 69 ½° E 32 links (21.12')
  - Aspen 12" N 82° W 1.33 chains (87.78')
- 1913 John Curo, Cass County Surveyor, in a resurvey of many sections in this township, found the southwest and northeast GLO bearing trees plainly marked from which he set a 2 ½" x 48" galvanized iron pipe capped on top and set nearly its full length.
- 1916 E.B. Horst, Cass County Surveyor's Office, in a resurvey of Ansel Township, searched for evidence of the corner and found no bearing trees. After digging up 25 feet of the State Highway he found an iron monument and the following ties were marked:
- White Pine 14" N 39°26' E 117.8' to tack (used as B.M.)
  - Blue Stone set nearly 4" square x 20" long S 45° E 46.67'
- 19?? MNDOT construction plan of State Highway 64 show a monument set at intersection of centerline State Highway 64 at centerline east-west roads. A distance of 2647.4' was listed to the East Quarter Corner of Section 10.
- 2003 In March, the DNR survey crew searched for evidence of the corner and found nothing. They located the intersection of centerline of State Highway 64 at centerline road east and fence west.
- 2004 In July, the DNR returned to the corner and set a PK nail at the previously located centerline intersection marking the obliterated position of the corner.

For more information on our survey in this area, please contact MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401