


Index No. E-21

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 11, Township 137 N, Range 32 W  
5TH Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 7/27/04 Placed a 3/4" IRON ROD WITH SURVEY CAP AT INTERSECTION OF  
DATE ROADS NORTH-SOUTH & WEST, 1' SOUTH OF ROAD EAST

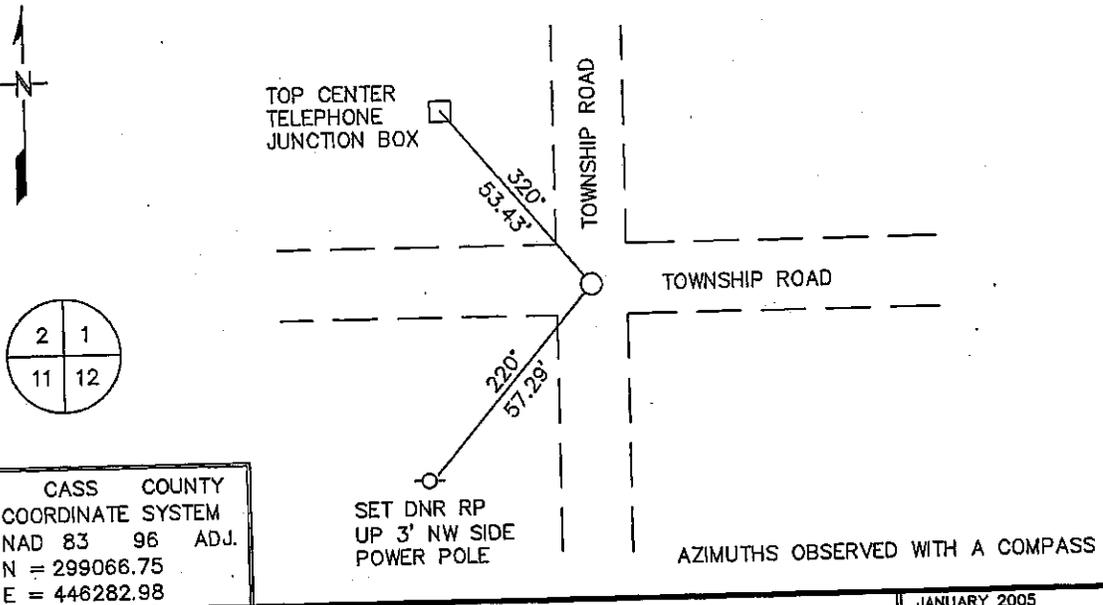

Statement of evidence for this corner location is on back of this page.

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE \_\_\_\_\_ DATE \_\_\_\_\_ License Number 16098  
Title:  Land Surveyor  Professional Engineer  County Surveyor  County Engineer

**Northeast Corner Section 11, Township 137 North, Range 32 West**

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

MN Secretary of State  
MN Department of Transportation  
Cass County Highway Department  
Cass County Surveyor  
Cass County Auditor  
Cass County Recorder

1870 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

Aspen 16" S 45° E 101 links (66.66')  
Aspen 11" S 28 ½° W 16 links (10.56')  
Aspen 10" N 30° W 28 links (18.48')  
Jack Pine 9" N 57° E 26 links (17.16')

1916 E.B. Horst, Cass County Survey Office, in a resurvey of Ansel Township, found the jack pine stump lying down and three poplar stumps from the GLO survey, then located the original point for corner. He measured 5307.7' to the NW corner Section 11. He set a new post for the corner and marked the following bearing trees:

Bur Oak 11" S 40° W 45.1'  
Elm 10" N 61° W 54.7'  
Poplar 5" N 26° 30' E 82.2'  
Poplar 9" S 38° E 77.3'

1917 E.B. Horst set a 2" x 48" iron monument for the location of the corner.

2002 In October, the DNR survey crew searched for evidence of the corner and found the intersection of centerline roads north-south and east-west. A DNR survey marker was set at the intersection of roads north-south and west, marking the obliterated position of the corner. This location is 1' south of the road east.

For more information on our survey in this area, please contact MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401