


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 15, Township 137 N, Range 32 W
5TH Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 7/29/04 Placed a 3/4" IRON ROD WITH SURVEY CAP IN CENTERLINE
DATE
EAST-WEST ROAD, 93' EAST OF CENTERLINE HWY 64

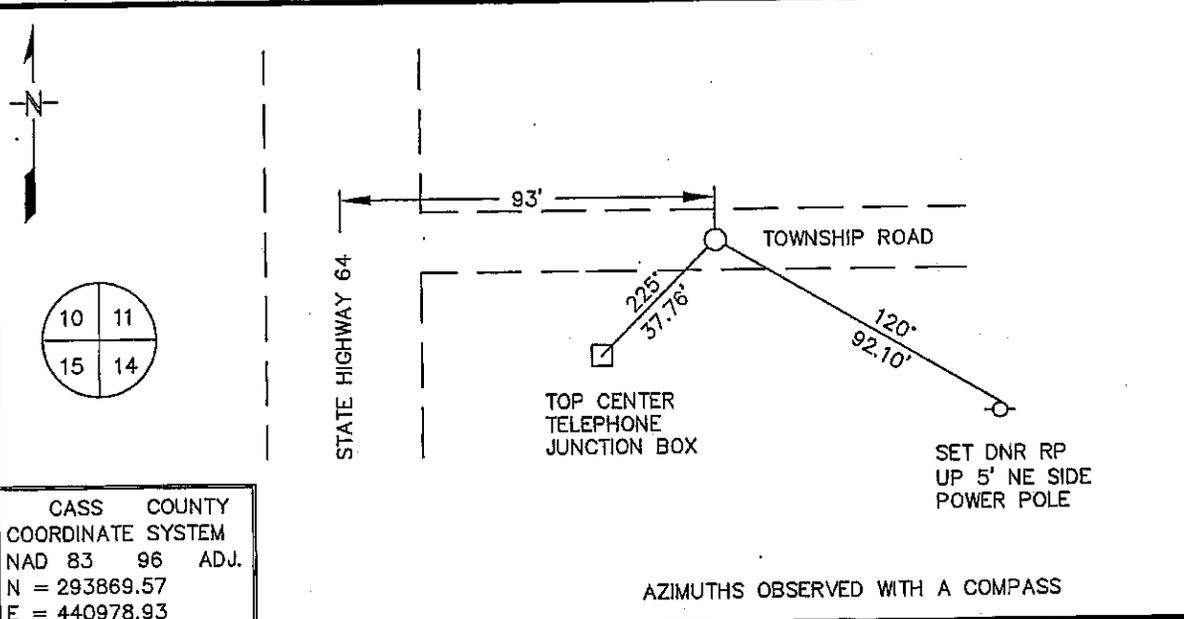

CASS COUNTY
 COORDINATE SYSTEM
 NAD 83 96 ADJ.
 N = 293869.57
 E = 440978.93

AZIMUTHS OBSERVED WITH A COMPASS

Statement of evidence for this corner location is on back of this page. JANUARY 2005
SFTD0019

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE _____ DATE _____ License Number 16098

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

Northeast Corner Section 15, Township 137 North, Range 32 West

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

MN Secretary of State
 MN Department of Transportation
 Cass County Highway Department
 Cass County Surveyor
 Cass County Auditor
 Cass County Recorder

- 1870 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:
- Dead Tamarack 10" S 58° E 36 links (23.76')
 - Dead Tamarack 10" S 74° W 50 links (33.00')
 - Black Ash 7" N 5° E 47 links (31.02')
 - White Birch 5" N 2 ½° W 53 links (34.98')
- 1916 E.B. Horst, Cass County Survey Office, in a resurvey of Ansel Township, searched for evidence of the corner and found nothing. He set the corner by double proportion. The location fell 93.1' east of the centerline of State Highway 64. A 4"x 4"x 4' wood post was set for the corner and ties were made as follows:
- Witness Post N 45° E 46.67'
 - Witness Stone N 45° W 46.67'
 - "X" mark on east of bridge S 83°15' W 81.9'
 - Witness Post S 45° E 46.67'
- 1917 E.B. Horst set an iron monument for the corner in the center of a judicial ditch and set a witness post north 13' and another witness post south 10'.
- 19?? MNDOT construction plan for State Highway 64 show the corner at intersection of State Highway 64 at centerline ditch west. Nothing is stated as being found or set for the location. A distance of 2634.6' is listed to the East Quarter Corner Section 15 and 2627.0' to the East Quarter Corner Section 10.
- 2002 In October, the DNR survey crew searched for evidence of the corner and found a metal attraction at intersection of centerline State Highway 64, road east, and centerline ditch west.
- 2004 The DNR returned to the corner and set a DNR survey marker in the centerline of an east-west road, 93' east of the centerline of State Highway 64 marking the obliterated position of the corner per the 1916 Horst survey.