


Index No. R-21

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 26, Township 137 N, Range 32 W  
5TH Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_
- left monument as found,  lowered monument,  removed monument (explain)
- On 10/26/04 Placed a 3/4" IRON ROD WITH SURVEY CAP 24' EAST OF  
DATE CENTERLINE NORTH-SOUTH TRAIL

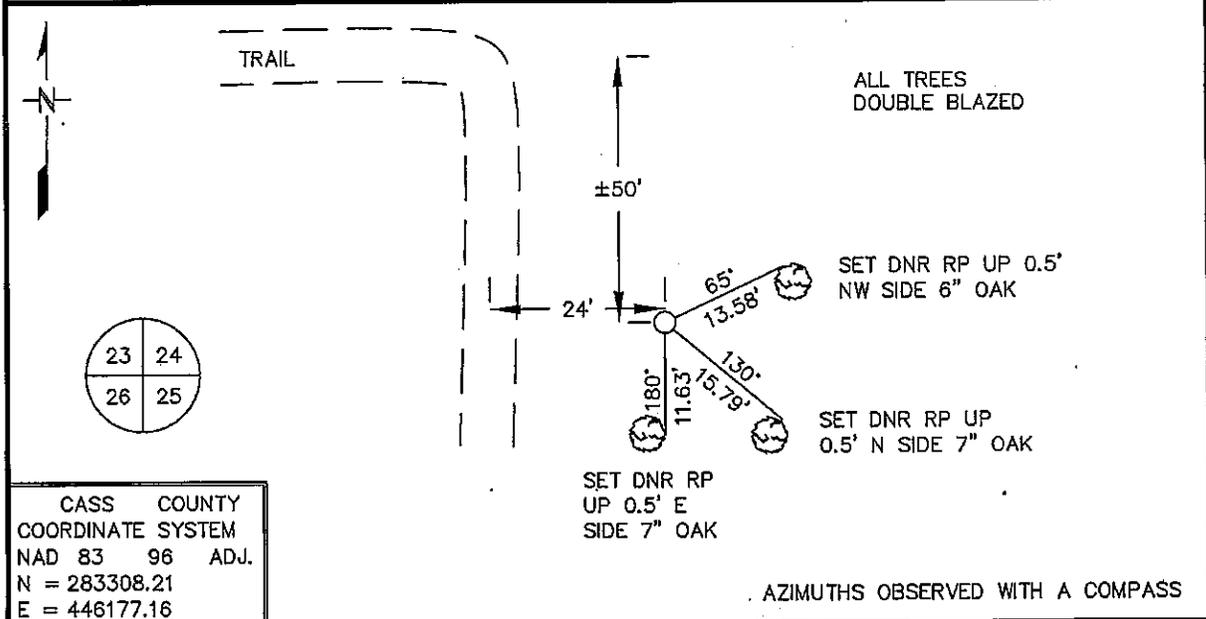

Statement of evidence for this corner location is on back of this page. JANUARY 2005 SFT00019

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE \_\_\_\_\_ DATE \_\_\_\_\_ License Number 16098

Title:  Land Surveyor  Professional Engineer  County Surveyor  County Engineer

**Northeast Corner Section 26, Township 137 North, Range 32 West**

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

MN Secretary of State  
MN Department of Transportation  
Cass County Highway Department  
Cass County Surveyor  
Cass County Auditor  
Cass County Recorder

1870 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

Aspen 10" N 10° W 2.25 chains (148.50')  
Aspen 12" S 19° E 21 links (13.86')  
Aspen 13" N 24° E 54 links (35.64')  
Norway Pine 10" S 54° W

1913 John Curo, Cass County Surveyor, in a resurvey of many sections in this township, found stumps of the GLO bearing trees from which he set a 3"x3"x24" oak hub for the corner and marked the following bearing trees:

Poplar 3" S 40° W 42.00'  
Poplar 4" S 30° E 42.00'

At a later date Curo pulled the oak hub and set a 2 ½" x 48" galvanized iron pipe capped on top and set nearly its full length in place of hub. New bearing trees were marked as follows:

Poplar 7" N 18°42' W 56.15'  
Poplar 4" S 17°15' W 42.00'

The following distances were measured:

2672.84' to the North Quarter Corner Section 26  
2680.3' to the North Quarter Corner Section 25  
10,551.14' to the Northeast Corner Section 14

1916 E.B. Horst, Cass County Survey Office, in a resurvey of Ansel Township, found the iron monument set by Curo.

2002 In October, the DNR survey crew searched for evidence of the corner and found nothing.

2004 The DNR returned to the corner and established it at a lost position.

For more information on our survey in this area, please contact MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401