


Index No. V-25

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 36, Township 137 N, Range 32 W  
5TH Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

- On 2/26/03 found a 2" GALVANIZED IRON PIPE UP 2.5' ON WEST FACING SLOPE  
DATE +/- 100' EAST OF SWAMP
- left monument as found,  lowered monument,  removed monument (explain)
- On \_\_\_\_\_ Placed a \_\_\_\_\_  
DATE \_\_\_\_\_

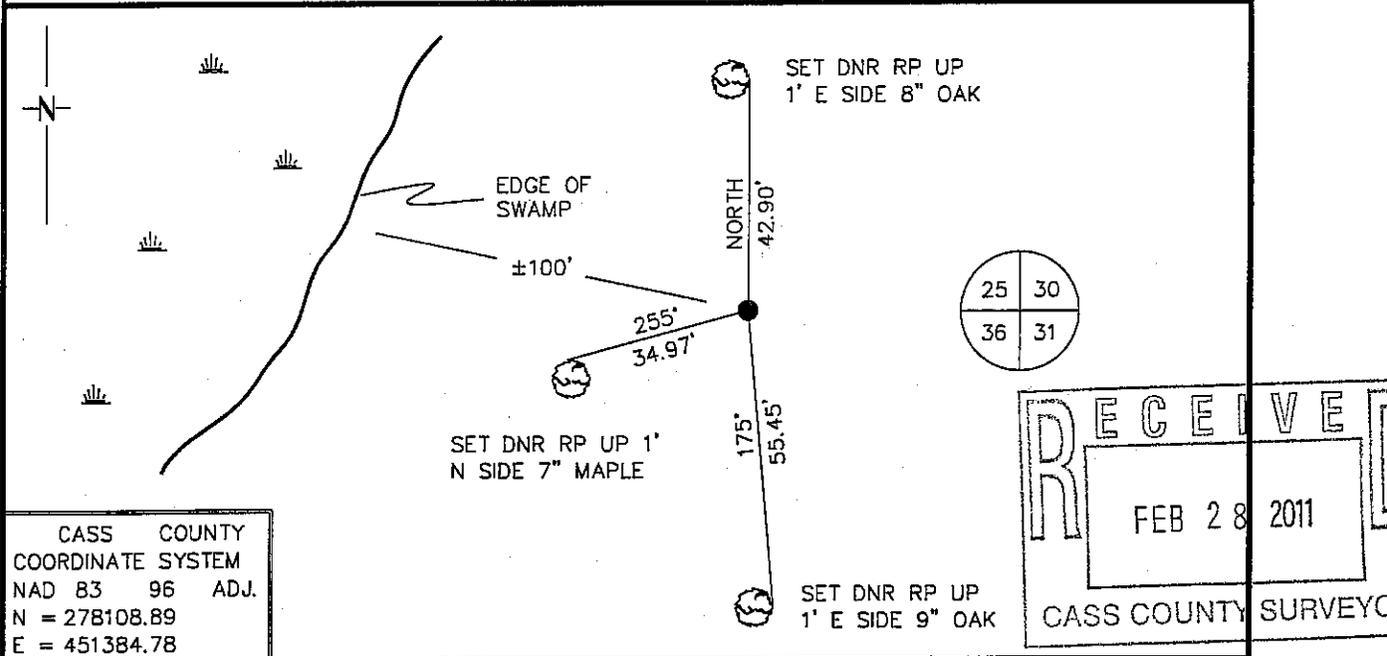

CASS COUNTY  
COORDINATE SYSTEM  
NAD 83 96 ADJ.  
N = 278108.89  
E = 451384.78

RECEIVED  
FEB 28 2011  
CASS COUNTY SURVEYOR

Statement of evidence for this corner location is on back of this page.

JANUARY 2005  
SFT00019

I certify that this document was researched and prepared by me or under my direct supervision.

SIGNATURE \_\_\_\_\_ DATE \_\_\_\_\_ License Number 16098

Title:  Land Surveyor  Professional Engineer  County Surveyor  County Engineer

**Northeast Corner Section 36, Township 137 North, Range 32 West**

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

MN Secretary of State  
MN Department of Transportation  
Cass County Highway Department  
Cass County Surveyor  
Cass County Auditor  
Cass County Recorder

1860 The US General Land Office field notes, on file in the Secretary of State's Office, show this corner to be marked with a post and the following bearing trees were marked:

White Birch 6" N 60° W 6 links (3.96')  
White Birch 6" S 48° W 22 links (14.52')  
White Birch 8" S 60° E 28 links (18.48')  
White Pine 18" N 32° E 20 links (13.20')

1913 John Curo, Cass County Surveyor, in a resurvey of many sections in this township, finds the stumps of the northeast and southeast GLO bearing trees and the burned stumps of the other two A 2 ½" x 48" galvanized iron pipe with cap was set nearly full length for the corner and the following bearing trees were marked:

Pine Stump 12" S 46° E 18.30'  
Pine Stub 18" N 68°50' E 16.65'

2002 In November, the DNR survey crew found a 2" galvanized pipe up 2.5' on west facing slope. The iron pipe was accepted as marking the true location for the corner and ties were made.

Northeast Corner Section 13 bears N 00°09'29" E 15720.65'

For more information on our survey in this area, please contact MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401

