

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


E 1/16 Corner of Section 4, Township 141, Range 28, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 6-3-82 placed a 2"x24" iron pipe with brass cap at the mid...
DATE point between the southeast corner and South quarter corner

SKETCH OF REFERENCE TIES

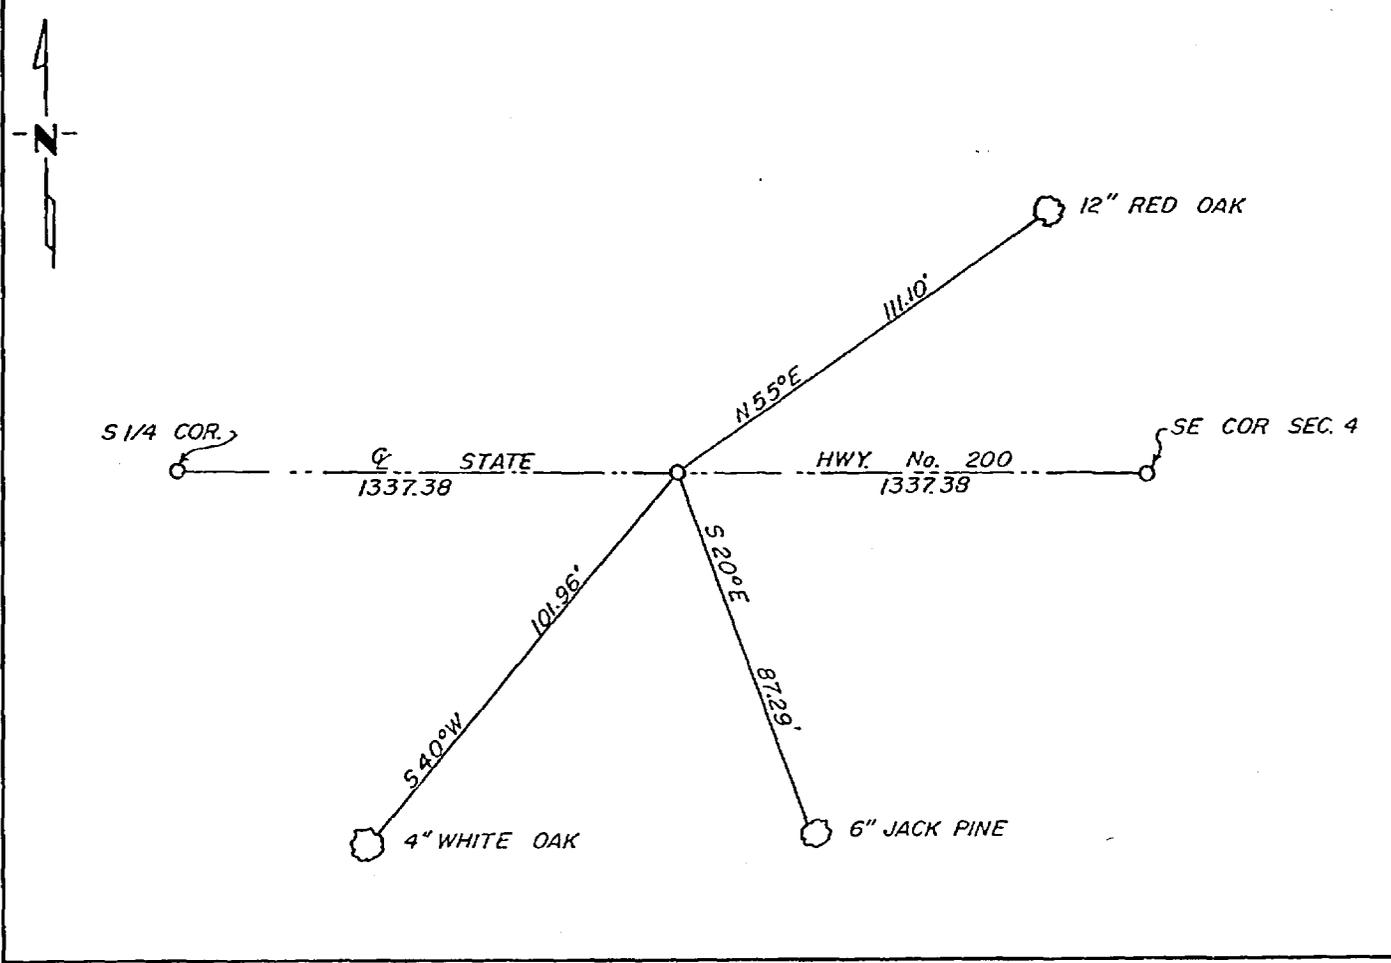

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lasso 6-7-82
SIGNATURE DATE

Registration No. 11395

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

263108

OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:30 A. M. on the 7 day of June A.D., 1982

Register of Deeds Beverly Handrich
By MS, Deputy

DOCUMENT NO. 263108

Statement of Evidence:

In 1918, Earl G. Harrington, a US surveyor set a 1"x36" iron pipe with brass cap for the E-1/16 corner from which he marked the following BTS. A 8" jackpine N 68-E-133 LKS and a 10" jackpine S-52½-W 178 LKS.

On 6-3-1982, Walter E. Curo, set a 2"x24" iron pipe with brass cap for the E-1/16, Sec.4 at the mid-point between the S-1/4 corner and the SE corner of the section. There is no trace of the original Bt's.