

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 25, Township 140N, Range 31W, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 12/10/81 found a Government Land Office Brass Disk (set 1946)
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

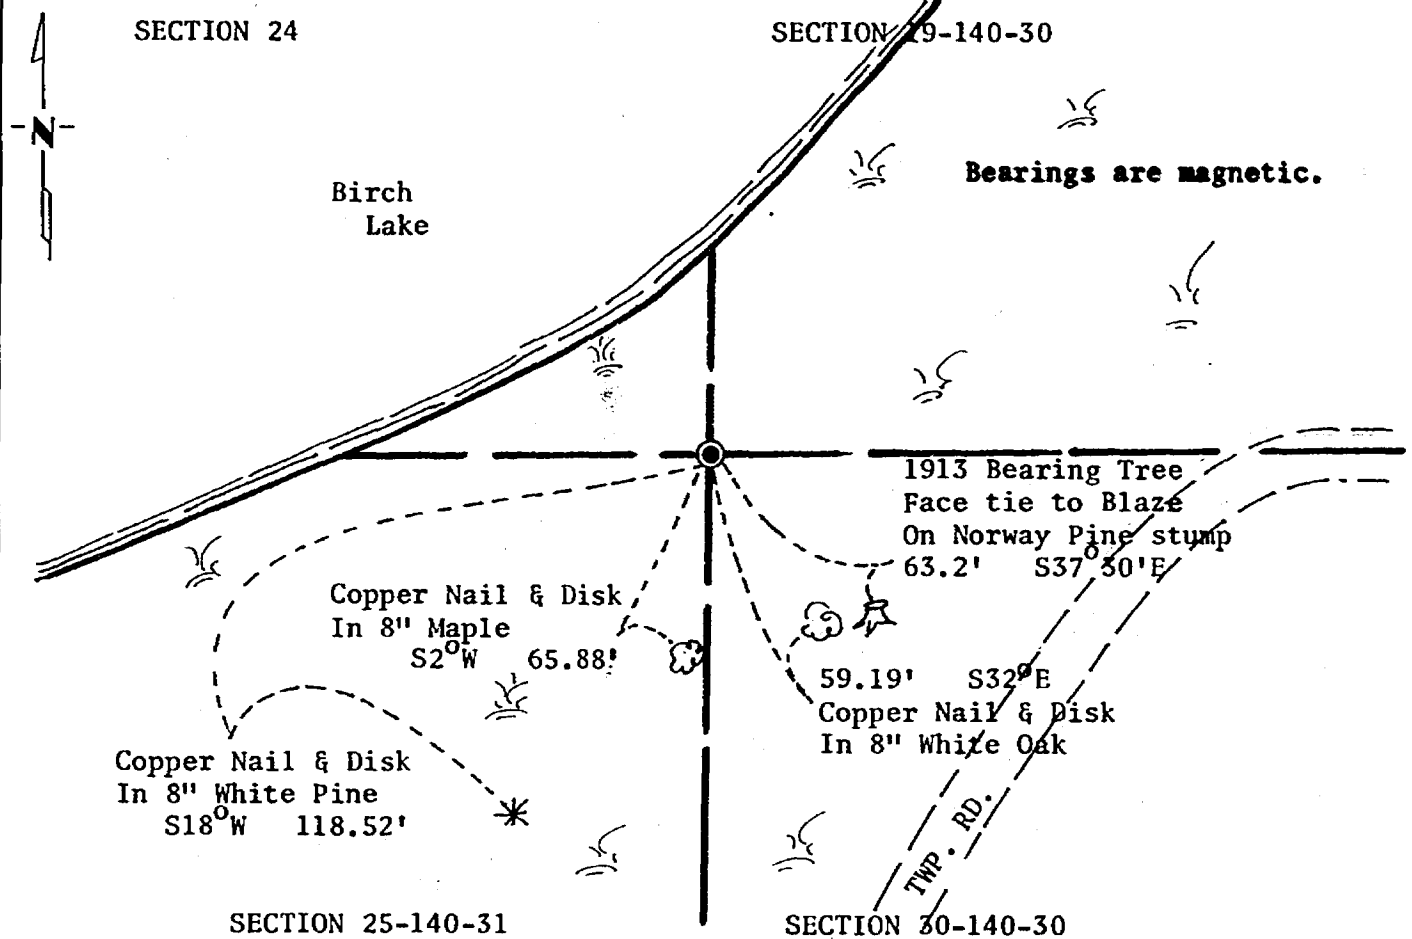

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James W. Nielsen 3/4/83
SIGNATURE DATE

Registration No. 11865

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

267917
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:15 A.M. on the 4 day of April A.D., 1983

County Recorder Claudine Koyler
By MS, Deputy

DOCUMENT NO. 267917

Statement of Evidence: Northeast Corner Section 25, Township 140 North,
Range 31 West, 5th Principal Meridian.

The original Public Land Survey was run in 1865 and a wood post was set to mark the corner.

In 1913 Mr. John Curo set a 2" capped pipe over a 8' tamarack post in the swamp from the original bearing trees and made two new bearing tree ties.

In 1946 the Government Land Office set a brass disk at the corner location.

In 1981 the Minnesota Department of Transportation recovered the GLO Brass disk and one of Mr. Curo's 1913 bearing tree stumps. The GLO brass disk checks Mr. Curo's bearing tree for bearing and the measurement to the blaze is 0.5' long. The old measurement was to a spike which would account for most of the difference.

The Minnesota Department of Transportation accpets the GLO brass dick as the perpetuation of the original Government Corner.

For details and survey analysis contact the Minnesota Department of Transportation Surveys Office in Brainerd, Minnesota.