

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SE Corner of Section 12, Township 143, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 12-27-1982 found a 2" pipe with brass cap in cleared power line
DATE

left monument as found, lowered monument, removed monument (explain)

On placed a
DATE

SKETCH OF REFERENCE TIES

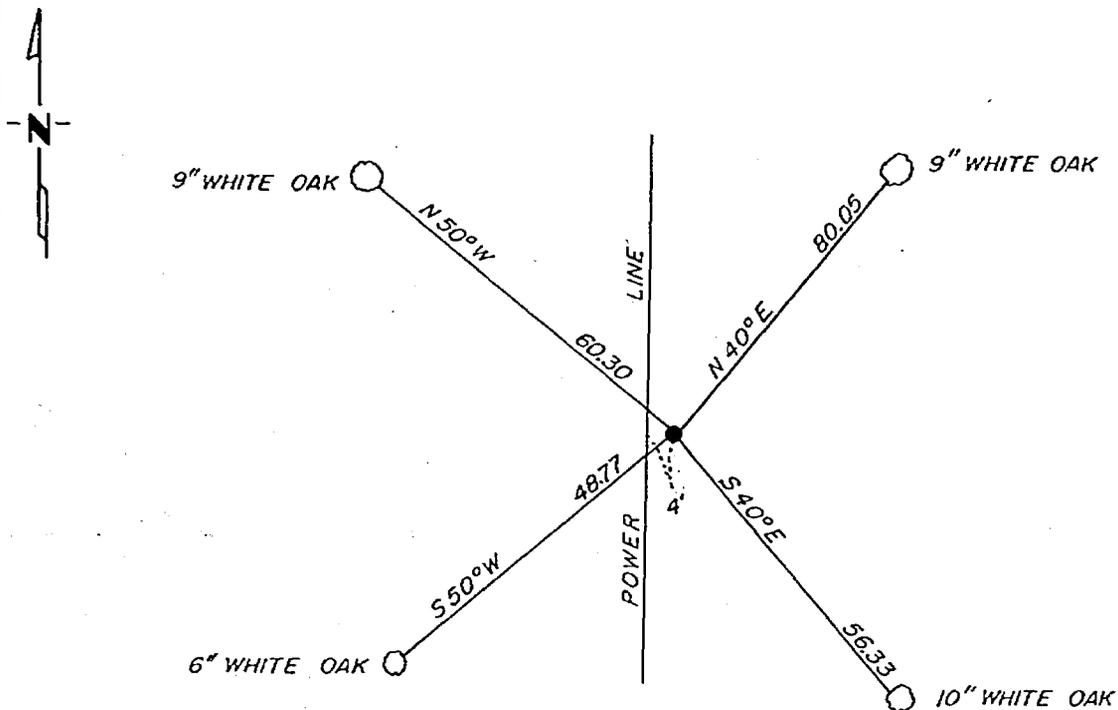

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lewis 3-18-83
SIGNATURE DATE

Registration No. 11395

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

268838
 OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:35 P.M. on the 18 day of May A.D., 1983

Register of Deeds Clouline Kayler

By MS, Deputy

DOCUMENT NO. 268838

Statement of Evidence:

In 1919, Albinus N. Kimmel, a US cadastral engineer set a 2"x36" iron pipe with brass cap for the corner to sections 12 and 13, 7 and 18, from which he marked the following bt's, a 4" white oak N 4-3/4 E 39 links, a 4" white oak S 46-1/4 W 26 links, a 12" poplar S 29-1/4 W 53 links, and a 5" poplar N 31-1/4 W 29 links.

On 12-27-1982, Walter E. Curp, a registered land surveyor and Ken Metcalf found the 2" iron pipe with brass cap standing in good condition. This corner is located in the center of a cleared power line. No evidence of original bt's. We mark new bt's as shown on the front.