

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

CS 1/16 Corner of Section 7, Township 143, Range 30, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 2-23-1983 found a 1" iron pipe with brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

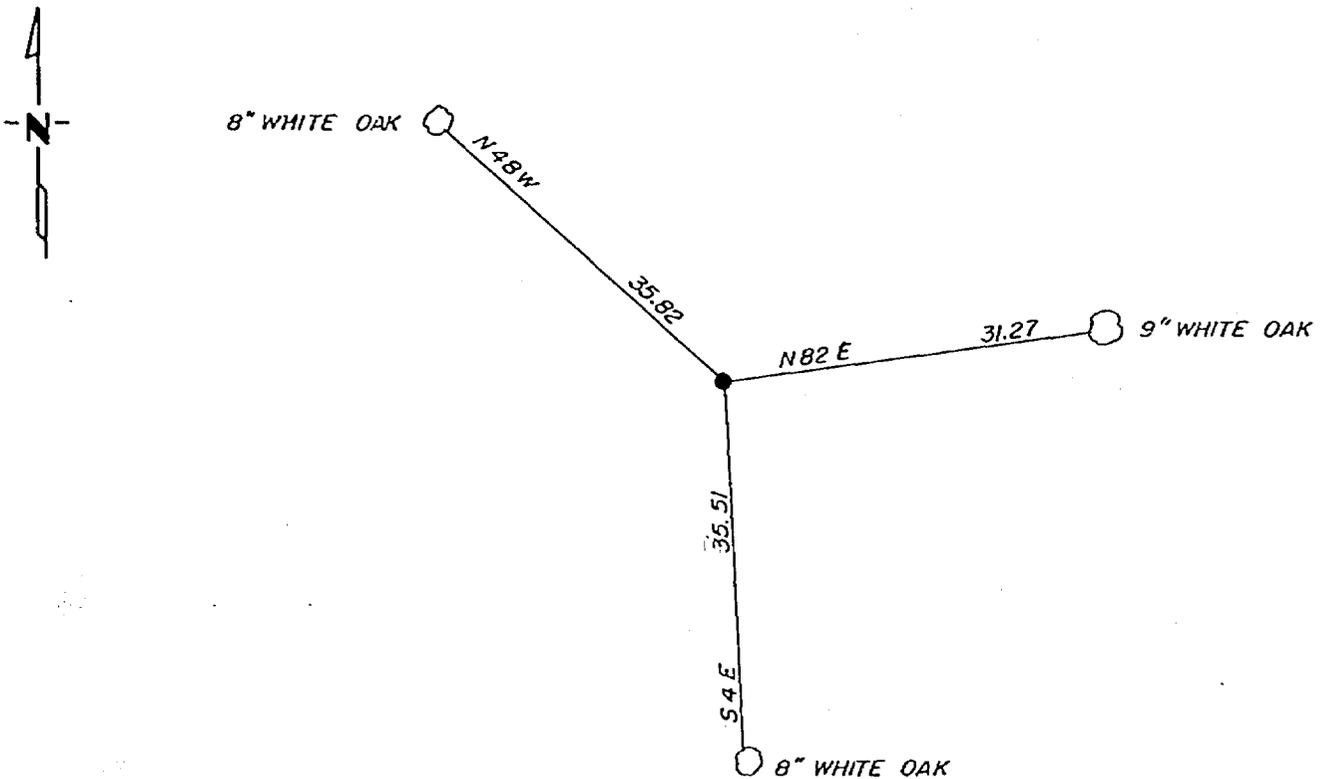

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lewis 3-18-83
SIGNATURE DATE

Registration No. 11395

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

268842
OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:55 P.M. on the 18 day of May A.D., 1983

Register of Deeds Clouline Kaylor

By MS, Deputy

DOCUMENT NO. 268842

Statement of Evidence:

In 1920, Earl Harrington, a US surveyor set a 1"x36" iron pipe with brass cap for the CS 1/16 corner from which he marked the following bt's, a 10" poplar N 72 E 7 links and a 22" red oak N 46-1/2 W 37 links.

On 2-23-1983, Walter E, Curo, a registered land surveyor found the 1" iron pipe with brass cap standing in good condition. N 46 W 37 links find rotted remains of a large oak. N 72 E 76 links find rotted remains of a stump. We mark new bt's as shown on front.