

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

AP 1 TR. 229 Corner of Section 18, Township 143, Range 30, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

On 3-4-1983 found a 1" iron pipe with brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

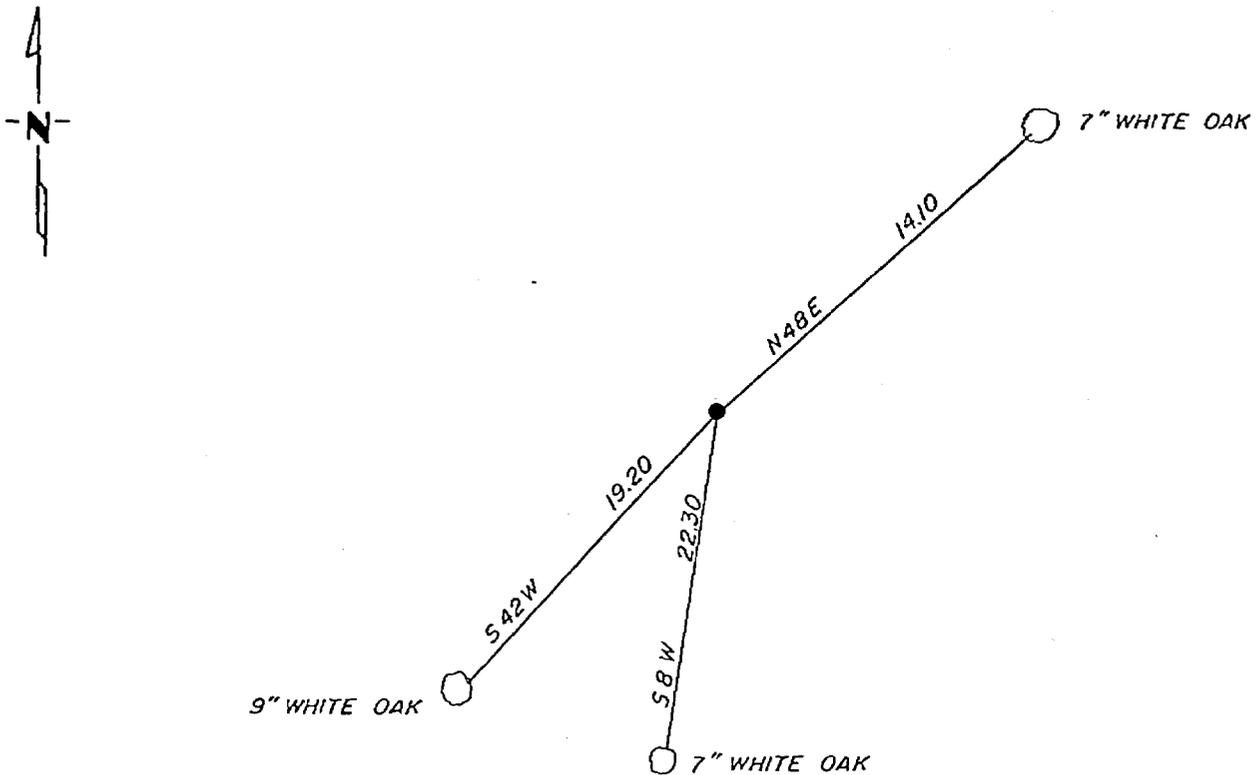

Statement of evidence relative to this corner location is on back of page.

268847

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

W. M. E. Cass 3-18-83
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:20 P. M. on the 18 day of May A.D., 19 83

Register of Deeds Clouline Koyler

By MS, Deputy

DOCUMENT NO. 268847

Statement of Evidence:

In 1919, Earl Harrington, a US surveyor set a 1"x36" iron pipe with brass cap for AP 1, tract 229, AP 2, tract 375 and tract 358. No bt's were marked.

On 3-4-83, Walter E. Curo, a registered land surveyor and Ken Metcalf found the 1" iron pipe with brass cap from which we mark the bt's as shown on the front.