

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH SIXTEENTH Corner of Section 16&17, Township 141, Range 27, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 9/4/80 found a GLO brass cap monument as set in 1919.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

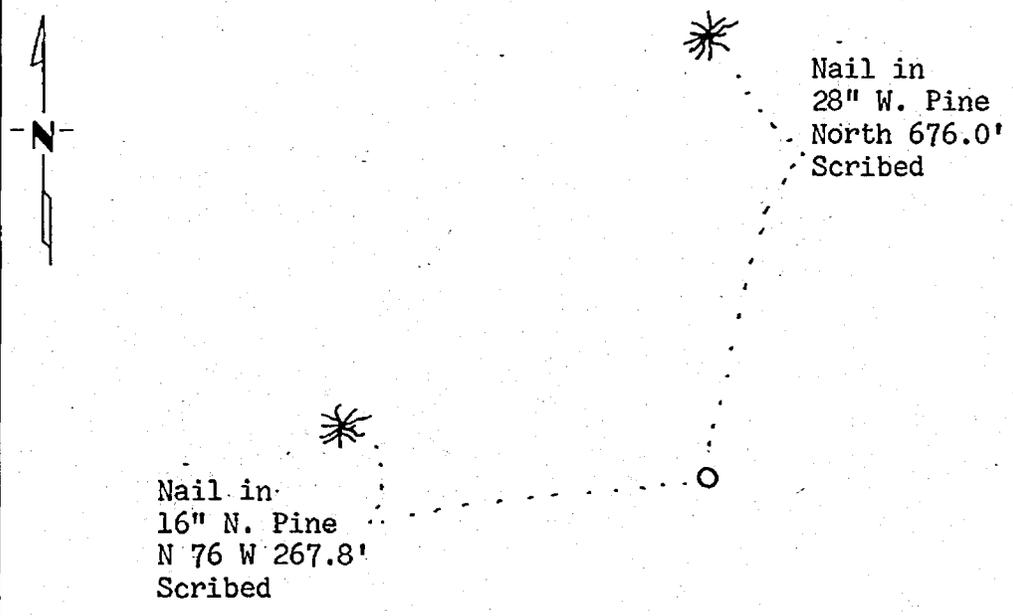

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sally H. Stevenson 9-14-82
SIGNATURE DATE

Registration No. 12684

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

279231
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 9:30 A.M. on the 5 day of Dec. A.D., 1984

County Recorder Claudia Kayler
By MS, Deputy

DOCUMENT NO. 279231

Statement of Evidence:

- 1919 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 8" N. Pine S. 66-45 W 334 links.
- 1980 U.S. Forest Service technician C. Krause found the corner monumented with a GLO brass cap monument in good condition up 4". The following bearing trees were found: 20" N. Pine S. 67 W 220.4' with scribing. Two new bearing trees were marked and are shown on this certificate. A steel sign post was set 4.1' east of the corner. Corner in cut over area that is now planted with Pine.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1919 by the GLO resurvey based on bearing tree evidence.