


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

SOUTH SIXTEENTH Corner of Section 15&16, Township 144, Range 29, 5th P.M.
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 12/19/80 found a GLO brass cap monument as set in 1926.
DATE
- left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

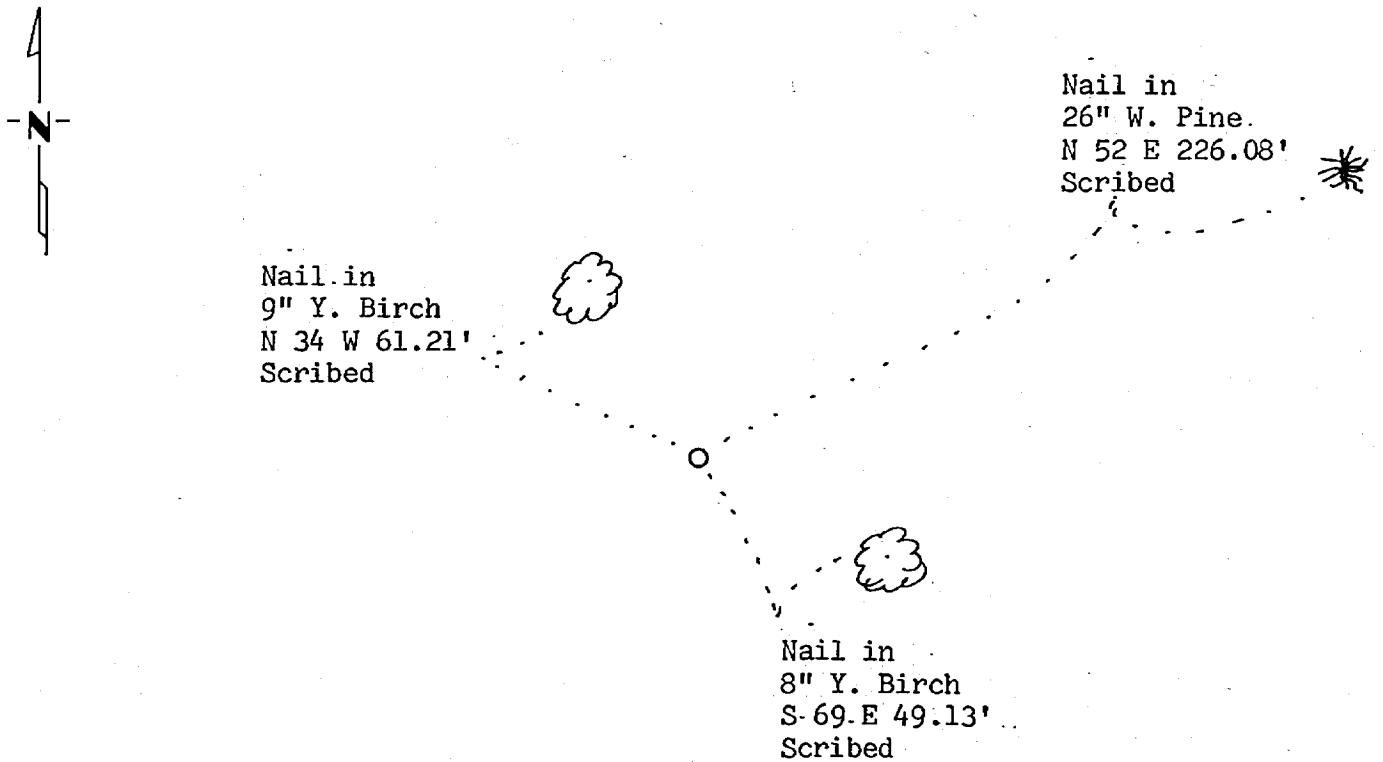

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Sam H. Stevenson 9-15-82
SIGNATURE DATE

Registration No. 12684

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

279376
 OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:50 P. M. on the 10 day of Dec. A.D., 1984

County Recorder Cloudine Kayler
 By MS, Deputy

DOCUMENT NO. 279376

Statement of Evidence:

- 1926 U.S. General Land Office dependent resurvey established this corner and an iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: 12" Ash S 62 E 54 links and 10" Ironwood N 6 W 13 links.
- 1970 U.S. Forest Service records show the following: S. Morrison found the brass cap monument.
- 1980 U.S. Forest Service technician G. Brama found the corner monumented with a GLO brass cap monument in good condition up 12". The following bearing trees were found: Rotted Ash stub laying on the ground at S 62 E 35.6'. No evidence found of the Ironwood. Three new bearing trees were marked and are shown on this certificate. Steel sign posts were set south and east of the corner.
- 1982 County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1982 Analysis of the above data indicates that the location of this Government corner has been perpetuated. I accepted the monument as marking the corner location as when set in 1926 by the GLO resurvey based on bearing tree evidence.