

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness corner to _____ between _____
Meander #26 _____ Corner of Section 8 & 17, Township 141N, Range 31W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 12-14-84 placed a 2½ inch (O.D.) by 5 foot long iron pipe with a
DATE
3 inch diameter brass cap, stamped as shown, up 1.0 feet.

Declination: 6° East

SKETCH OF REFERENCE TIES NOT TO SCALE

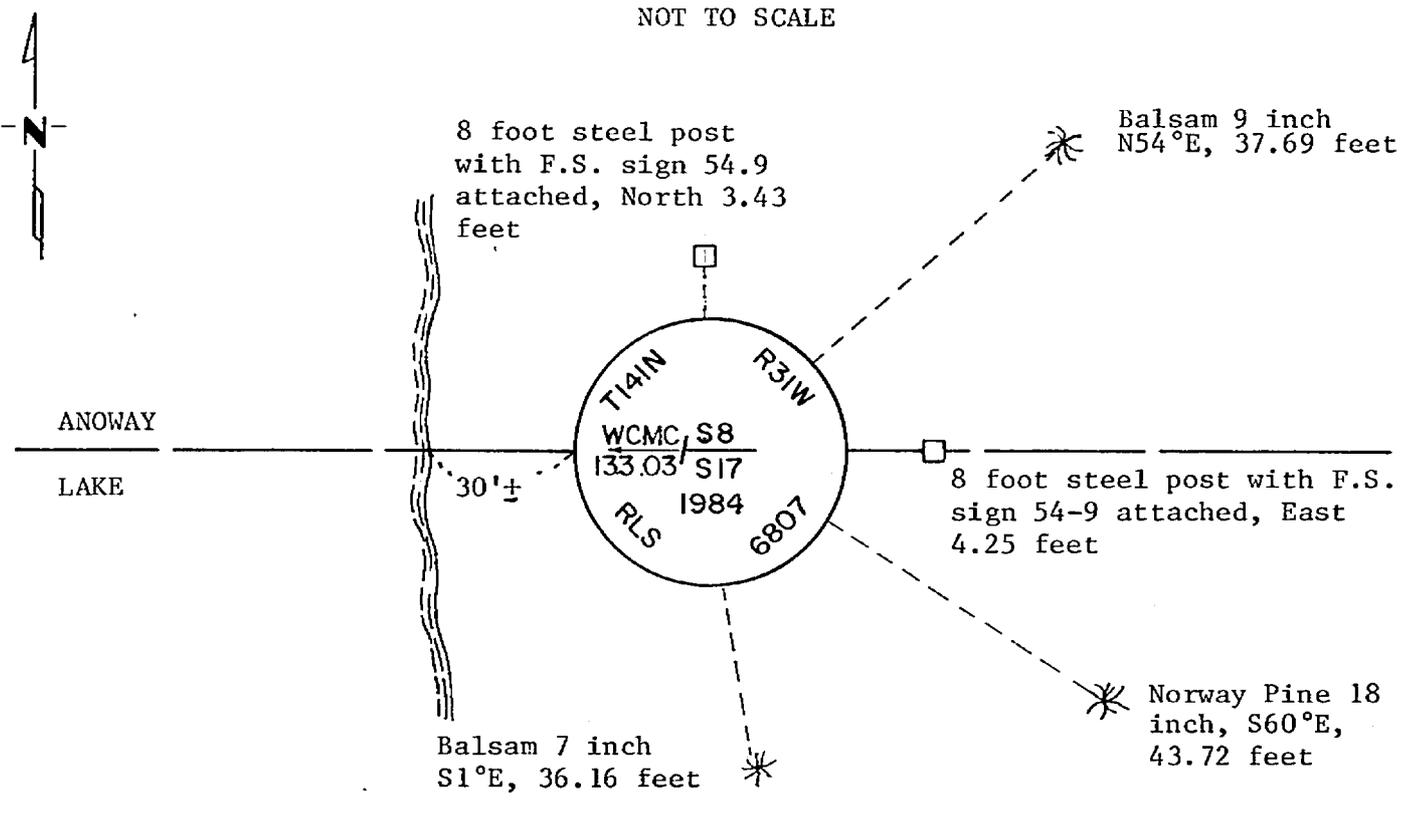

NOTE: All bearing trees are painted red and marked with F.S. sign No. 54-3 with a nail in base, double blazed and scribed.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William D. O'Rourke 2-1-85
SIGNATURE DATE

Registration No. 6807

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

280566
OFFICE OF COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorder's office at 10:10 A.M. on the 27 day of February A.D., 1985

County Recorder Cloudine Kayler
By MS, Deputy

DOCUMENT NO. 280566

Statement of Evidence: Witness Corner Meander Corner between Sections 8 and 17,
Township 141 North, Range 31 West, 5th Principal Meridian.
East side of Anoway Lake.

1873 P.H. Conger, U.S. Deputy Surveyor, set a post for this Meander Corner in his subdivision of the Township between August 5, 1873 and August 30, 1873. As references he scribed:

Tamarack	12 inch	N37°E	9 links	(5.94 feet)
Tamarack	4 inch	S17°E	7 links	(4.62 feet)

1902 Army Corp of Engineers notes indicate the corner and one BT a 4 inch Tamarack S17°E, 7 links still standing but dead during their survey for the Leech Lake Reservoir.

1984 Kelly M. Booge, under F.S. Contract No. 53-6392-4-00996, made a thorough search for physical evidence of this corner on October 4, none was found. He returned on December 14, and searched for evidence on the corner position but found no further evidence. The proportioned distance for the lost position of the Meander Corner falls in the lake. He then set a monument 2½ inch (O.D.) x 5 foot long iron pipe with a 3 inch diameter brass cap for a Witness Corner with ties as shown on the sketch.

Kelly M. Booge is an employee of Okerman Surveying, Inc.