

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North 1/4 Corner of Section 8, Township 144N, Range 25W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 12-14-1984 placed a 5/8" by 5 feet long aluminum rod with 3"
DATE
aluminum cap. Up .80'

5° East declination

SKETCH OF REFERENCE TIES
Not to Scale

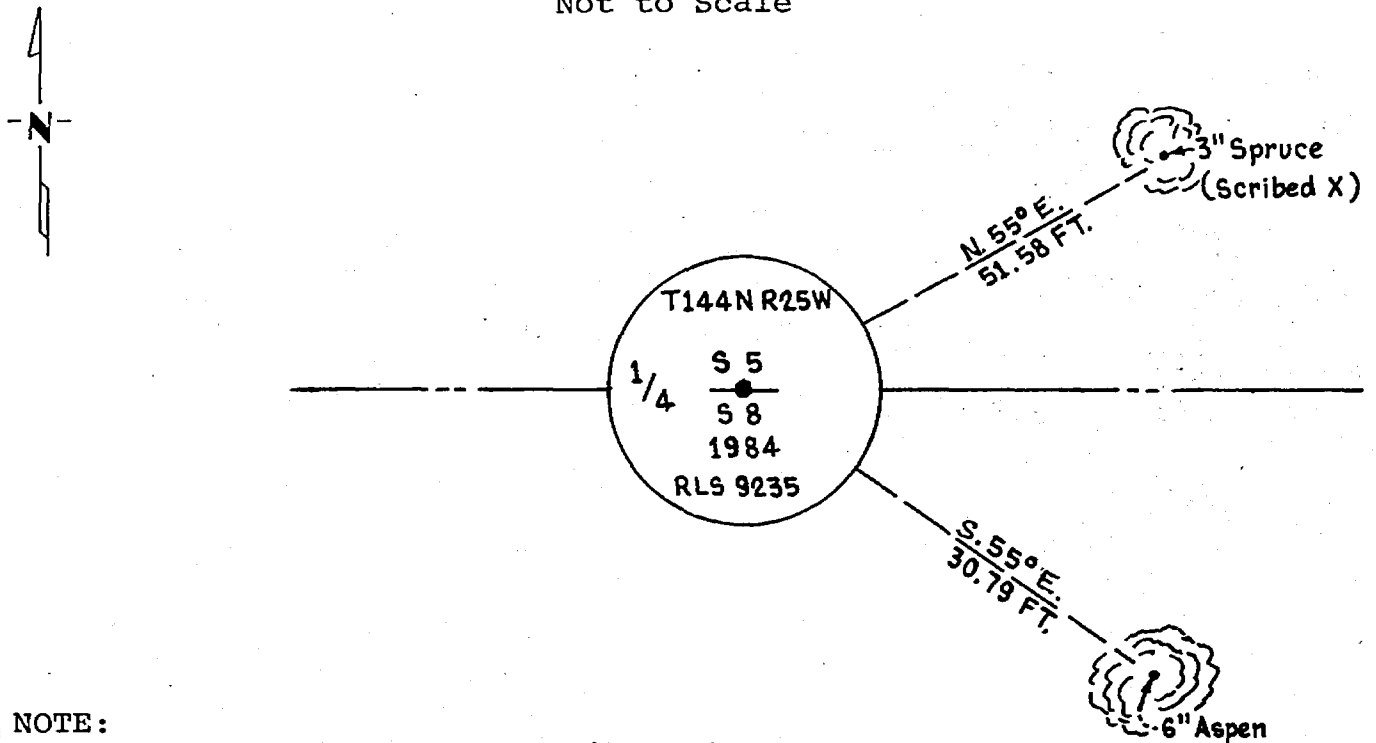

NOTE:

Trees are blazed and scribed with B.T. tags. Distances shown are to a 20^d nail in notch painted red on side of tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Parker 3/29/85
SIGNATURE DATE
Registration No. 9235
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

281669

OFFICE OF THE COUNTY RECORDER
County of Cass
I hereby certify that this document was filed in the Co. Recorders office at 3:40 P.M. on the 2 day of May A.D., 1985
County Recorder Clairine Kayler
By MS, Deputy
DOCUMENT NO. 281669

Statement of Evidence:

E7

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and referenced by the following:

A 6" Tamarack that bears N35°E a distance of 15 links [9.90 feet]
A 4" Tamarack that bears S56°W a distance of 6 links [3.96 feet]

On June 26, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner and the above mentioned references but to no avail.

On December 14, 1984, an additional search was made by Advance prior to reestablishing this corner at its "lost" position half way and on line between adjacent Section corners.