

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

West 1/4 Corner of Section 18, Township 144N, Range 25W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

On _____ found a _____
DATE


left monument as found, lowered monument, removed monument (explain)

On 10-23-1984 placed a 5/8" x 36" aluminum rod with 3" aluminum
DATE cap stamped as shown. Down .30'

5° East declination

SKETCH OF REFERENCE TIES

Not to Scale

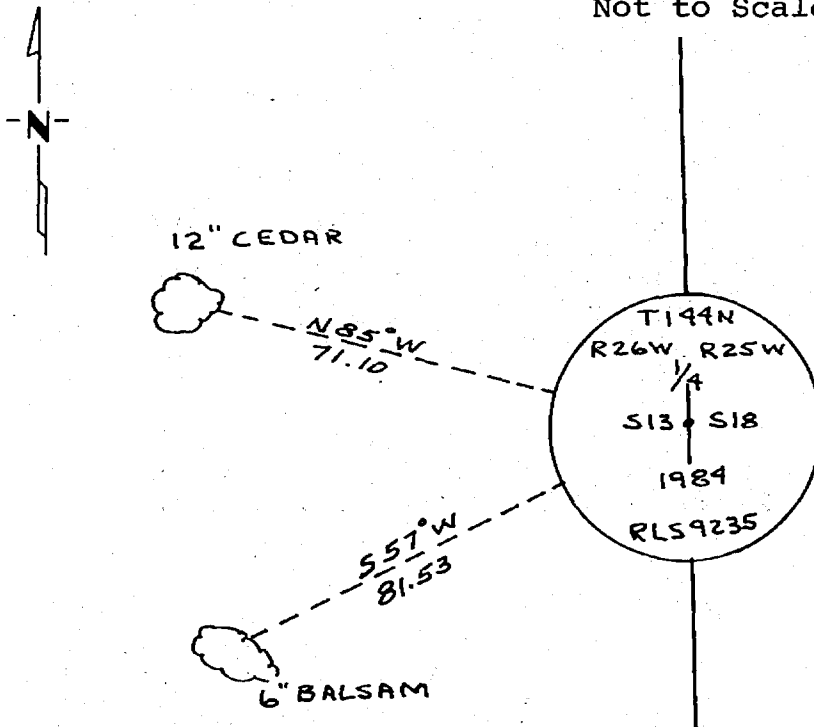

Note: Corner is approx. E Co. Rd. #3
Down .30', Trees are blazed &
scribed with B.T. tag. Distances
shown are to 20^d nail in notch
painted red on side of tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data
contained herein was prepared by me or under
my direct supervision.

James H. Park 4/24/85
SIGNATURE DATE

Registration No. 9235

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

281714
OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in
the Co. Recorders office at 2:50 P. .M. on the
3 day of May A.D., 1985

County Recorder Clouline Kayler
By MS, Deputy

DOCUMENT NO. 281714

Statement of Evidence:

L1

This corner was originally established in July 2, 1873, by P.H. Congar, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Congar's notes state that a post was set to mark the corner and referenced by the following:

A 8" Cedar that bears N85°W a distance of 6 links [3.96 feet]
A 5" Cedar that bears EAST a distance of 7 links [4.62 feet]

In March, 1912, John W. Curo notes state that he found both Gov't Bearing Trees, one standing and plainly marked, the other is down, from this he set stake for true corner position referenced by:

A 8" Cedar that bears N75°E a distance of 19.80 feet
A 12" Cedar that bears S70°E a distance of 35.10 feet
From County Survey Record Book " A ", pages 516 to 518.

In August 1919, John W. Curo's notes state nothing found or set by him. From County Survey Record Book " C ", page 178.

On August 14, 1984, personnel from Advance Surveying & Engineering Company search for this corner position which we determine from our field traverse but to no avail.

On October 23, 1984, personnel from Advance Surveying & Engineering Company set a monument as shown on the sketch in the lost position between adjacent Section Corners.