

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

East 1/4 Corner of Section 32, Township 144N, Range 25W, 5th P.M.


STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9-13-1984 placed a 2 1/2" (O.D.) by 5 feet long galvanized iron
DATE pipe with 3" brass cap stamped as shown up 1.5 feet

5° East declination

SKETCH OF REFERENCE TIES
 Not to Scale

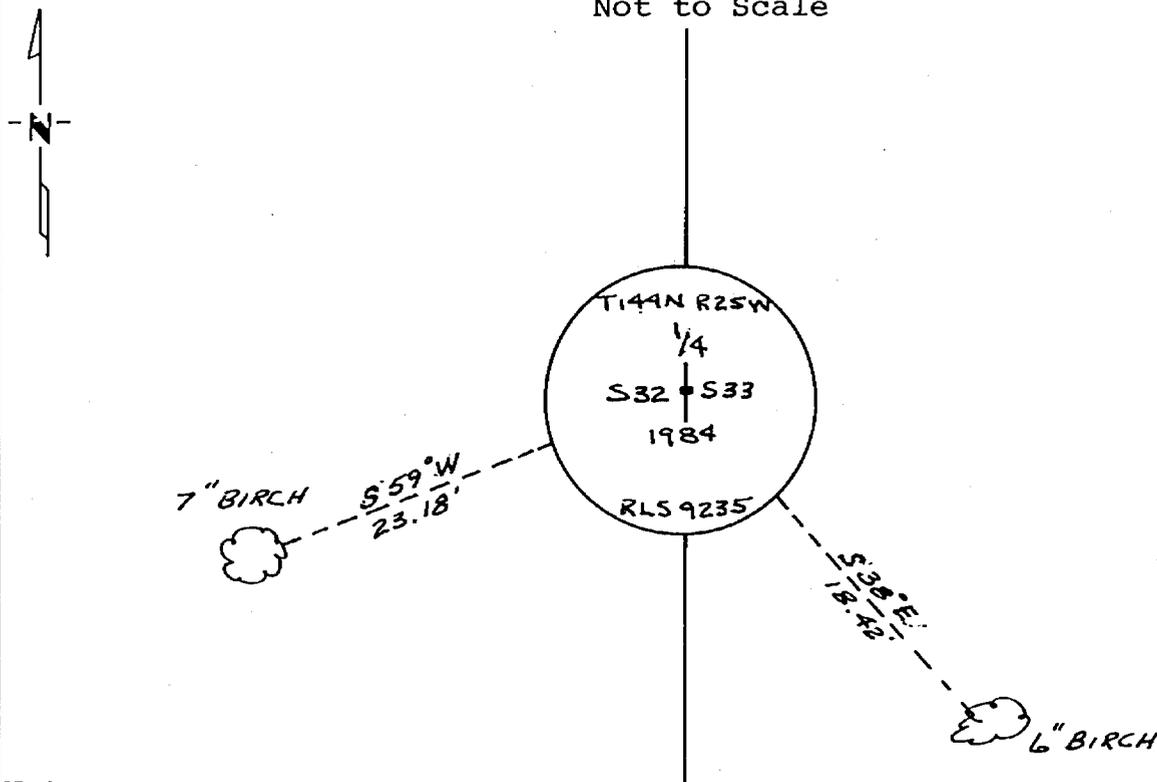

Note:

Trees are blazed & scribed with B.T. tag. Distances shown are to a 20^d nail in notch painted red on side of tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

James H. Dahl 3/29/85
SIGNATURE DATE

Registration No. 9235
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

281982

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 12:10 P.M. on the 15 day of May A.D., 19 85
 County Recorder Claudia Kayler
 By ms, Deputy
 DOCUMENT NO. 281982

Statement of Evidence:

X9

This corner was originally established in April, 1876, by B.C. Baldwin, Deputy Surveyor. The field notes of that survey are filed in the office of the Secretary of State, St. Paul, Minnesota. Mr. Baldwin's notes state that a post was set to mark the corner and referenced by the following:

A 6" White Pine that bears N83°E a distance of 58 links [38.28 feet]
A 16" White Pine that bears S65°E a distance of 58 links [38.28 feet]

On July 16, 1984, personnel from Advance Surveying & Engineering Co. made a thorough search for this corner and the above mentioned references but to no avail.

On September 13, 1984, an additional search was made by Advance prior to reestablishing this corner at its "lost" position half way and on line between adjacent Section corners.