

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


NORTHEAST Corner of Section 23, Township 133, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 1/9/85 found a 2" x 32" cast iron pipe with bottom lug set in
DATE
concrete, replaced in same location with cast iron county monument.
 left monument as found, lowered monument, removed monument (explain)
- On 8/3/85 placed a standard cast iron county monument 9" below road
DATE
surface.

SKETCH OF REFERENCE TIES

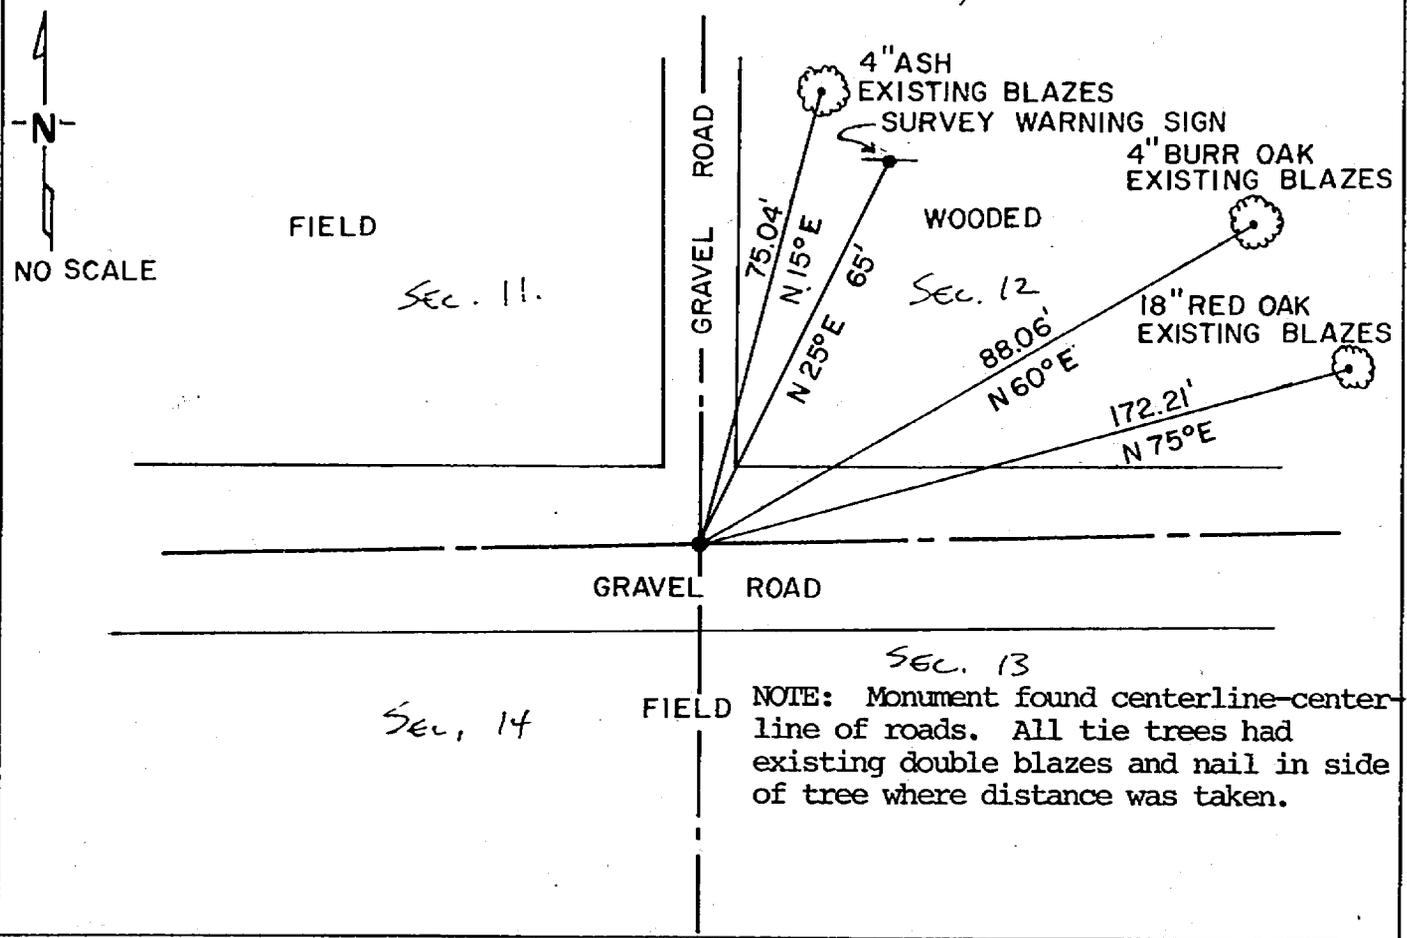

NOTE: Monument found centerline-centerline of roads. All tie trees had existing double blazes and nail in side of tree where distance was taken.

Statement of evidence relative to this corner location is on back of page. 285676

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David J. Landwehr 9/13/85
SIGNATURE DATE

Registration No. 17008

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY-RECORDER
 County of Cass

I hereby certify that this document was filed in the RECORDER'S office at 3:25 P.M. on the 8 day of Nov. A.D., 1985

COUNTY RECORDER Claudine Kayler
 By DMS, Deputy
 DOCUMENT NO. 285676

STATEMENT OF EVIDENCE FOR: Northeast corner, Section 23, Township 133 North, Range 31 West, Cass County, Minnesota.

In 1863, the original Government Survey was performed and a wood post was set to mark this corner location.

In 1912 John Curo found stump of Southwest bearing trees and roots of Northwest and Southeast bearing trees and set a 2½" x 36" galvanized iron pipe in concrete. County Book A, page 496-498.

In 1917 E. B. Horst found iron monument. County Book "C", page 83.

In 1981 Alle Welle, RLS #11873 finds and uses monument in survey of Section to West in Township.

In 1984 and 1985 Landecker & Associates, Inc. find and use monument as set by Curo in 1912 and further accepts this monument to be a perpetuation of the original Government corner.