

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 9, Township 141N, Range 26W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:


On 11-20-86 found a 1 1/4" Iron Pipe 30" long.  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 12-22-86 placed a 2" U.S.F.S. Iron Pipe with Brass Cap,  
DATE  
stamped to identify corner.

\*Magnetic:  $4\frac{1}{2}^{\circ}$  E. decl. SKETCH OF REFERENCE TIES

Based on Solar  
Observation 12-20-86

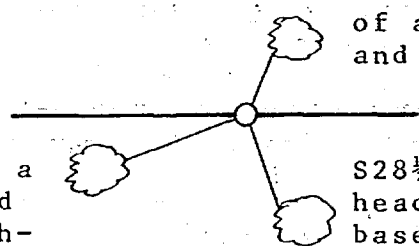

S79 1/2° W 31.41' to a  
16d double headed  
nail in the north-  
erly base of a 6 1/2"  
diameter blazed and  
scribed Birch.

N29 1/2° E 9.42' to a 16d double  
headed nail in the west base  
of a 10" diameter blazed  
and scribed Maple.

S28 1/2° E 21.63' to a 16d double  
headed nail in the easterly  
base of a 15" diameter  
blazed and scribed Red Oak.

Monument is stamped

T141N R26W  
S 4  
S 9  
1986  
RLS 11946

Monument is located

on a northerly facing slope  
301' south of the centerline  
of Minnesota Highway #200.  
Signs 54-2 and 54-9 and post  
east 4.0', and north 4.0'.

Statement of evidence relative to this corner location is on back of page. 295219

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Robert M. Muelton

Date 2-23-87 Registration No. 11946

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 1:45 P. M. on the 23 day of February A.D., 19 87

County Recorder Clodine Kaye  
By ms, Deputy

DOCUMENT NO. 295219

Statement of Evidence:

During April 1871, Walker, Allen and Putnam, under contract with the U.S.G.L.O., surveyed and marked the East, North and West lines of Township 141 North, Range 26 West of the 5th P.M.

During May of 1871, Walker, Allen and Putnam, Contract Surveyors, surveyed and marked the interior lines of the Township.

During the 1960's, according to local landowners, surveys were made in part of Section 4, for the purpose of laying out lots and marking boundary lines, by unknown surveyors.

A 1935 Minnesota Highway Department right of way map shows a squared 4" X 4" wooden stake at the south quarter corner of Section 4..

During 1977, Roger A. Mustonen, RLS #11946, employed by W.J. Spain, JR & Associates found a 1½" iron pipe monument, along with several blazed trees facing the corner, and accepts same as marking the south quarter corner of Section 4. A 1" iron pipe monument was also found on line at mid-point between this accepted south quarter corner and the southwest corner of Section 4.

On December 30, 1977, the plat of RE-ECHO RIDGE, signed by Roger A. Mustonen, RLS #11946, was recorded by the Cass County Recorder.

On November 20, 1986, Roger A. Mustonen, RLS #11946, under contract with the USDA Forest Service, found a 1½" iron pipe monument, along with several blazed trees facing the corner, and accepts same as marking the south quarter corner of Section 4. The half mile from the east measures about 2 chains long. However, the intersection of old roads easterly, southerly and north-northwesterly is at the mid-point between this accepted corner and the southeast corner of Section 4. This found monument is accepted as marking the south quarter corner of Section 4 and on December 22, 1986 was replaced with a USDA Forest Service monument. (See other side for ties, etc.)

Original G.L.O. survey set a wood post, from which:  
Birch 10" S5°E 18 lks  
Birch 10" N52°W 24 lks.

No evidence of G.L.O. bearing trees found.