

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 18, Township 140, Range 26, 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On 2-4-80 found a 2" iron pipe with oval cap and one 1871 GLO BT.
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

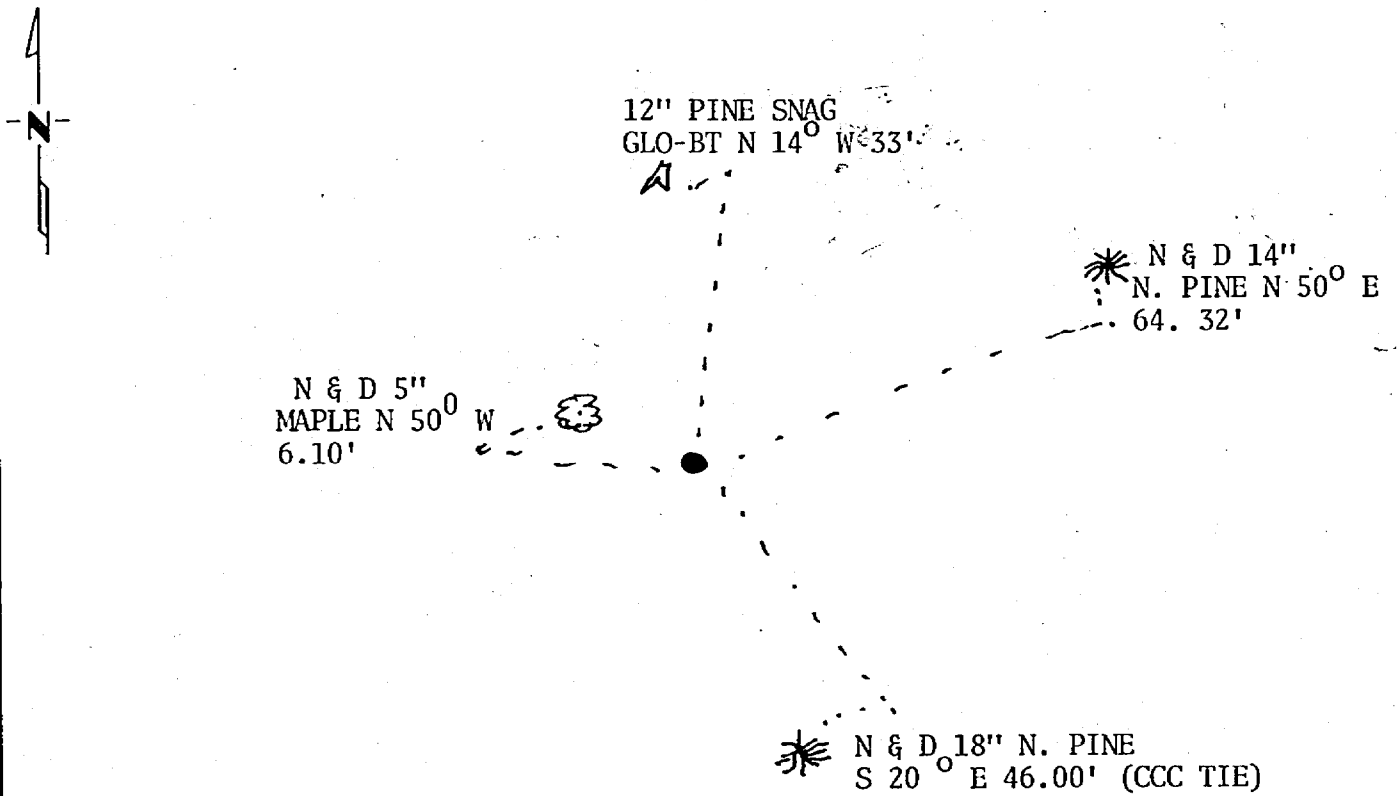

BEARINGS ARE APPROXIMATE

Statement of evidence relative to this corner location is on back of page. 295285

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

May H. Stevenson 2/21/87
SIGNATURE DATE

Registration No. 12684

Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:40 P.M. on the 25 day of February A.D., 19 87

County Recorder Clondine Kayler

By ms Deputy

DOCUMENT NO. 295285

Statement of Evidence:

- 1871 - U.S. General Land Office survey (set wood post) for this corner and marked the following bearing trees: 16" N. Pine S 40° E 13 links (8.58') and 6" N. Pine N 14° W 51 links (33.66').
- 1937 - CCC notes at MN/DNR Washburn Lake Forestry station show old scribed post and B.T.'s found. BTs shown: 8" N. Pine S $12\frac{1}{2}^{\circ}$ E 46.8' and 12" Pine stump N $17\frac{1}{2}^{\circ}$ W 34'. They give distance of 2715 east to NE corner of Sec. 18.
- 1979 - County Surveyor's Records in the Recorder's Office were checked and no resurvey information was found on this corner.
- 1980 - Traversed north line of Sec. 18 and found the corner marked by 2" iron pipe with 3" x 5" oval cap. One GLO bearing tree was found: Pine snag with visible scribing N 14° W 33' and one CCC tie tree: 18" N. Pine S 20° E 46.0. Pipe was in good condition and was left as found with new ties taken as shown on this certificate. We measured 2716.64' east to the NE corner of Sec. 18.