

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 4, Township 135 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 8/11/86 placed a cast iron monument, down 0.7'
DATE

SKETCH OF REFERENCE TIES

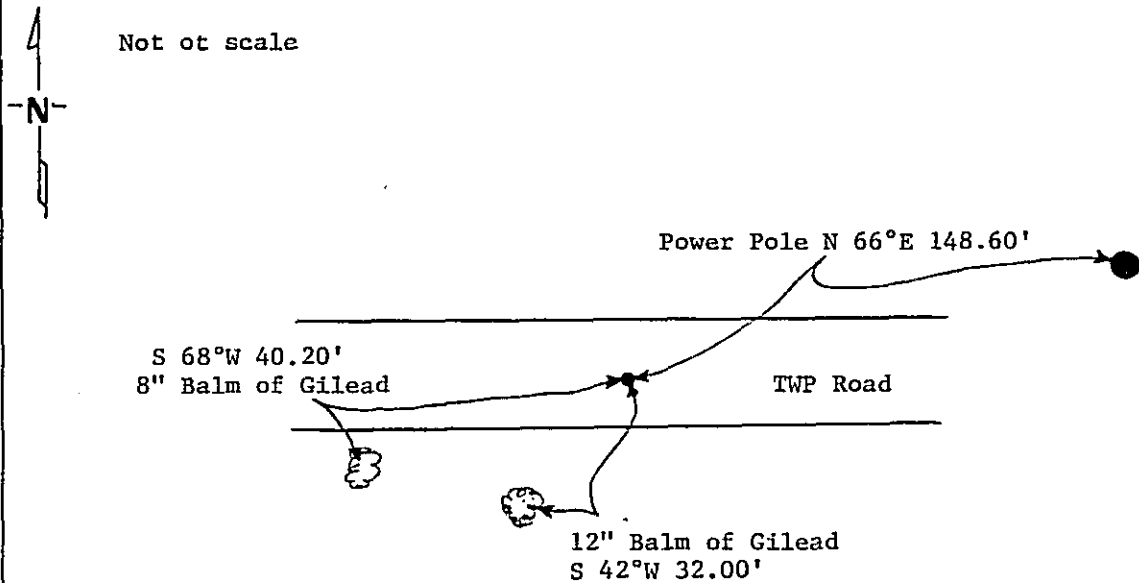

Measurements are to nail in side of object.
Bearings are assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page. 297161

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Cass 1-22-87
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:10 A.M. on the 1 day of June A.D., 19 87

Register of Deeds Clairline Kayler

By ms, Deputy

DOCUMENT NO. 297161

STATEMENT OF EVIDENCE North Quarter Corner Section 4, T.135 N., R.32 W., 5th P.M.

- 1858 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 14" Sp. Pine SOUTH 31 lks., 10" Sp. Pine S 70°E 10 lks.
- 1985 On August 26, Terry Freeman, Cass County Survey Technician, searched area of corner with metal locator and found nothing.
- 1985 On Sept. 17, Terry Freeman and backhoe operator, Ken Meyer, dug 11' N-S x 10' E-W x 2.75' deep hole in E-W road. Road consisted of 3" sand top, 1'6" of fill and dug 1' into natural sandy-loam. Found nothing. Dug at location provided by Comstock & Davis by splitting north lines of Sections 3 & 4. (fence S. at this location)
- 1986 On August 11, Terry Freeman and Dan Gordon set a cast iron monument down 0.7', at fence south and centerline of E-W road.