


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter _____ Corner of Section 9, Township 135 N., Range 32 W., 5th P.M.
STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 8/11/86 placed a cast iron monument, down 6"
DATE

SKETCH OF REFERENCE TIES

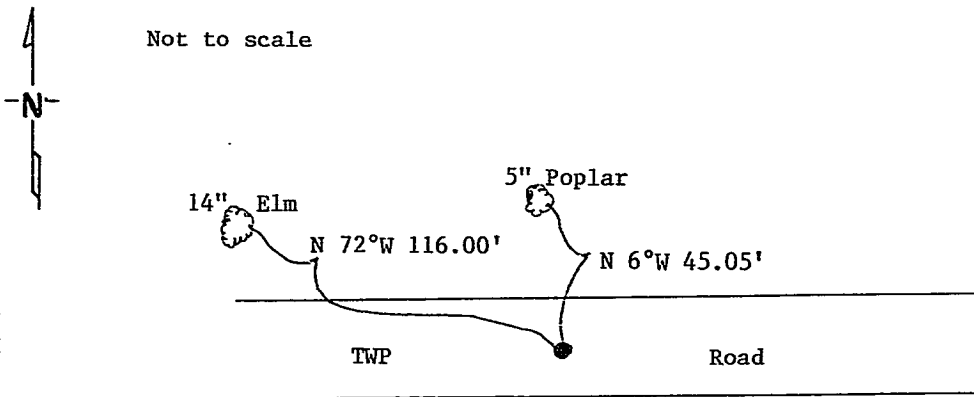

Measurements are to nail in side of tree.
Bearings assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page.

297167

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Robert E. Lewis 1-22-87
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 9:40 A.M. on the 1 day of June A.D., 19 87

Register of Deeds Clodine Kaye
By m s, Deputy

DOCUMENT NO. 297167

STATEMENT OF EVIDENCE North Quarter Corner Section 9, T.135 N., R.32 W., 5th P.M.

- 1866 U.S. General Land Office survey set a wood post for this corner there were no trees near and ground too wet for mound.
- 1985 On Sept. 19, Terry Freeman, Cass County Survey Technician, and Ken Meyer, backhoe operator dug at location provided by Comstock and Davis using measurements along the north lines of Sections 9 & 10. Dug 10' E-W x 9' N-S x 1.75' deep. 1' of sand top and 8" fill, under which was a layer of cordoroy. Found nothing.
- 1986 On August 11, Terry Freeman and Dan Gordon set a cast iron monument, down 6" at proportioned distance E-W in centerline of E-W road.