


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 6, Township 134 N., Range 32 W., 5th P.M.
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 9/30/86 placed a 2" x 18" telespar monument with stamped aluminum
DATE cap down 10" in E-W road at single proportion location.

SKETCH OF REFERENCE TIES

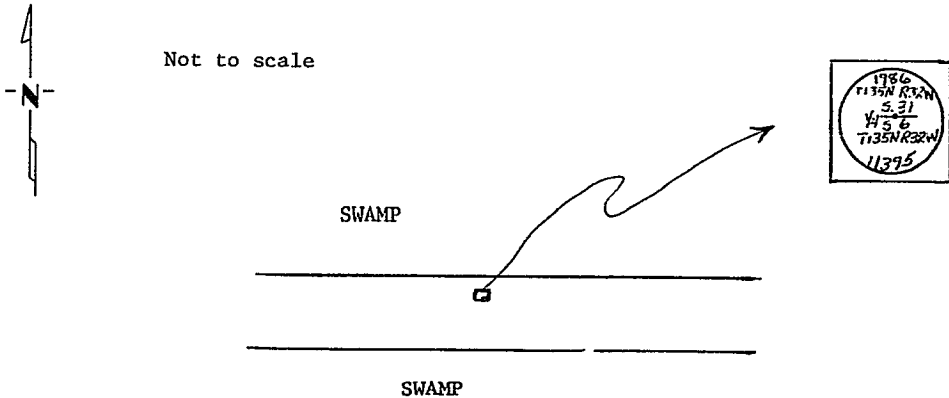

No trees near for ties.

Survey marker sign 21.0' south of corner.

Statement of evidence relative to this corner location is on back of page.

297512

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lars 1-23-87
SIGNATURE DATE

Registration No. 11395

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:30 A.M. on the 12 day of June A.D., 19 87

County Recorder Clondie Kaye

By mj, Deputy

DOCUMENT NO. 297512

Statement of Evidence: North Quarter Corner Section 6, T.134 N., R.32 W., 5th P.M.

1858 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 9" SP.Pine S $84\frac{1}{2}^{\circ}$ W 450 lks., 10" Sp.Pine N $86\frac{1}{2}^{\circ}$ W 410 lks.

1986 On Sept. 30, Terry Freeman, Cass County Survey Technician and Jim Cripps and Norman Maunu set a 2" x 18" telespar monument with stamped aluminum cap down 10" in E-W road at single proportion location provided by Comstock & Davis.

In 1858, GLO measured 77.33 chains (5103.78') from the northeast corner to the northwest corner of Section 6. In 1986, Comstock & Davis measured 5104.58'. NW of 6 to this corner is 2464.17' and from this corner to the NE of 6 is 2640.41'.