

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 3, Township 134 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 8/25/86 placed a cast iron monument down 1.3' in centerline E-W road
DATE
at proportional position E-W

SKETCH OF REFERENCE TIES

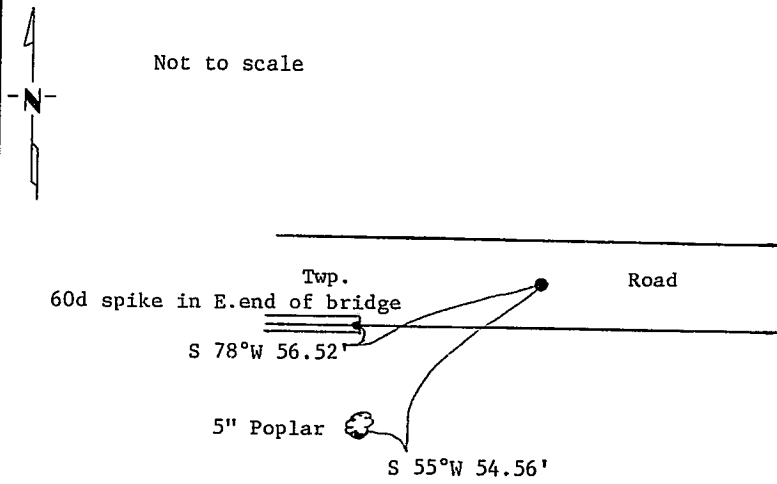

Measurements are to nail in bearing object.
Bearings are assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page. 297516

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Lem 1-23-87
SIGNATURE DATE

Registration No. 11395
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:50 A.M. on the 12 day of June A.D., 19 87
 County Recorder Claudine Kayle
 By MS, Deputy
 DOCUMENT NO. 297516

Statement of Evidence: North Quarter Corner Section 3, T.134 N., R.32 W., 5th P.M.

- 1858 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 12" Sp Pine S $89\frac{1}{2}^{\circ}$ E 482 lks., 10" Sp.Pine N 88° W 519 lks.
- 1985 On Sept. 19, Terry Freeman, Cass County Survey Technician and Ken Meyer, backhoe operator dug at location provided by Comstock & Davis. Dug 11' E-W x 9' N-S x 5' deep. 6" sand & gravel, 2.5' fill, 1' peat, and dug 1' into natural sandy-loam. Layer of sticks & branches on top of peat. Found nothing.
- 1986 On August 25, Terry Freeman and Jim Cripps set a cast iron monument at proportional position E-W, in centerline of road, provided by Comstock & Davis.