

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


North Quarter Corner of Section 2, Township 134 N., Range 32 W., 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 8/14/86 placed a cast iron monument in centerline of E-W road at  
DATE proportional position E-W.

### SKETCH OF REFERENCE TIES

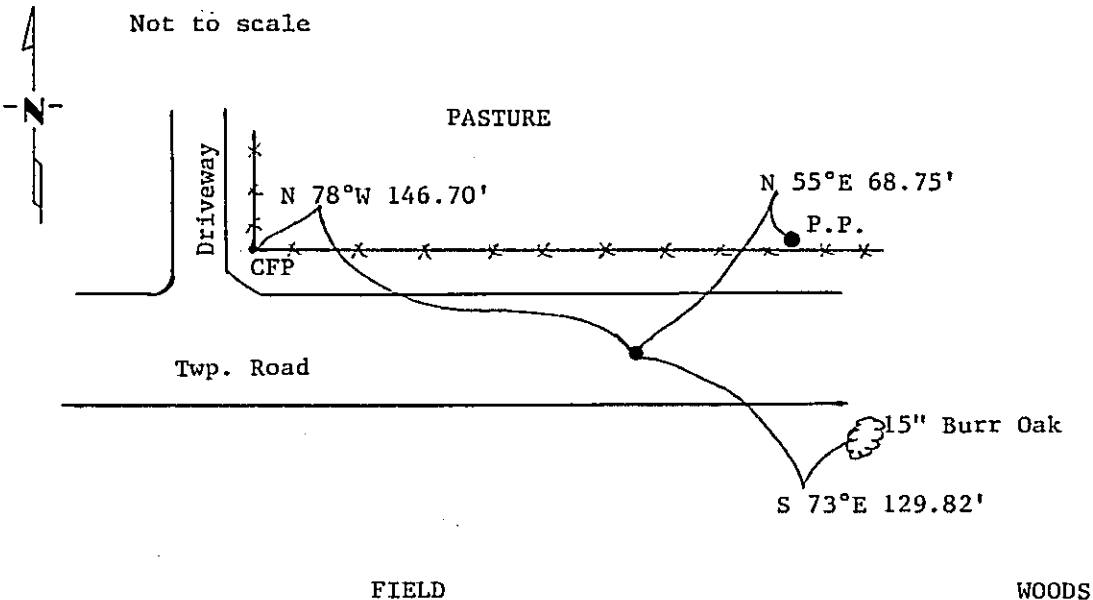

Measurements are to nail in side of object.  
Bearings are assumed using 5° declination.

Statement of evidence relative to this corner location is on back of page. 297518

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Casro 1-23-87  
SIGNATURE DATE

Registration No. 11395  
 Land Surveyor,  Professional Engineer  
 County Surveyor,  County Engineer

OFFICE OF THE COUNTY RECORDER  
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:00 A.M. on the 12 day of June A.D., 19 87

County Recorder Clondine Kayle  
By Ms, Deputy

DOCUMENT NO. 297518

**Statement of Evidence:** North Quarter Corner Section 2, T.134 N., R.32 W., 5th P.M.

- 1858 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 14" Aspen N 29°E 22 lks., 7" W. Oak N 10°W 20 lks.
- 1985 On Sept. 19, Terry Freeman, Cass County Survey Technician and Ken Meyer, backhoe operator dug at proportional position provided by Comstock & Davis. Dug 11'E-W x 10'N-S x 3' deep. Found nothing.
- 1986 On August 14, Terry Freeman, Jim Cripps and Norman Maunu set a cast iron monument in centerline of E-W road at proportional position provided by Comstock & Davis. Position lines up with partial fence S. in field.