


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Northeast Corner of Section 28, Township 141 N., Range 31 W., 5th P.M.
STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 10/20/87 found a 2 3/4"x60" I.P. with marked brass cap as per corner
DATE
certificates filed in 1959 by H. Curo and in 1982 by G. Stevenson
 left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

SKETCH OF REFERENCE TIES

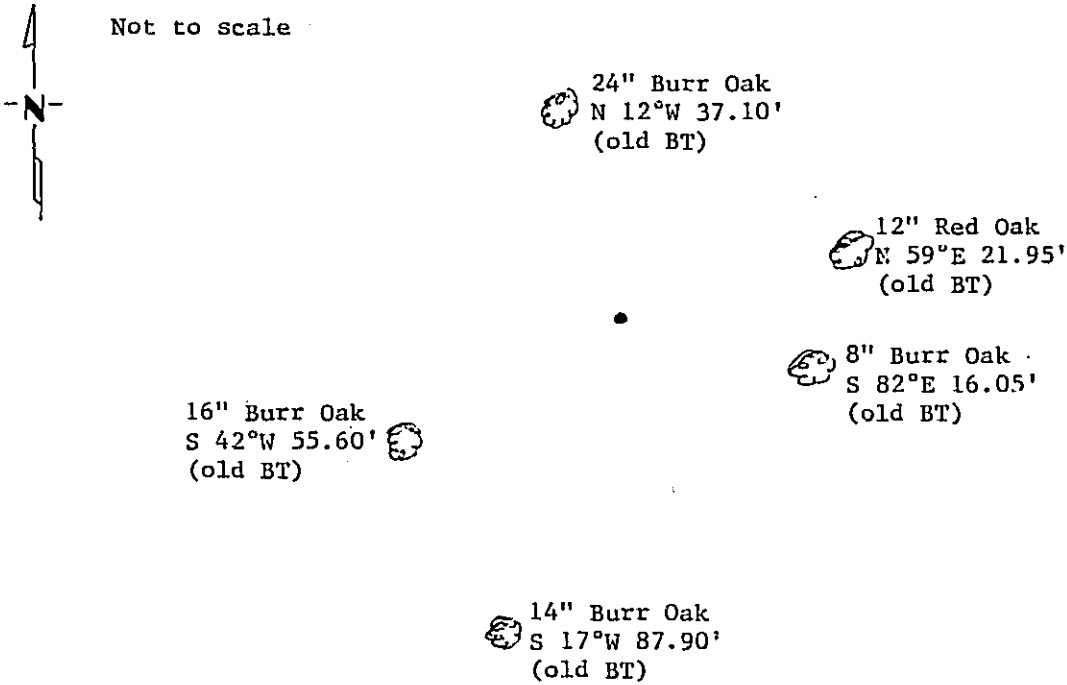

Trees double blazed, scribed, painted red and 54-3 Bearing Tree tag attached.
Measurement taken to nail in side of tree.

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Curo
SIGNATURE

12-26-87
DATE

Registration No. 11395

- Land Surveyor
 County Surveyor

302141

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:00 P.M. on the 16 day of January A.D., 1988.

County Recorder Claudia Kayler
By MS, Deputy

DOCUMENT NO. 302141

Statement of Evidence: Northeast Corner Section 28, T.141 N., R.31 W., 5th P.M.

- 1873 U.S. General Land Office survey set a wood post for this corner and marked the following bearing trees: 8" W.Pine S 39 W 25 lks., 12" W.Pine N 53 W 35 lks., 14" N.Pine N 34 E 11 lks., 20" W.Pine S 62 E 28 lks.
- 1921 County Survey Record Book "C", pages 447 and 467, show surveys by E.B.Horst. He found a 4x4x48" Oak stake, set from 3 stumps and one snag of the original BT's.
- 1942 County Survey Record Book "D", page 317, shows a survey by John Curo. He shows the following ties: 16" W.Oak N 8 E 36.75', 7" W.Birch S 55-20 E 15.75', 14" N.Pine S 46 W 46.95', 8" W.Oak N 88-34 W 47.50'
- 1959 Corner Certificate filed by Harold Curo, RLS #3417, shows he found a 4x4x36" wood stake that was replaced by a 2 3/4x60" I.P. filled with concrete and marked the following new bearing trees: 7" W.Oak S 82-32 E 15.80', 20" Red Oak N 13-32 W 36.90', 14" Elm S 38-16 W 55.70'
- 1961 Plat of Survey by Peter J. Meyer, RLS #3628, filed as Doc # 169486, shows corner and bearing trees as per the 1959 H.Curo corner certificate.
- 1980 USFS Technician, Jim Schoonover, found the 1959 monument and bearing trees in good condition. Two new BT's were marked and steel sign post set 4.2' South.
- 1982 Corner Certificate filed by Gary Stevenson, RLS #12684, shows he found the 1959 monument and ties and also the GLO pine stumps NW & NE and 1942 pine stump & birch. He also found the 2 new trees marked in 1980.
- 1987 On Oct. 20, the 1959 monument & ties and 1980 ties were found in good condition. I file this certificate to update the 1982 certificate.