

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter _____ Corner of Section 7, Township 134 N., Range 31 W., 5th P.M.

STATE OF MINNESOTA, County of CASS


At the corner location shown on the sketch:

On _____ found a _____
DATE

left monument as found, lowered monument, removed monument (explain)

On 10/16/86 placed a 2"x18" telespar monument with stamped aluminum cap
DATE
down 10" in centerline E-W road in line with old fence North and Field line S.

SKETCH OF REFERENCE TIES

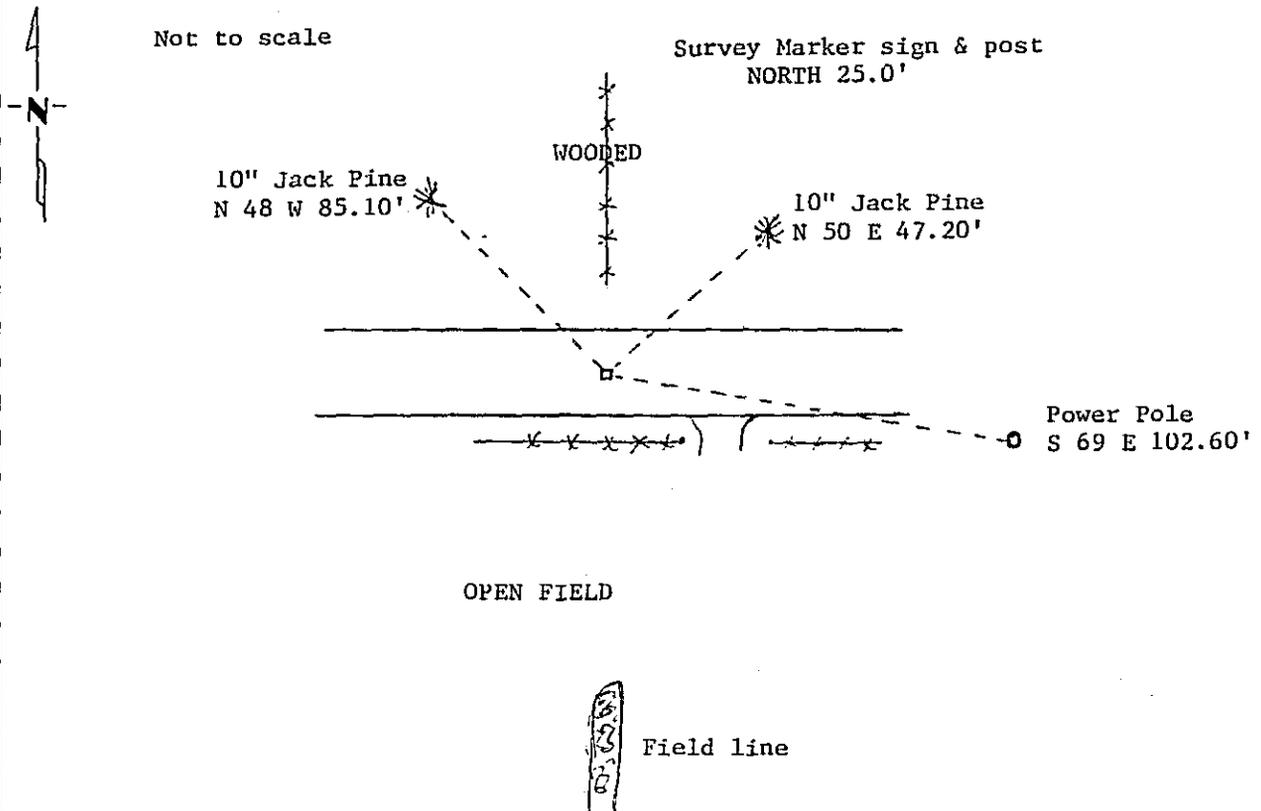

Statement of evidence relative to this corner location is on back of page. 309790

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walter E. Crow 1-9-89
SIGNATURE DATE

Registration No. 11395

- Land Surveyor
- County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:45 P. .M. on the 9 day of January A.D., 19 89

County Recorder Clondine Keyler
By mj, Deputy

DOCUMENT NO. 309790

Statement of Evidence: North Quarter Corner Section 7, T.134 N., R.31 W., 5th P.M.

- 1869 US General Land Office survey set a wood post for this corner and marked the following bearing trees: 4" Aspen N 70 W 37 lks., 5" Tam. S 30 W 49 lks.
- 1986 On Oct. 2, Terry Freeman, Cass County Survey Technician and Glen Williams, backhoe operator, dug in area of corner. At area of old fence N., dug 9'N-Sx 12'E-W and 2' deep. 1' top & fill, dug 1' into sand-sandy loam with gravel under. At location of split (approx. 20' W.) dug 8'N-Sx 10'E-W 1.5' deep. 6" top & fill and dug 1' into natural sand-sandy gravel. Found Nothing
- On Oct. 16, Terry Freeman and Jim Cripps & Norman Maunu, set a 2"x18" telespar monument with stamped aluminum cap in line with old fence North and Field line + 500' S. in field, in centerline of road, down 10". Marked BT's as shown on front and placed a Survey Marker sign on sign post NORTH 25.0'