

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTHEAST Corner of Section 17, Township 141N, Range 30W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

Latitude: 47° 02' 16.58816"
 Longitude: 94° 29' 31.53367"


On 6-23-88 found a 2" iron monument with brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

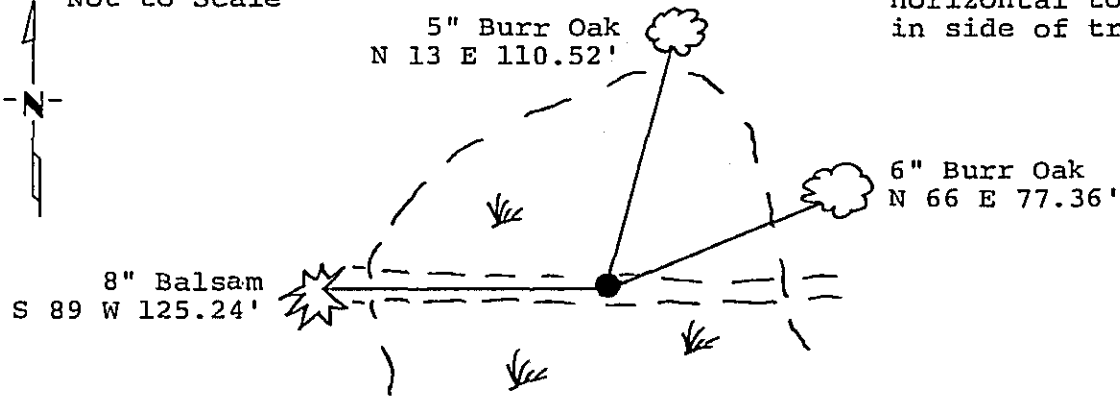

Monument is located
 in an old east-west trail
 in a Tamarack swamp
 Sing post S 6 E 6.60'
 Sign post N 45 W 6.65'

Monument Stamped

T 141 N R 30 W

S 8	S 9
S 17	S 16
1917	

All trees are painted with red enamel
 and marked with a 54-3 (Bearing Tree) tag.

Statement of evidence relative to this corner location is on back of page. 309835

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker
 Date 12-15-88 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:50 A. on the 12 day of January A.D., 1989

County Recorder Clairine Kayler

By MS, Deputy

DOCUMENT NO. 309835

Statement of Evidence:

Northeast Corner Section 17, Township 141 North,
Range 30 West, Cass County, Minnesota

J-9 141-30
Bk.5 Pg.5

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 14 inch Tamarack South 68 and 1/2 degrees East a distance of 37 links; a 12 inch Tamarack South 65 degrees West a distance of 72 links; a 13 inch Tamarack North 78 degrees West a distance of 17 links; and a 14 inch Tamarack North 19 degrees East a distance of 70 links.

1912 County Surveyor's Record Book C page 56 show survey by M.A. Kemp and he found a 4 inch by 4 inch by 48 inch post. The post was in a swamp and checked with the stumps of Government bearing trees.

1917 U.S. General Land Office dependant resurvey found the corner marked by the original Northeast, Southeast, and Southwest bearing trees and a wood stake. A 2 inch by 36 inch iron pipe with a marked brass cap was set 36 inches in the ground to mark the corner. The following bearing trees were marked: a 14 inch Red Oak North 53 and 1/2 degrees East a distance of 172 links; a 12 inch Tamarack South 64 and 1/2 degrees West a distance of 189 links; and a 12 inch Tamarack North 66 and 3/4 degrees West a distance of 96 links.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 23 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a 2 inch iron pipe with a brass cap monument up 8 inches in old East-West trail in a Tamarack swamp; and both 1917 Tamarack stumps at bearing and distance; and a 8 foot signpost South. Set a 8 foot steel sign post and sign 54-9 North 45 degrees West 6.65 feet. 3 new bearings were marked as shown on front of this certificate.