

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 29, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

Latitude: 47° 00' 29.716"

Longitude: 94° 22' 30.908"

On _____ found a _____
DATE



left monument as found, lowered monument, removed monument (explain)

On 7/26/88 placed a 2" x 48" iron monument with a brass cap
DATE

Magnetic Decl: 5° East
Not to Scale

SKETCH OF REFERENCE TIES

All distances are
horizontal to nail
in side of tree.

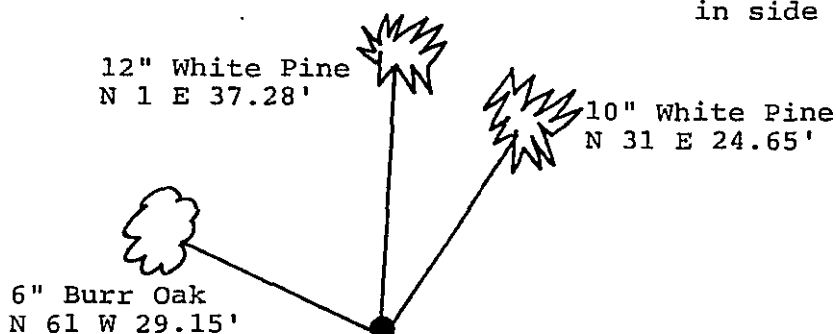

Monument is located
100' more or less
westerly of United
States Forest Service
Road #2111 in White
Pine stand

8' steel sign post North 5.0'

8' steel sign post West 5.0'

All trees are painted with red enamel and marked
with a 54-3 (Bearing Tree) tag.

Monument Stamped

T 141 N R 29 W
S 20

8' steel sign post
S 29
1988

RLS No. 17008

Statement of evidence relative to this corner location is on back of page.

310044

I hereby certify that this survey, plan or
report was prepared by me or under my
direct supervision and that I am a duly
Registered Land Surveyor under the laws
of the State of Minnesota.

David S. Landecker
David S. Landecker
Date 1-18-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in
the Co. Recorders office at 10:30 A .M. on the
25 day of January A.D., 1989

County Recorder Clouline Kayler

By MS, Deputy

DOCUMENT NO. 310044

Statement of Evidence:

North Quarter Corner Section 29, Township 141
North, Range 29 West, Cass County, Minnesota

R-7 141-29
Bk.6 Pg.5

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: an 8 inch Poplar North 21 degrees East a distance of 17 links; and a 20 inch White Pine South 18 degrees West a distance of 13 links.

1937 U.S. Forest Service records show the following: J.A. Ghelhaug, for tower survey, establishes corner at lost single proportion position between Northeast and Northwest Corners of said Section 29.

1964 U.S. Forest Service records show the following: found 1 and 1/2 inch pipe.

1981 U.S. Forest Service records show the following: found 1 and 1/2 inch pipe.

1984 County Surveyor's Record show survey by Freeman and Hummitzsch. They found 2 inch iron pipe and U.S. Forest Service corner tag; no original evidence.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 1 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a 1 and 1/2 inch iron pipe reported by others, South 7 and 1/2 degrees East a distance of 41.7 feet from the lost position as determined in the 1937 USFS survey by Ghelhaug. No evidence of original bearing trees. Mathematical comparisons using found monument in Section 20 as surveyed by Ghelhaug indicate this monument is not that as determined by Ghelhaug. This monument was not accepted as the quarter corner.

1988 on July 26 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap at single proportion position between the Northeast and the Northwest corners of Section 29. 3 bearing trees are shown on front of this certificate, two 8 foot steel sign posts are in place as noted.