

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

NORTH QUARTER Corner of Section 21, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 47° 01' 19.915"
 Longitude: 94° 21' 26.429"



On 6/28/88 found a 1" iron monument with a brass cap
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree

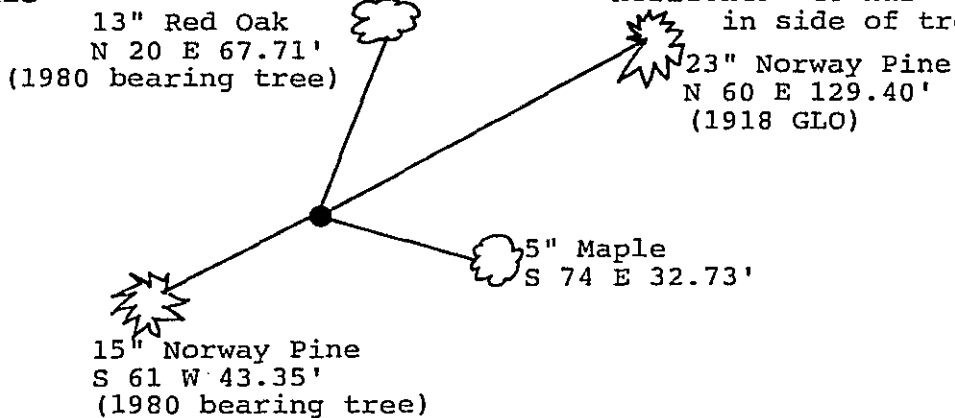

Monument is located off the southeast side of Hagen Lake (Approximately 200 feet) line to standard east and west
 8' sign post east 3.75'
 8' sign post west 3.60'
 All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Monument Stamped

1/2 --- S 16 / S 21 ---

1918

Statement of evidence relative to this corner location is on back of page.

310666

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota

David S. Landecker
 David S. Landecker

Date 2/28/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:20 P.M. on the 1 day of March A.D., 19 89

County Recorder Claudia Kayler
 By MS, Deputy

DOCUMENT NO. 310666

Statement of Evidence:

North Quarter Corner Section 21, Township 141
North, Range 29 West, Cass County, Minnesota

N-11 141-29
Bk.4 Pg.41

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 20 inch Yellow Pine North 39 degrees East a distance of 32 links; and an 18 inch Yellow Pine South 34 degrees West a distance of 35 links.

1918 U.S. General Land Office dependant resurvey found the corner marked by the stump of the original Northeast bearing tree. A 1 inch by 36 inch iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: a 5 inch Norway Pine North 89 degrees 39 minutes East a distance of 203 links; and a 10 inch Red Oak North 59 degrees 45 minutes East a distance of 196 links.

1980 and 1982 U.S. Forest Service records show the following: found a General Land Office brass cap monument and remains of 1873 bearing tree stump to Northeast, a 22 inch Norway Pine North 60 degrees East (1918 GLO) and stump hole of 1918 GLO Oak North 89 degrees East. Notes indicate that the 1918 GLO notes apparently reversed the bearings and distances on their tie trees. New bearing trees marked: a 12 inch Red Oak North 20 degrees East a distance of 67.71 feet; a 12 inch Red Oak North 31 degrees West a distance of 7.36 feet; and a 14 inch Norway Pine South 61 degrees West a distance of 43.32 feet; set 8 foot steel sign posts East 3.75 feet and West 3.60 feet.

1982 Gary Stevenson, Registered Land Suveyor Number 12684, filed Corner Certificate, using the 1980 and 1982 USFS information.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 28 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: a 1 inch General Land Office brass cap monument located approximately 200 feet southeast of Hagen Lake. 1918 General Land Office Norway Pine now a 23 inch Norway Pine North 60 degrees East a distance of 129.4 feet; 1980 Oak now a 13 inch Red Oak North 20 degrees East a distance of 67.71 feet; and the 1980 Norway Pine now a 15 inch Norway Pine South 61 degrees West a distance of 43.35 feet. One new bearing tree was marked and steel sign posts inplace as shown on front of this certificate.