

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter _____ Corner of Section 32, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:


Latitude: 46° 59' 39.074"
 Longitude: 94° 30' 08.564"

- On _____ found a _____
DATE
- left monument as found, lowered monument, removed monument (explain)
- On 10/3/88 placed a 10 foot aluminum rod with an aluminum cap.
DATE
 (Aluminum rod is 3/4" diameter)

Magnetic Decl: 5° East
 Not to Scale

SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree.

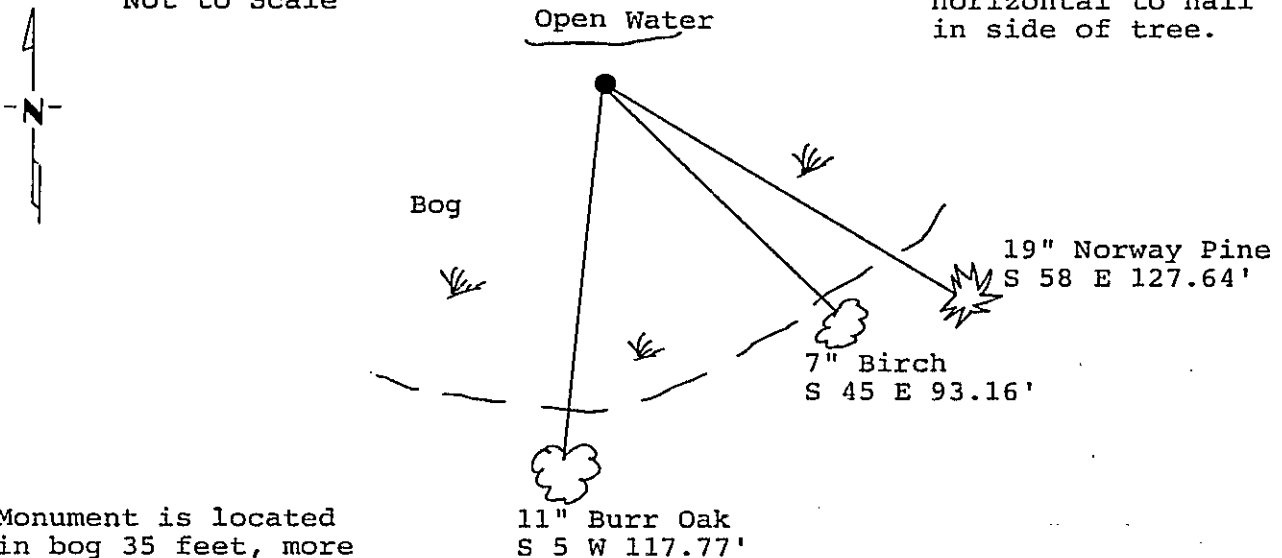

Monument is located in bog 35 feet, more or less, south of small pond and 97 feet, more or less, north of southerly edge of bog.

8' Sign post North 2.0'

Monument Stamped
 T 141 N R 30 W
~~S29~~
 S32
 1988
 RLS 17008

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

310882

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker

 David S. Landecker

Date 3/20/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 4:00 P. M. on the 14 day of March A.D., 1989

County Recorder Clondine Kayler

By MS, Deputy

DOCUMENT NO. 310882

Statement of Evidence North Quarter Corner Section 32, Township 141
North, Range 30 West, Cass County, Minnesota

V-7 141-30
Bk.5 Pg.28

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 5 inch Tamarack North 5 and 1/2 degrees West a distance of 15 links; and a 18 inch Tamarack South 3 degrees West a distance of 35 links.

1920 County Surveyor's Record Book C page 466 show survey by E.B. Horst for Section 30 same Township. Notes state that he found the original corner post. His survey of Section 30 uses this corner to determine corners in Section 30.

1922 County Surveyor's Record, resurvey plat in cabinet E, Number 38, in the Cass County Recorder's Office, show survey by E.B. Horst. He found monument and Government bearing trees as found previously.

1937 Civilian Conservation Corps found 3 inch square Tamarack post and rotten Tamarack stump North 4 degrees West a distance of 15 links with scribe marks showing. Forest Service Location Poster on 5 inch Ash South 46 degrees West a distance of 19 links was set.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on July 29 and August 1 a Landecker-Stevenson & Associates crew searched for the corner. No evidence found of the original bearing trees, the iron monument, or the Civilian Conservation Corps Location Poster.

1988 on October 3 a Landecker-Stevenson & Associates crew set a 10 foot aluminum rod with stamped aluminum cap at the obliterated position reestablished from monuments recovered on the South line of Section 30 as established by Horst in his survey noted above. New bearing trees were marked as shown and a steel sign post is in place as noted on front of this certificate.