

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

INDIAN RESERVATION
MILE POST 2

Corner of Section 36, Township 141N, Range 28W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 46° 59' 05.999"
Longitude: 94° 10' 12.042"


On 6-13-88 found a 1" iron monument with brass cap (GLO)
DATE

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to Scale

All distances are horizontal to nail in side of tree.

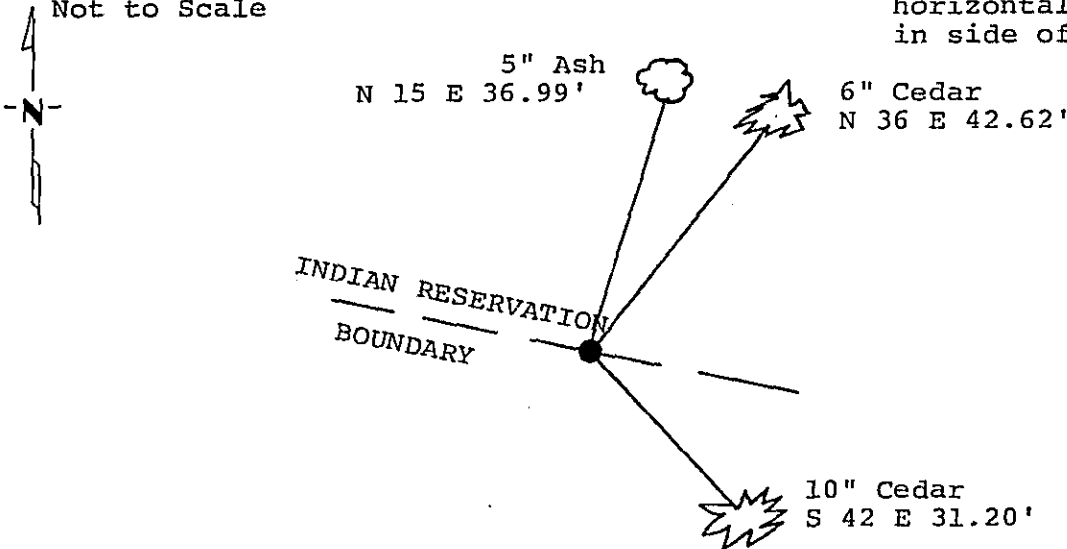

Monument is located in Ash & Cedar Swamp 100' more or less south of Highland Ridge

Sign post S 80 E 7.40'
Sign post N 80 W 4.70'

All trees are painted with red enamel and marked with a 54-3 (Bearing Tree) tag.

Monument Stamped

CIR
2M
T 141 N
R 28 W
S 36
1918

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
David S. Landecker
Date 3/31/89 Registration No. 17008

311166

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 11:40 A.M. on the 3rd day of April A.D., 1989

County Recorder Claudine Kaylor
By Bjk, Deputy

DOCUMENT NO. 311166

Statement of Evidence:

Mile Post Number 2
South Boundary of Leech Lake
Indian-Reservation
in Section 36, Township 141
North, Range 28 West

X/Y 22-23 141-28
Bk.7 Pg.11

1873 P.H. Conger, U.S. Deputy Surveyor originally established this mile post position while running the South boundary of the Leech Lake Indian Reservation. He marked a 7 inch Tamarack for corner and the following witness: an 8 inch Tamarack North 38 degrees West a distance of 13 links.

1919 U.S. General Land Office dependant resurvey found the corner marked by a 10 inch diameter Spruce stub 6 feet high with markings for corner. A 1 inch by 36 inch iron pipe with a marked brass cap was set to mark the corner. The following bearing trees were marked: a 6 inch Cedar South 33 degrees 30 minutes East a distance of 15 links; and a 6 inch Cedar North 70 degrees East a distance of 11 links.

1982 Walt E. Curo, Registered Land Surveyor Number 11395, filed corner certificate on the corner on the North-South Quarter line of Section 36 and the South line of the reservation. He shows a distance and bearing from that corner to this 2 mile post.

1986 U.S. Forest Service records show the following: with Cass County Survey Technician, found 1919 General Land Office brass cap monument and remains of both bearing trees.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on June 13 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: the 1919 General Land Office 1 inch brass cap monument and stump of 1919 bearing tree North 72 degrees East with spike. New bearing trees were marked as shown and steel sign posts are in place as noted on front of this certificate.