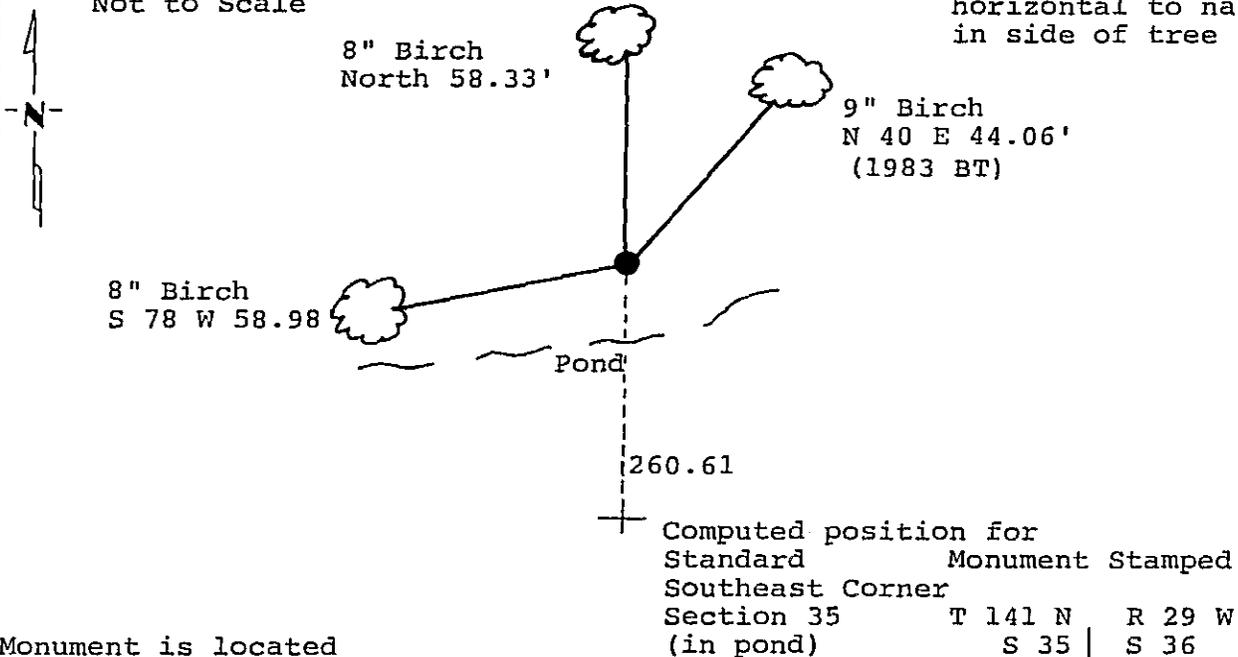


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

REFERENCE FOR

SOUTHEAST Corner of Section 35, Township 141 N, Range 29 W, 5th P.M.STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

Latitude: $46^{\circ} 58' 48.141''$ Longitude: $94^{\circ} 18' 09.061''$ On 6/22/88 found a 2" iron monument with a brass cap
DATE left monument as found, lowered monument, removed monument (explain) On _____ placed a _____
DATEMagnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to ScaleAll distances are
horizontal to nail
in side of tree

Monument is located
10' more or less north
of waters edge of small
pond
line to standard northerly
sign post south 2.4'

All trees are painted
with red enamel and
marked with a 54-3
(Bearing Tree) tag.

WC
1982
RLS 12684

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or
report was prepared by me or under my
direct supervision and that I am a duly
Registered Land Surveyor under the laws
of the State of Minnesota.

David S. Landecker
David S. Landecker

Date 3/31/89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in
the Co. Recorders office at 12:40 P.M. on the
3rd day of April A.D., 1989

County Recorder Claudine Kayser
By DJK, Deputy

DOCUMENT NO. 31178

Statement of Evidence:

Reference Corner to Southeast Corner Section
35, Township 141 North, Range 29 West, Cass
County, Minnesota

Y-Z 21 141-29
Bk.6 Pg.13

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established a Witness Corner to this corner while running the 10th Standard Parallel. The notes indicate that the corner fell in a pond and a Witness Corner was established 4.51 chains to the West.

1983 Gary Stevenson, under Forest Service contract, ran line from the Northeast corner of Section 35 to a point reestablished in the pond for the Southeast corner of Section 35. He set a 2 by 36 inch iron pipe with 3 inch brass cap 260.61 feet northerly of the said reestablished corner as a reference to the corner. He set an 8 foot sign post South 2.6 feet and marked the following bearing trees: an 8 inch Birch North 26 degrees East a distance of 44.13 feet; and a 10 inch White Oak South 62 degrees West a distance of 26.36 feet. A corner certificate was filed on December 3, 1984 with the Cass County Recorder as document Number 279158.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner. The 1983 Oak bearing tree was cut off.

1988 on June 22 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: brass cap monument set by Stevenson and 1983 Birch bearing tree now 9 inches. Two new bearing trees were marked and a steel sign post is in place as noted on front of this certificate.