

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 36, Township 141N, Range 30W, 5th P.M.

STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch: Latitude: 46° 59' 13.069"  
 Longitude: 94° 24' 26.172"



On 5-19-88 found a 2" iron monument with brass cap (USFS)  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On \_\_\_\_\_ placed a \_\_\_\_\_  
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree.

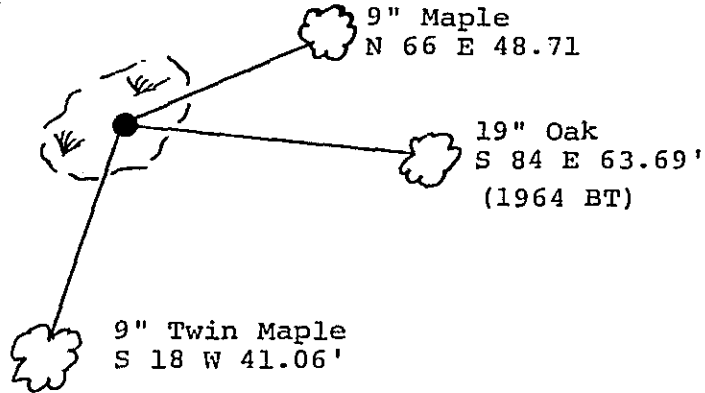

Monument is located in a small ash and brush swamp.  
 Sign post south 4.0'  
 Sign post north 25.8'

Monument Stamped

T 141 N  
 R 30 W R 29 W  
 1/4

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

S 36 | S 31  
 1965  
 R.L.S. No. 6807

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker  
 David S. Landecker  
 Date 5/7/89 Registration No. 17008

311185  
 OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 1:15 P. M. on the 3rd day of April A.D., 1989

County Recorder Claudine Kayler  
 By dyk, Deputy  
 DOCUMENT NO. 311185

Statement of Evidence:

East Quarter Corner Section 36, Township 141  
North, Range 30 West, Cass County, Minnesota

X-25 141-30  
Bk.4 Pg.9

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while running the East township line of Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witness: a 12 inch Poplar North 10 degrees West a distance of 38 links.

1964 U.S. Forest Service found a 2 inch capped County iron in place, set an iron pipe with a marked brass cap to mark this corner and marked the following witnesses: a 5 inch Maple North 24 degrees East a distance of 18.2 feet; a 17 inch Oak South 84 degrees East a distance of 64.0 feet; a 5 inch Maple South 19 degrees East a distance of 41.5 feet; and a 5 inch Maple South 19 degrees East a distance of 41.5 feet.

1971 U.S. Forest Service Surveyor Bill Okerman, Licensed Land Surveyor Number 6807, filed corner certificate on February 19, with the Cass County Recorder as certificate Number 627, using 1964 information.

1986 U.S. Forest Service crews set an aerial target over this corner position for determination of coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner. Both 1965 Maple bearing trees were cut off.

1988 on May 19 a Landecker-Stevenson & Associates crew visited the corner and found the following evidence: Forest Service brass cap and 2 inch County iron and 1964 Oak bearing tree in good condition as shown on front of this certificate. New bearing trees were marked as shown and steel sign posts are in place as noted on front of this certificate.