

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Standard Southeast Corner of Section 31, Township 141 N, Range 30 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch: Latitude: 46° 58' 46.550"
 Longitude: 94° 30' 47.001"


On 8/25/88 found a remains of Government Bearing Trees and charred post, replace with Brass Cap Monument.

left monument as found, lowered monument, removed monument (explain)

On 8/30/88 placed a 2 inch by 54 inch Iron Monument with Brass Cap.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
 Not to Scale

All distances are horizontal to nail in side of tree.

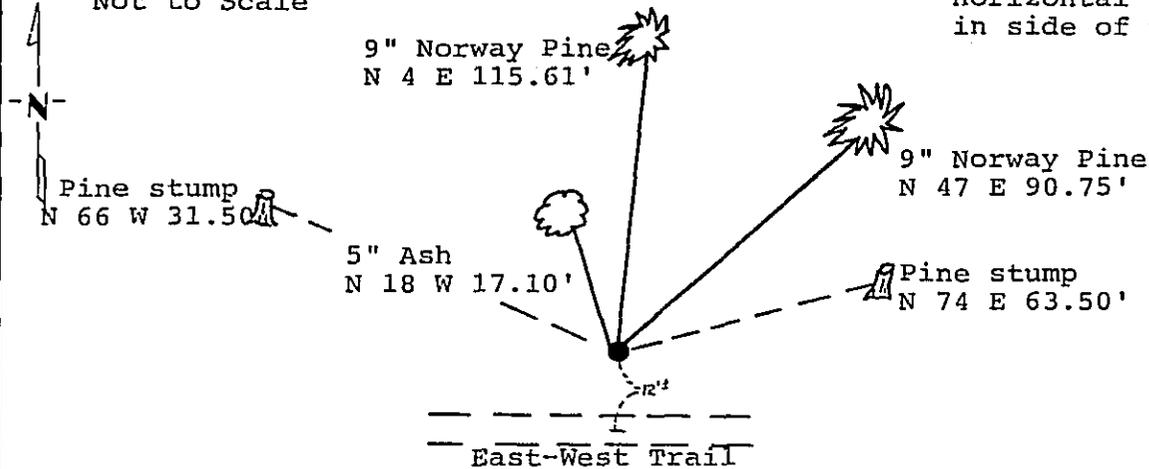

Monument is located 12 feet, more or less, Northerly of centerline of East-West Trail and 85 feet, more or less, Southerly of Norway Pine plantation. 8 foot sign post East 5.0 feet.

Monument Stamped

T 141 N R 30 W
 SC
S 31 | S 32
 S6
 T 140 N
 1988

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

RLS No. 17008

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

David S. Landecker
 David S. Landecker

Date 3/31/89 Registration No. 17008

311186

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 1:20 P .M. on the 3rd day of April A.D., 1989

County Recorder Clairine Kaylor

By Bjk, Deputy

DOCUMENT NO. 311186

Statement of Evidence:

Standard Southeast Corner Section 31, Township
141 North, Range 30 West, Cass County, Minnesota

Z-5 141-30
Bk.5 Pg.73

1863 Johnson and Thornton, U.S. Deputy Surveyors, originally established this corner position while running the 10th Standard Parallel. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 20 inch White Pine North 67 degrees West a distance of 58 links; and a 22 inch Pine stub North 60 degrees East a distance of 96 links.

1923 County resurvey plat in the Cass County Recorder's Office shows a survey by John Greene. He does a survey in Section 6, Township 140 North, Range 30 West. In this survey, the North line of Section 6 and the South line of Section 31 and 32, Township 141 North, Range 30 West, are shown. In their survey they do not indicate or find this corner. Their measurements and proportions come from the found monument at the Southeast corner of Section 32.

1921 State Highway Department Right of Way Map, in Cass County Recorder Office, information shows: corner is 1962.6 feet East of proposed centerline (railroad land tie).

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 on August 25 a Landecker-Stevenson & Associates crew searched for the corner. The following information was found and noted: remains of squared burnt post in ground 8 inches to 10 inches of up-down wood and some laying down. Post remains fit well with pine stump remains: North 66 degrees West a distance of 31.50 feet and North 74 degrees East a distance of 63.50 feet. It is determined that this is the true original corner position.

1988 on August 30 a Landecker-Stevenson & Associates crew set a 2 inch by 54 inch iron pipe with a brass cap in place of the found post. New bearing trees were marked as shown and a steel sign post was set as noted on front of this certificate.