

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter \_\_\_\_\_ Corner of Section 28, Township 141 N, Range 29 W, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:      Latitude: 47° 00' 30.984"  
 Longitude: 94° 21' 26.475"


On \_\_\_\_\_ found a \_\_\_\_\_  
DATE

left monument as found,  lowered monument,  removed monument (explain)

On 3/6/89 placed a 2 inch by 48 inch iron pipe with brass cap  
DATE  
and plastic base with magnet.

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES  
 Not to Scale

All distances are horizontal to nail in side of tree.

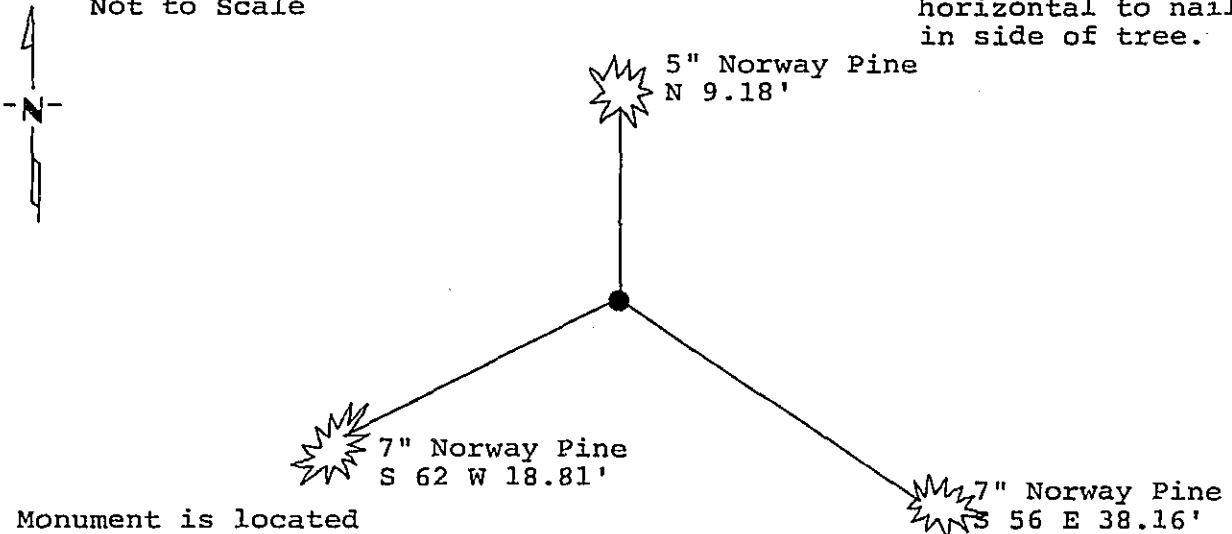

Monument is located  
 200'± Southerly of  
 Forest Service Trail  
 Number 2812 in mixed  
 hardwoods and Norway Pine.

8' steel sign post North 4.6'

All trees are painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page.

312363

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota

David S. Landecker  
 David S. Landecker  
 Date 5-24-89 Registration No. 17008

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 10:15 A.M. on the 25 day of May A.D., 1989

County Recorder Claudine Kaylor  
 By MS, Deputy

DOCUMENT NO. 312363

Statement of Evidence:

North Quarter Corner Section 28, Township 141  
North, Range 29 West, Cass County, Minnesota

R-11 141-29  
Bk.6 Pg.8

1873 P. H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 29 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 30 inch White Pine North 30 degrees East a distance of 24 links; and a 12 inch White Pine South 28 degrees East a distance of 20 links.

1964 U.S. Forest Service records show the following: technician Ekstrom chained from the North Quarter of 29 and the Northeast of 28 to area and found no evidence.

1986 U.S. Forest Service crews set an aerial target in the vicinity of this corner for the search and establishment of the true corner position. The target having coordinate values through the use of GPS on the Chippewa South Boundary Project Cadastral Survey U.S. Project Number 53-6392-8-219. This target allowed for the search and location of this corner.

1988 and 1989 a Landecker-Stevenson & Associates crew searched for the corner in numerous locations based on patterns as determined using section lines to the North. The search area extended approximately 300 feet South of corner monumented. The following information was found and noted: no evidence of original bearing trees or accessories.

1989 on March 6 a Landecker-Stevenson & Associates crew set a 2 inch by 48 inch iron pipe with brass cap and plastic base with magnet at the lost, single proportion position between the Northwest and Northeast corners of Section 28. New bearing trees were marked as shown and a steel sign post was set as noted on front of this certificate.