

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

North Quarter Corner of Section 14, Township 143, Range 30, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:


On 11/17/89 found a 1" GLO iron pipe with brass cap and 1924 Elm bearing tree Northeast, now dead.

left monument as found, lowered monument, removed monument (explain)

On _____ placed a _____

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES
Not to Scale

All distances are horizontal to nail in side of tree.

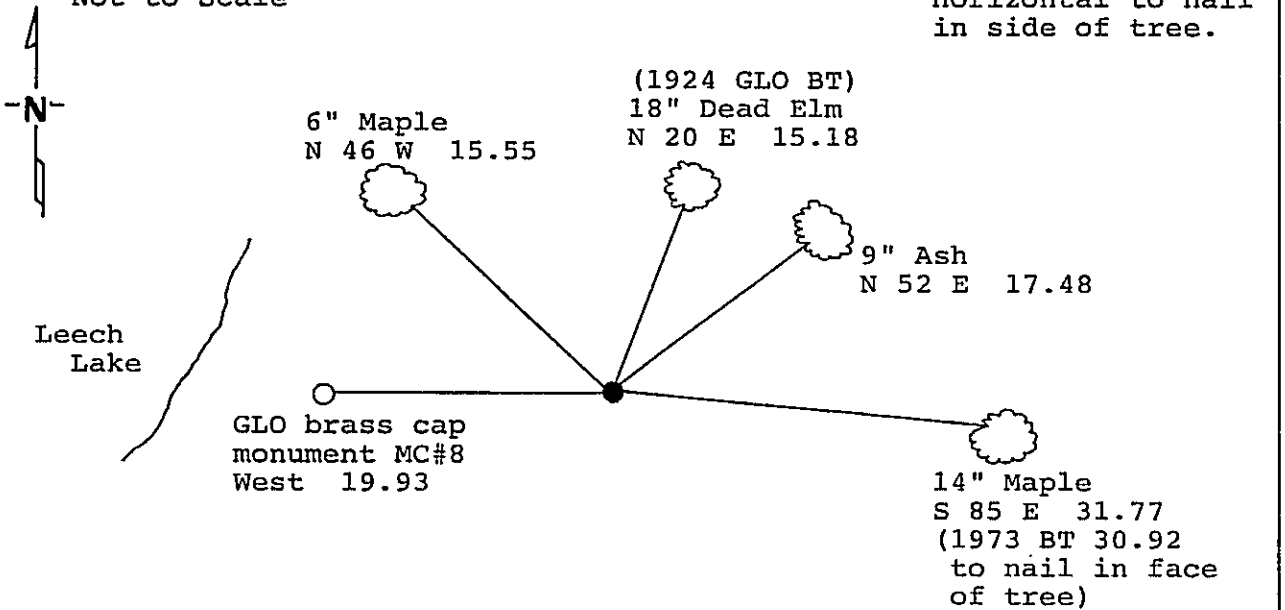

Monument Stamped

$\frac{1}{4}$ S 11
S 14
1924

Monument is 38'± easterly of Leech Lake.
7' Steel sign post East 3.0'

Statement of evidence relative to this corner location is on back of page. 317229

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

David A. Lusk 11/29/89
SIGNATURE DATE

Registration No. 17008

- Land Surveyor, Professional Engineer
- County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS

County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 3:45 P.M. on the 7 day of Dec. A.D., 1989

Register of Deeds Claudine Kayler

By ms, Deputy

DOCUMENT NO. 317229

North Quarter Corner, Section 14, Township 143
North, Range 30 West, Cass County, Minnesota

- 1875 B.C. Baldwin, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 143 North, Range 30 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 12 inch Sugar South 48 degrees West a distance of 86 links; and a 12 inch Sugar North 40 degrees West a distance of 32 links.
- 1924 U.S. General Land Office dependent resurvey found no evidence of the original survey. They set a 1 inch by 36 inch iron pipe 28 inches in the ground with a marked brass cap at the recorded position. The following bearing trees were marked: an 8 inch Elm North 20 degrees 45 minutes East a distance of 23 links; and a 6 inch Ash South 68 degrees 15 minutes West a distance of 33 links.
- 1973 R.F. Schneider, Registered Land Surveyor Number 5740, found the General Land Office brass cap monument in place. Distance East to Witness Corner to Meander Corner is 2012.19 as compared to the 1924 General Land Office distance of 2014.98. He marked the following bearing trees: a 12 inch Maple South 85 degrees East a distance of 30.92 feet; a 14 inch Elm North 15 degrees East a distance of 14.20 feet; and a 12 inch Elm South 10 degrees East a distance of 4.50 feet.
- 1989 On November 17, a Landecker-Stevenson & Associates, Inc., survey crew visited the corner and found the following evidence: a 1 inch General Land Office brass capped monument up 8 inches in good condition; the 1973 Schneider Elm bearing tree Northeast is the 1924 General Land Office 8 inch Elm North 20 degrees East and is dead; the 1973 Schneider Maple Southeast is now a 14 inch Maple (1973 measurement was to nail in face, we put nail in side of tree). New bearing trees were marked as noted and a steel sign post was set as shown on front of this certificate.