

# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


Northeast Corner of Section 11, Township 143N, Range 26W, 5th P.M.  
 STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On \_\_\_\_\_ found a \_\_\_\_\_  
DATE
- left monument as found,  lowered monument,  removed monument (explain)
- On 3-21-1990 placed a 2" X 48" brass capped monument  
DATE

Monument Marked

SKETCH OF REFERENCE TIES  
not to scale

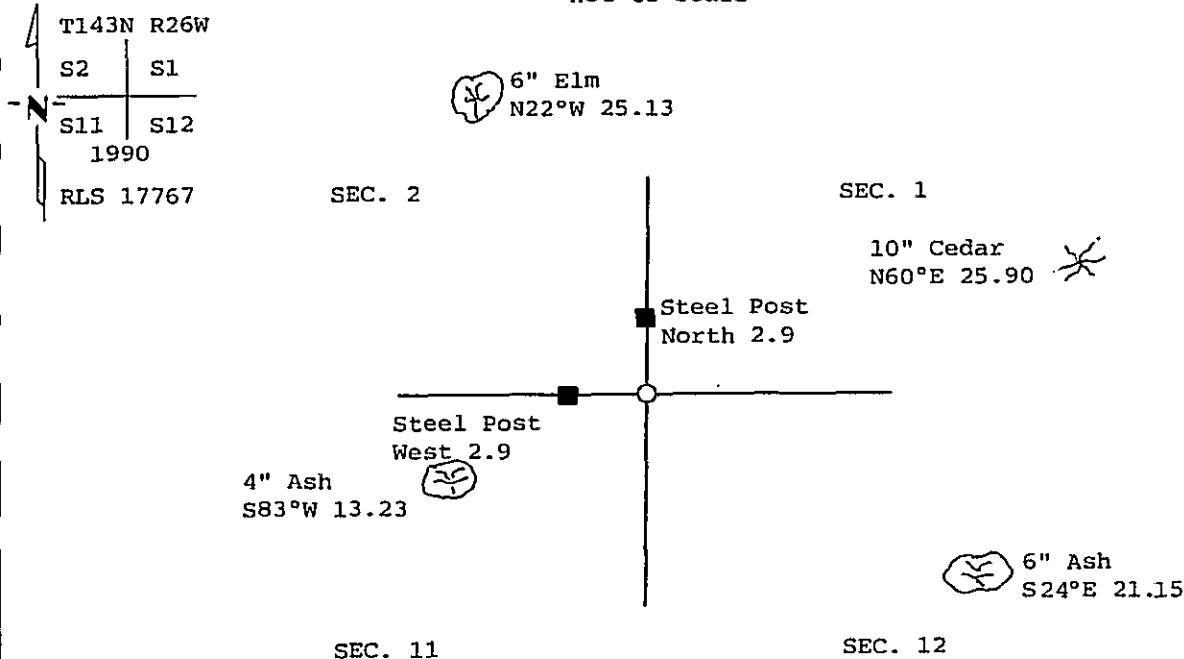

bearings are true

All trees are scribed, painted with a 30d spike in side and USFS 54-3 tag.

Statement of evidence relative to this corner location is on back of page.

323150

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

William C. Rapp  
 Date 8/22/90 Registration No. 17767

OFFICE OF THE COUNTY RECORDER  
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 3:09 P. .M. on the 28 day of August A.D., 19 90  
 County Recorder Claudia Keyser  
 By MS, Deputy  
 DOCUMENT NO. 323150

Statement of Evidence:

E21 Northeast corner section 11

Cor. 1,2,11 and 12 (NE Cor. Sec. 11)

- 1872 U.S. General Land Office survey set wood post for corner, the following references were noted:  
Spruce 10" S 45 degrees W, 6 Links ( 3.96 feet)  
Cedar 8" S 21 degrees E, 25 Links (16.50 feet)  
Tamarack 5" N 36 degrees E, 30 Links (19.80 feet)  
Spruce 7" N 12 degrees W, 40 Links (26.40 feet)
- 1916 J.H. Flynn, Cass County Surveyor, Cass County Book C, Page 172, Survey Record No. 413, states corner in place, no mention of BT's.
- 9-24-1969 Curt Krause, USFS, chained to area from 1/4 corner to East, he found nothing at this position.
- 11-6-1989 Personnel from Kovanen & Osufsen Inc. search area, found no evidence.
- 3-21-1990 Personnel from Kovanen & Osufsen Inc. set a 2" x 48" brass capped monument by doubling the distance and projecting line northerly from the southeast corner of section 11 and the east quarter corner section 11, as per recovered James H. Flynn, 1916 positions, Cass County Book C, Page 172, Survey Record No. 413, and establish the following witnesses:  
Cedar 10" N 60 degrees E, 25.90 feet  
Elm 6" N 22 degrees W, 25.13 feet  
Ash 4" S 83 degrees W, 13.23 feet  
Ash 6" S 24 degrees E, 21.15 feet  
8' long steel sign post with sign attached, West 2.9 feet  
8' long steel sign post with sign attached, North 2.9 feet

This position is traceable to the original GLO corner.