

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


EAST QUARTER Corner of Section 6, Township 145, Range 31, 5th P.M.
 STATE OF MINNESOTA, County of CASS

At the corner location shown on the sketch:

- On 1988 found a 2" CAPPED PIPE IN CENTER OF CO. RD., WHICH WAS DESTROYED IN ROAD CONSTRUCTION
DATE
 left monument as found, lowered monument, removed monument (explain)
- On 8-28-90 placed a 2"x 2"x 6" TELESAR MONUMENT WITH ALUMINUM CAP FLUSH WITH BLACKTOP
DATE

NOT TO SCALE

SKETCH OF REFERENCE TIES

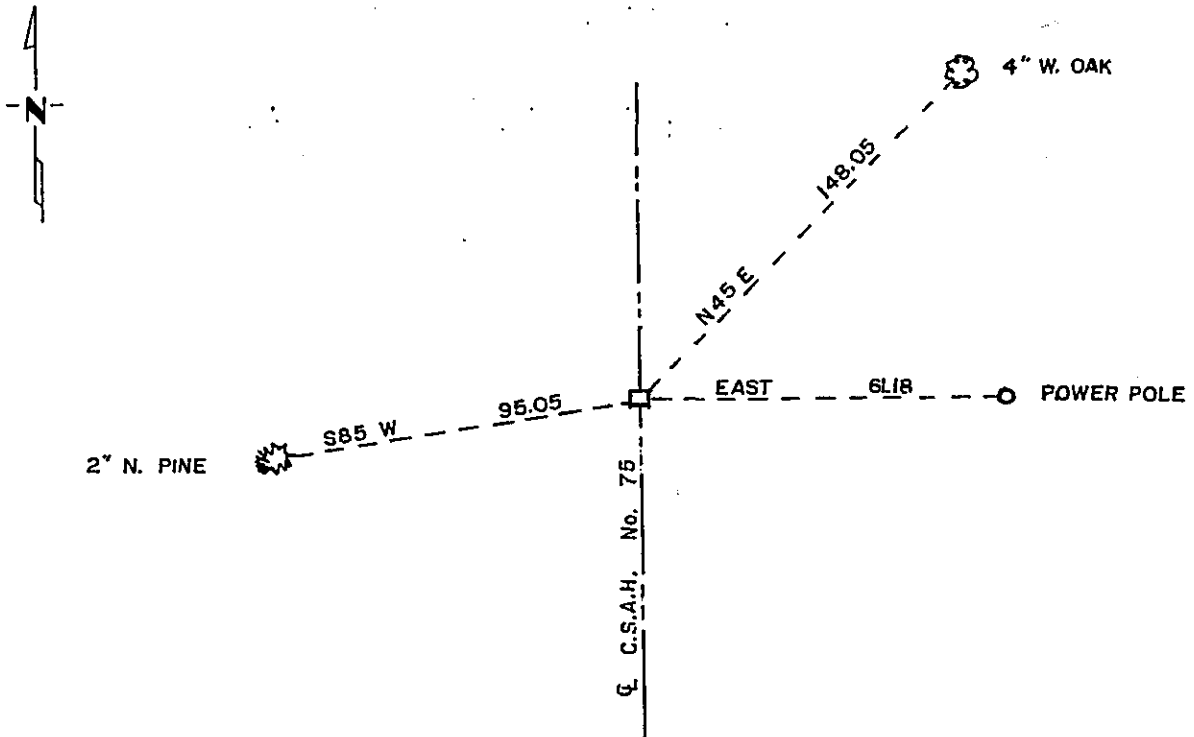

DIST. TO SPK. IN SIDE OF TREE

Statement of evidence relative to this corner location is on back of page. 325741

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

Walt E. Cass 12-20-90
SIGNATURE DATE

Registration No. 11395
 Land Surveyor
 County Surveyor

OFFICE OF THE COUNTY RECORDER

County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:50 P. M. on the 21 day of December A.D., 1990

County Recorder Clondine Kayler
 By m), Deputy

DOCUMENT NO. 325741

Statement of Evidence:

C 5 E $\frac{1}{4}$ corner of Sec. 6, Twp. 145, Rge. 31

1875: Original survey set a wood post and marked BT's as follows:

N. Pine 16" N 38 E 35 lks.

J. Pine 8" S 74 W 135 lks.

1915: John Curo set a 1 $\frac{1}{2}$ x 48" iron monument. recorded in County Resurvey Plat File E-67.

1915: Molyneux found monument set by John Curo.

1988: Cass County Hwy. Dept. survey crew found a 2" iron with cap. This monument destroyed in road construction.

1990: Walt Curo and Cass County Hwy. Dept. survey crew reset this corner with a 2" x 2" x 6" telespar monument with aluminum cap flush with blacktop. Marked new BT's as shown on front.