

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

West Quarter _____ Corner of Section 19, Township 142, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On 12/31/90 found a wood post with nail as set by USFS from
original ^{DATE} bearing trees
 - left monument as found, lowered monument, removed monument (explain)
- On 2/1/91 placed a 2 inch by 48 inch iron pipe with brass cap
and 8 ^{DATE} foot steel sign post along side to stabilize

Magnetic Decl: 5° East
Not to Scale

SKETCH OF REFERENCE TIES


All distances are horizontal to nail in side of tree



Monument is located in Tamarack swamp, 85'± northerly of the southerly edge and 150'± westerly of the easterly edge.

8' steel sign post northerly 3.0'.
8' steel sign post southerly 3.0'.

All trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

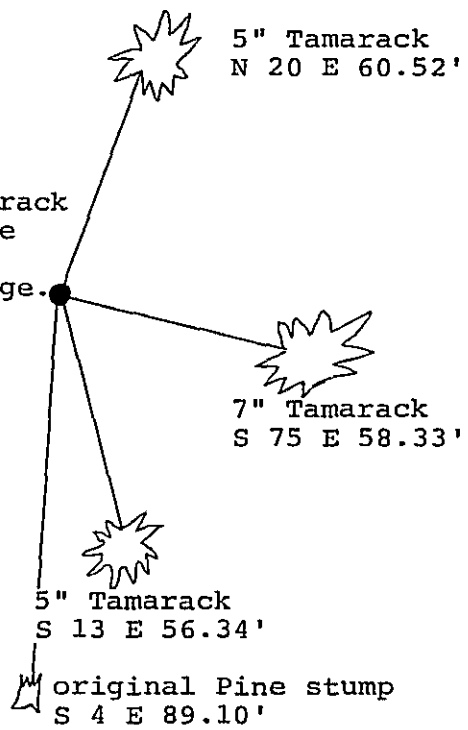

Monument Stamped
T142N
R32W, R31W
S24²S19
1991
RLS 17008

Statement of evidence relative to this corner location is on back of page. 327272

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

William D. Lindh 3/16/91
SIGNATURE DATE

Registration No. 17008

Land Surveyor, Professional Engineer

County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:45 P..M. on the 11 day of March A.D., 19 91

Register of Deeds *Claudia Kayler*
By *M.J.*, Deputy

DOCUMENT NO. 327272

West Quarter corner, Section 19, Township 142 North,
Range 31 West, Cass County, Minnesota

P-1 142-31

1871 George Stuntz, U.S. Deputy Surveyor, originally established this corner position while running the West line of Township 142 North, Range 31 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 5 inch Tamarack South 3 degrees West a distance of 52 links; and a 30 inch White Pine South 4 degrees East a distance of 135 links.

1921 Cass County Surveyor's Record Book C, page 472 shows survey by E.B. Horst. He found the original Southeast bearing tree stump with blazed side burned out. The notes say part of blaze with scribing is standing inside of stump.

1921 County resurvey in County Recorder's Office file cabinet E number 59 shows survey by E.B. Horst. A 2 inch by 48 inch iron monument was set.

1987 and 1988 United States Forest Service personnel search for corner and traverse West line of the township. They find the remains of White Pine bearing tree on south edge of swamp with scribe and chop marks visible. Set post and nail in swamp for corner from White Pine stump. No evidence found of County iron.

1990-1991 Landecker & Associates, Inc. review search and traverse notes of USFS. They accept the White Pine stump as found by the USFS as establishing position for obliterated corner. They locate the wood post with nail as set by USFS in 1988 and the original Pine stump at bearing and distance while traversing the West line of township. On February 1, 1991 the survey crew set a 2 inch by 48 inch iron pipe with brass cap and 8 foot steel sign post as a stabilizer. New bearing trees were marked as shown and steel sign posts set as noted on front of this certificate. The computed 1921 Horst position is approximately North 49 degrees West a distance of 306 feet from the monumented position.