

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


West Quarter _____ Corner of Section 30, Township 142, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 1/8/91 found a 60 d spike set by USFS from stumps of both original bearing trees
DATE
 left monument as found, lowered monument, removed monument (explain)
- On 2/2/91 placed a 2 inch by 48 inch iron pipe with brass cap up 18 inches (on large rock)
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES All distances are horizontal to nail in side of tree
 Not to Scale

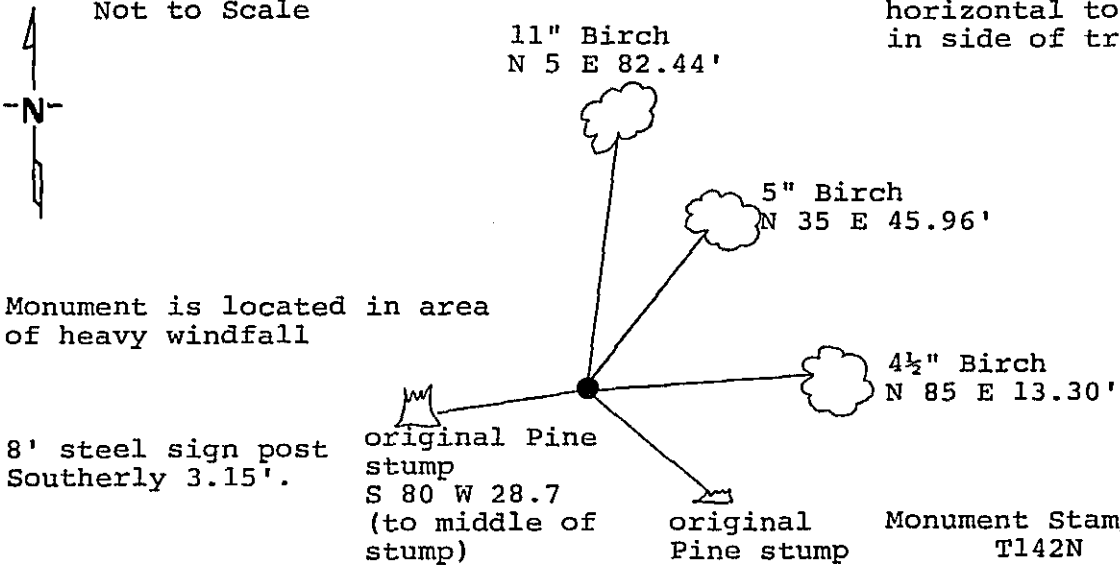

Monument is located in area of heavy windfall

8' steel sign post Southerly 3.15'.

original Pine stump
 S 80° W 28.7
 (to middle of stump)

original Pine stump

Monument Stamped
 T142N
 R32W R31W
 S25¹/₂S30
 1991
 RLS 17008

All trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 327274

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

[Signature] 3/6/91
SIGNATURE DATE

Registration No. 17008
 Land Surveyor, Professional Engineer
 County Surveyor, County Engineer

OFFICE OF THE REGISTER OF DEEDS
 County of Cass

I hereby certify that this document was filed in the Reg. of Deeds office at 2:55 P. .M. on the 11 day of March A.D., 1991
 Register of Deeds Clodine K. [Signature]
 By MS, Deputy
 DOCUMENT NO. 327274

West Quarter corner, Section 30, Township 142 North,
Range 31 West, Cass County, Minnesota

T-1 142-31

1871 George Stuntz, U.S. Deputy Surveyor, originally established this corner position while running the West line of Township 142 North, Range 31 West. The notes indicate a wood post was set to mark the corner position and the following witnesses: a 20 inch Yellow Pine South 80 degrees West a distance of 40 links; and a 25 inch White Pine South 50 degrees East a distance of 84 links.

1987 and 1988 United States Forest Service personnel search for corner and traverse the East line of the township. They find two Pine stumps that fit fairly close with the original.

1989 United States Forest Service personnel find stumps of original bearing trees. They tie true corner position into 1988 traverse of the West line of the township.

1990-1991 Landecker & Associates, Inc. review USFS search and traverse notes. They accept evidence of both pine stumps at bearing and distance as establishing the corner in its obliterated position of original corner and tie 60d spike set from stumps by USFS in 1989 while traversing the West line of the township. On February 2, 1991 the survey crew set a 2 inch by 48 inch iron pipe with brass cap monument up 18 inches. New bearing trees were marked as shown and a steel sign post set as noted on front of this certificate.