

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER


East Quarter Corner of Section 19, Township 141, Range 28, 5th P.M.

STATE OF MINNESOTA, County of Cass

At the corner location shown on the sketch:

- On 7/7/92 found a 2 inch General Land Office brass cap and
DATE
County iron pipe next to each other
 - left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____
DATE

Magnetic Decl: 5° East SKETCH OF REFERENCE TIES All distances are horizontal to nail in side of tree
 Not to Scale 6" Birch

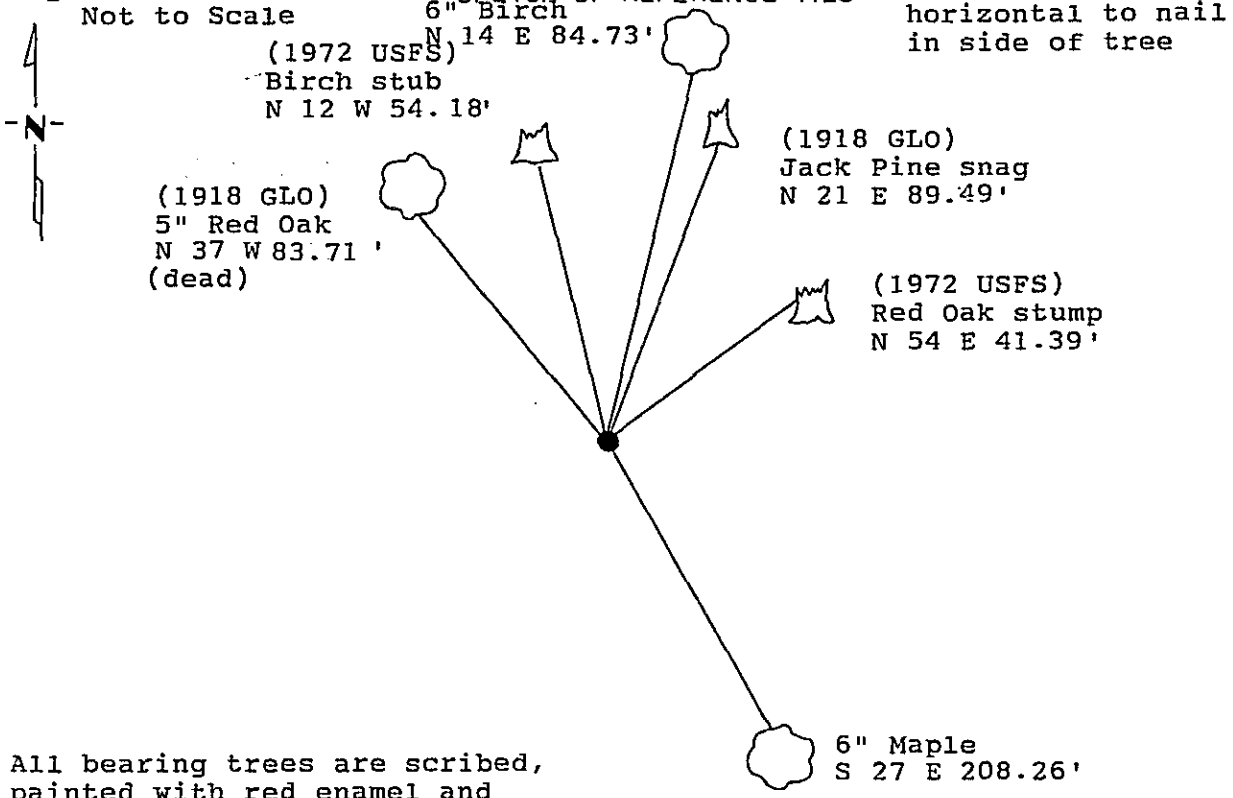

All bearing trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 341349

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman
 Terry L. Freeman
 Date 9/18/92 Registration No. 21367

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Co. Recorders office at 2:45 A. .M. on the 21 day of Sept A.D., 1992

County Recorder Charles K. Kuhl
 By me Deputy

DOCUMENT NO. 341349

Statement of Evidence:

East Quarter corner, Section 19, Township 141 North,
Range 28 West, Cass County, Minnesota

P-5

1874 P.H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 28 West. The notes indicate that he set a wood post 1 chain south of the north edge of a 2 chain long swamp and marked the following bearing tree: an 18 inch White Pine North 28 degrees East a distance of 118 links (77.88 feet).

1916 Cass County Surveyor's Office Record Book "B", Pages 384-390 and microfilm roll 11S, Book 77, Page 84, shows a survey by E.B. Horst. The notes indicate that he set a 2 and 1/2 inch by 48 inch capped monument at the lost, single proportionate position between the Northeast and Southeast corners.

1917 Cass County Surveyor's Office Record Book "C", Page 528 and microfilm roll 11S, Book 77, Page 106, shows a survey by E.B. Horst. The notes indicate that he found the 2 and 1/2 inch by 48 inch iron pipe as set in 1916.

1918 General Land Office records shows survey by Earl Harrington. The notes indicate that he found a 2 inch galvanized iron pipe at the proportionate position and also set a 1 inch by 36 inch iron pipe with brass cap and marked the following bearing trees: an 8 inch Jack Pine North 21 and 1/4 degrees East a distance of 136 links (89.76 feet); and a 5 inch Red Oak North 37 degrees West a distance of 128 links (84.48 feet).

1972 on November 9, United States Forest Service notes in Book 3 of Township 141 North, Range 28 West, Page 32 show survey by J. Ekstrom. The notes indicate that he found the 1918 General Land Office brass cap monument and 1916 County iron in good condition and the following 1918 bearing trees: Jack Pine snag and Oak clump at bearing and distance. He marked the following new bearing trees: an 8 inch Red Oak North 54 degrees East a distance of 41.60 feet; a 6 inch Birch North 12 degrees West a distance of 54.50 feet; and an 8 inch Red Oak North 37 degrees West a distance of 84.20 feet. A 6 foot steel sign post was set North 12.80 feet with 54-2 sign.

1973 on March 22, William Okerman, Registered Land Surveyor Number 6807, filed a Certificate of Location of Government Corner Number 911 showing the 1972 United States Forest Service information.

1992 on July 7, a Landecker & Associates of Walker, Inc., survey crew found the General Land Office brass cap monument and County iron next to each other. 1918 and 1972 bearing trees were found and new trees marked as shown on the front of this certificate. Landecker & Associates of Walker, Inc., accepts the 1918 General Land Office brass cap monument as monumenting the lost, single proportion position as established by the General Land Office in 1918.