

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Witness Corner to
East Quarter _____ Corner of Section 17, Township 141, Range 31, 5th P.M.

STATE OF MINNESOTA, County of Cass


At the corner location shown on the sketch:

- On 8/4/92 found a 2 inch capped iron pipe and stump of original Tamarack bearing tree.
 left monument as found, lowered monument, removed monument (explain)
- On _____ placed a _____

Magnetic Decl: 5° East
Not to Scale


SKETCH OF REFERENCE TIES

All distances are horizontal to nail in side of tree.



Monument is located in Shingobee River flow area up 4 inches in water.
 8' Steel sign post North .95 feet.
 8' Steel sign post South 2.00 feet.

Monument Stamped:
 WC 1/2
 S17+S16
 1992
 RLS 21367

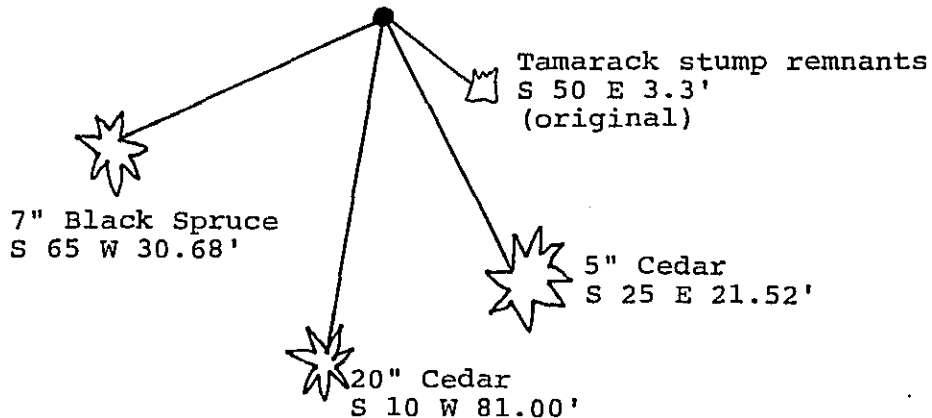

All bearing trees are scribed, painted with red enamel and marked with a 54-3 (bearing tree) tag.

Statement of evidence relative to this corner location is on back of page. 343556

I hereby certify that this survey, plan or report was prepared by me or under my direct supervision and that I am a duly Registered Land Surveyor under the laws of the State of Minnesota.

Terry L. Freeman
 Terry L. Freeman
 Date 12/8/92 Registration No. 21367

OFFICE OF THE COUNTY RECORDER
County of Cass

I hereby certify that this document was filed in the Co. Recorder's office at 3:05 P. M. on the 8 day of December A.D., 1992
 County Recorder Claudia Kayler
 By me Deputy
 DOCUMENT NO. 343556

Statement of Evidence:

Witness corner to East Quarter corner, Section 17,
Township 141 North, Range 31 West, Cass County,
Minnesota

L-9

1873 P.H. Conger, U.S. Deputy Surveyor, originally established this corner position while subdividing Township 141 North, Range 31 West. The notes indicate that he set a wood post and marked the following bearing trees: a 10 inch Tamarack South 50 degrees East a distance of 5 links (3.30 feet); and a 10 inch Tamarack South 8 degrees East a distance of 23 links (15.18 feet). The Quarter corner is located 1 chain North (66.00 feet).

1976 on November 12, United States Forest Service notes for Township 141 North, Range 31 West, in Book 2, page 2, show that technicians found a 2 inch capped iron pipe in place and a 10 inch Tamarack windfall South 9 feet with old Forest Service Location Poster. They set a 3 inch by 3 inch by 10 foot Tamarack post alongside found iron pipe.

1977 on June 13, United States Forest Service notes for Township 141 North, Range 31 West, in Book 2, page 2, show that United States Forest Service employees, Stefan and Krause, located the corner in survey of North County Trail.

1992 on August 4, a Landecker & Associates of Walker, Inc., survey crew found the 2 inch capped iron pipe with 1976 Tamarack post on south side. They also found the remains of a Tamarack stump (original) South 50 degrees East a distance of 3.3 feet and a 1953 Forest Service Location Poster on a 20 inch Cedar South 10 degrees West a distance of 81.00 feet.

1992 on November 23, a Landecker & Associates of Walker, Inc., survey crew marked new bearing trees and set steel sign posts as shown on front of this certificate.

Note: Although there is no record of the 2 inch capped iron pipe being set, it appears to be of County Surveyor origin. With the remnants of the original bearing tree being found, Landecker & Associates of Walker, Inc., accepts the found iron as a perpetuation of the original corner.