


CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

Meander Corner on the north shore of Wilson Lake, common to Sections 23 and 24, Township 142 North, Range 26 West, of the Fifth Principal Meridian, Cass County, Minnesota. In July, 1997, Northern Lights Surveying and Mapping set an aluminum capped aluminum rod as a mathematical perpetuation of the original General Land Office (G.L.O.) meander corner

SKETCH OF REFERENCE TIES & EVIDENCE

T.142N., R.26W.




Section 23

Section 24

NOT TO SCALE

Bearings are Grid North, Minnesota Central Zone, measured with a hand compass adjusted to 3° East declination.

New bearing trees were blazed, scribed & painted red. A tag stating the bearing & distance was affixed to the tree. A nail was placed in the base of the tree and the distance was measured from the monument to the nail.

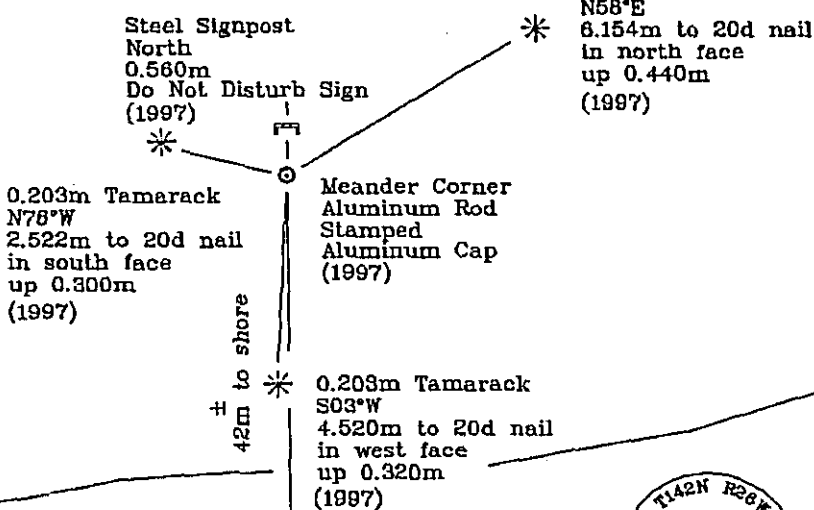

Wilson

Lake



395071

Statement of evidence relative to this corner location is on the back of this page

I hereby certify that this survey, plan, or report was prepared by me or under my direct supervision and that I am a duly Licensed Land Surveyor under the laws of the State of Minnesota.

DeVerne Leuelling 11-16-97
 DeVerne Leuelling Date

Registered Land Surveyor No. 16089
 NORTHERN LIGHTS SURVEYING & MAPPING

OFFICE OF THE COUNTY RECORDER
 County of Cass

I hereby certify that this document was filed in the Recorder's office.

Time: 3:58 P.M. Date: Dec. 8, 1997

Recorder Claudine Kayler

By K.S. Deputy

DOCUMENT NO. 395071

Statement of Evidence

Meander Corner on the north shore of Wilson Lake, common to Sections 23 and 24, Township 142 North, Range 28 West, of the Fifth Principal Meridian, Cass County, Minnesota 1872; General Land Office (G.L.O.) survey notes; Deputy Surveyor E.W. Griffin set a wooden post for the meander corner and referenced it with the following:

8" Spruce (0.203m)	8" Spruce (0.152m)
West	S89°E
8 Links (1.609m)	14 Links (2.816m)

Said records are on file with the Secretary of State, St. Paul, Minnesota; copies of these records are on file with the Cass County Surveyor's Office, Walker, Minnesota.

1921; Cass County Survey Record 457; County Book "C", p.415; Cass County Surveyor James Flynn recovered the G.L.O. witness evidence during a retracement survey and subdivision of Section 26, T.142N., R.28W. He recovered the following 6559 feet (1999.187m) north of the Section Corner common to Sections 25, 26, 35, and 38:

(G.L.O.)	(G.L.O.)
8" Spruce Stump (0.203m)	8" Spruce (down) (0.152m)
West	S89°E
8 Links (1.609m)	14 Links (2.816m)

He then established:

0.102m Tamarack	0.102m Tamarack
N42°W	N61°E
2.585m	0.813m

October, 1988; Curt Krause of the United States Department of Agriculture-Forest Service (U.S.D.A.-F.S.) cruised to the approximate meander corner position from the Quarter Corner common to Sections 23 and 24 and searched for evidence of the G.L.O. and county surveys. No evidence was found. (U.S.D.A.-F.S. T142N., R.28W. Field Book #2, p.81)

December, 1996; Northern Lights Surveying and Mapping, Inc. conducted searches of the area of the corner for evidence, but found none. A Global Positioning System (G.P.S.) session was also conducted during the searches.

July 10, 1997; Northern Lights Surveying and Mapping, Inc. crew of Smith and Gerving searched for Flynn's bearing trees and then set a 3.658m long, 0.019m diameter aluminum rod with a stamped 0.083m diameter aluminum cap up 0.200m for the meander corner and referenced it with the following:

0.203m Tamarack	0.833m Spruce	0.203m Tamarack	Steel Signpost
S03°W	N58°E	N78°W	North
4.520m to 20d nail	6.154m to 20d nail	2.522m to 20d nail	0.560m
in west face	in north face	in south face	Do Not Disturb Sign
up 0.320m	up 0.440m	up 0.300m	
scribed S23BT	scribed S24BT	scribed S23BT	

The position was located according to Flynn's 1999.187m distance from the southeast corner of Section 26 in the absence of any found field evidence.

Northern Lights Surveying and Mapping, Inc. Slater Township Field Book #3, p. 23.

Coordinates

Cass County North

Northing = 63,043.896 meters
Easting = 174,612.061 meters

State Plane Coordinate System
Minnesota Central Zone
NAD 83

Northing = 333,038.722 meters
Easting = 824,741.279 meters

Latitude = 47°05'48.08834" North
Longitude = 93°55'26.81045" West