



8 0 0 0 0 1 0
Tx:400008

A000555046

**OFFICE OF COUNTY RECORDER
CASS COUNTY MINNESOTA**

**CERTIFIED, FILED, AND/OR
RECORDED ON
11/03/2009 10:55 AM**

A000555046

PAGES: 2 REC FEES: 0.00

**KATHRYN M. NORBY
COUNTY RECORDER**


Index No. 1-25

CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

EAST QUARTER Corner of Section 25, Township 136 N, Range 30 W
5TH Principal Meridian, State of Minnesota, County of CASS

At the corner location shown on the sketch:

- On 3/5/09 found a 2" iron pipe 0.6' below the surface, 4.5' west of
DATE the centerline of gravel road
 - left monument as found, lowered monument, removed monument (explain)
- On _____ Placed a _____
DATE _____

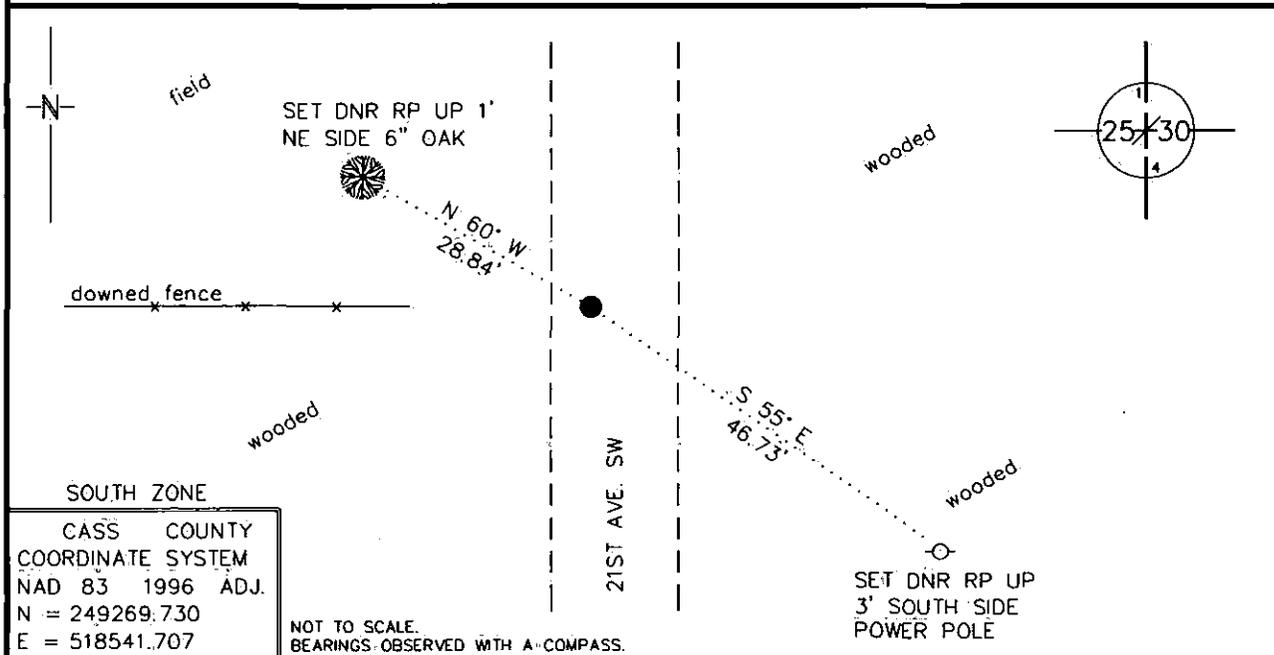

Statement of evidence for this corner location is on back of this page.

RAL MARCH 2009
FMA00300.00.00.01

I certify that this document was researched and prepared by me or under my direct supervision:

SIGNATURE Joseph J. Fleister DATE 10/26/09 License Number 44974

Title: Land Surveyor Professional Engineer County Surveyor County Engineer

STATEMENT OF EVIDENCE**East Quarter Corner Section 25, Township 136 North, Range 30 West, 5th P.M.**

The Department of Natural Resources, Division of Lands and Minerals, contacted the following offices for information regarding this corner:

MN Secretary of State
Cass County Recorder
Cass County Surveyor
Landecker and Associates, Inc.

- 1858 The US General Land Office field notes, on file in the Secretary of State's office, indicate a post set at the corner with the following bearing trees:

10" Pine	S 82 1/2° W	12 Links (7.92')
10" Pine	S 44 1/2° E	21 Links (13.86')

- 1916 Field notes from a survey by E. B. Horst, County Surveyor, in Survey Record Book B, pages 334-338, on file in the Cass County Surveyor's office state that he found both GLO bearing tree stumps and set a 2" x 48" iron monument at the corner and made new ties as follows:

5" J. Pine	S 49° W	55.40 feet
5" J. Pine	East	33.50 feet

- 2007 A Landecker and Associates, Inc. survey crew found a 2" iron pipe at the corner during the course of a survey in Section 30, Township 136 N, Range 29 W.
- 2009 In March, a DNR survey crew found a 2" iron pipe, 0.6 feet below the surface and 4.5 feet west of the centerline of a gravel road. A search was made for the bearing trees but none were recovered. The iron pipe was accepted as the monument set at the corner by Horst in 1916 and new ties were created.

The Northeast Corner of Section 25 bears N 00°30'12" W 2669.30'.

The Southeast Corner of Section 25 bears S 01°07'33" E 2647.58'.

For more information on our survey in this area, please contact the MN DNR, Division of Lands and Minerals, Survey Section, 1601 Minnesota Drive, Brainerd, MN 56401.