


# CERTIFICATE OF LOCATION OF GOVERNMENT CORNER

N1/4 Corner of Section 11, Township 139N, Range 28W, 5th p.m., State of Minnesota, County of Cass

At the corner location shown on the sketch:  
 On 12/02/2010 found a 2" Iron pipe up 1.5' +/- for corner  
 Date

left monument as found      lowered monument      removed monument (explain)  
 On \_\_\_\_\_ placed a \_\_\_\_\_  
 Date

SKETCH OF REFERENCE TIES

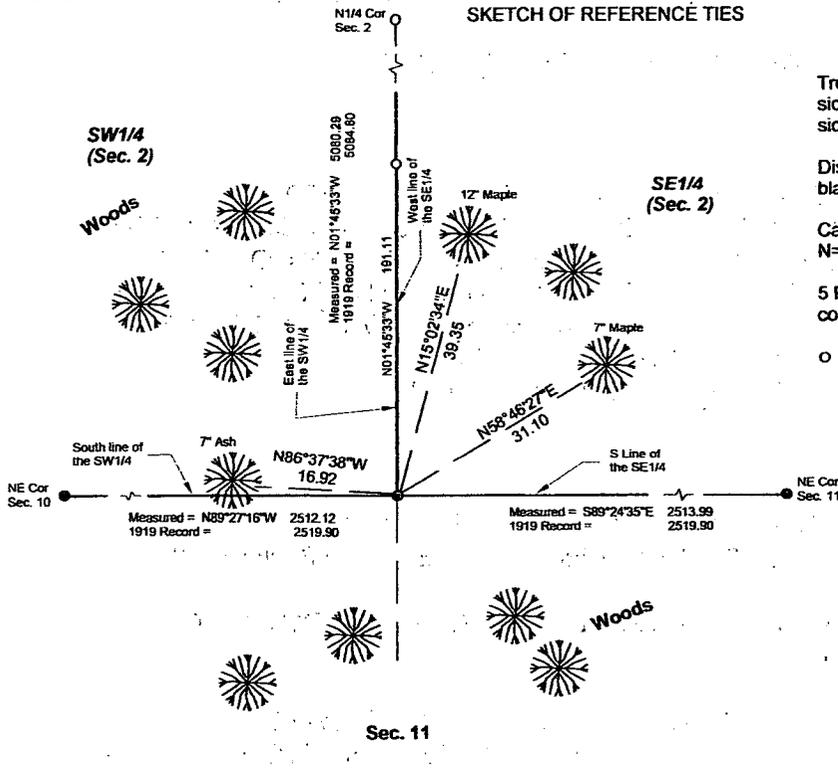

Tree ties have double blaze with a side blaze. Ribbed pole barn nail in side blaze.

Distances measured to nail in side blaze.

Cass County Coordinate System (North Zone)  
 N=126768.2652 E=508196.0708

5 Foot fence post and sign placed by corner pipe.

o Set Re-Rod with RLS cap No. 17774



NOT TO SCALE

Statement of evidence relative to this corner location is on back of page.

I hereby certify that this document and the data contained herein was prepared by me or under my direct supervision.

*Marvin R. Kohout* 1/13/11  
 Marvin R. Kohout Date

Registration No. 17774

Land surveyor

**A000567746**  
**OFFICE OF COUNTY RECORDER**  
**CASS COUNTY MINNESOTA**  
**CERTIFIED, FILED, AND/OR**  
**RECORDED ON**  
**01/31/2011 08:35:30 AM**  
**AS DOC #: A000567746**  
**PAGES: 2 REC FEES: 0.00**  
**KATHRYN M. NORBY**  
**COUNTY RECORDER**



STATEMENT OF EVIDENCE:

**NORTH QUARTER CORNER OF SECTION 11, TWP. 139 N., RGE. 28 W**

1864 APRIL DEPUTY SURVEYORS JOHNSON AND THORNTON IN THE ORIGINAL GOVERNMENT SURVEY SET A POST.  
TIES: 8" ASPEN N 75 E 5 LINKS (3.3 FEET)  
7" ASPEN S 20 W 18 LINKS (11.88 FEET)

1914 TOWNSHIP ROAD ORDER (NO SURVEY)

1919 SEPT. BEN F. CLARK, LS #231, FOR A CONTRACTED COUNTY SUBDIVISION FILED IN THE OFFICE OF THE COUNTY RECORDER ON MARCH 3, 1922 AS DOC. NO. 69793. IN COUNTY SURVEYS BOOK C, PAGE 321 CLARK INDICATED HE SET A 2-1/2" x 48" IRON PIPE ON LINE AND MIDWAY BETWEEN THE SW SEC. CORNER AND THE SE SEC. CORNER.  
NEW TIE : 7" POPLAR S 47 W 18.20

1938 CIVILIAN CONSERVATION CORPS SETS AN APPROXIMATE CORNER 2640 FEET WEST OF THE SE CORNER OF SEC. 2

2003 FEB LAND DEPT. – JERRY LAMON FOUND PIPE DOWN STOOD UP.

2010 DEC. MARVIN R. KOHOUT, LS #17774 AND CREW FOUND A 2" DIAMETER IRON PIPE, UP 1.5 FEET, AND CLOSE TO BEING ON LINE AND MIDWAY BETWEEN THE SW SEC. COR. AND THE SE SEC. COR. THE FOUND PIPE WAS ACCEPTED AS THE S ¼ COR.

DIRECTION AND DISTANCE TO:

FOUND SOUTHEAST CORNER S 89-24-35 E 2513.99  
FOUND SOUTHWEST CORNER N 89-27-16 W 2512.12  
ESTABLISHED NORTH ¼ CORNER N 01-45-33 W 5080.29